
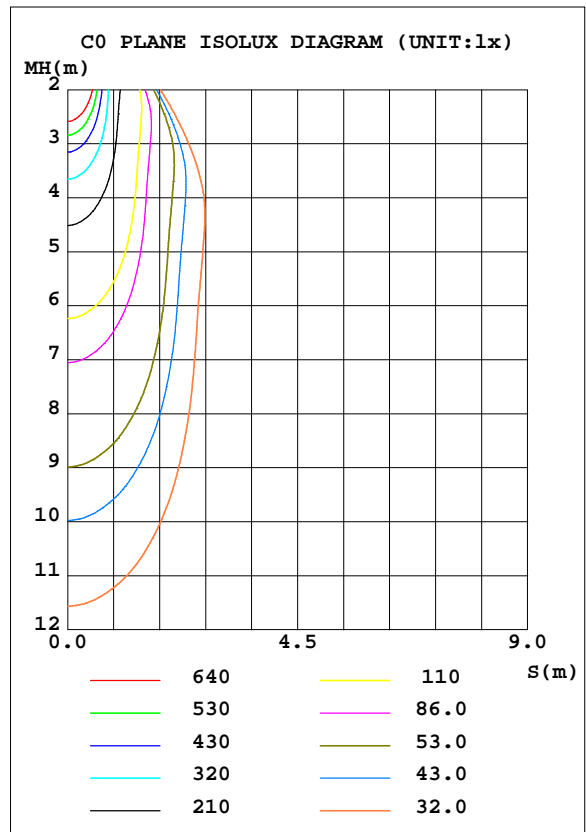


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.60V I:0.1460A P:29.500W PF:0.9840 Freq:50.00Hz		
Lamp Flux:2401.68x1 lm		
Name: NS26-φ95MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D95*80mm	
	SUR.: D75mm	

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		I _{max} (cd)	4278	S/MH(C0/180)	0.57
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	0.58
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2401.7	η UP, DN(C0-180)	1.4, 48.6
NOMINAL FLUX(lm)	2401.68	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.4, 48.6
LAMPS INSIDE	1	η up(%)	2.8	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	221.6	η down(%)	97.2	CIBSE SHR MAX	0.60

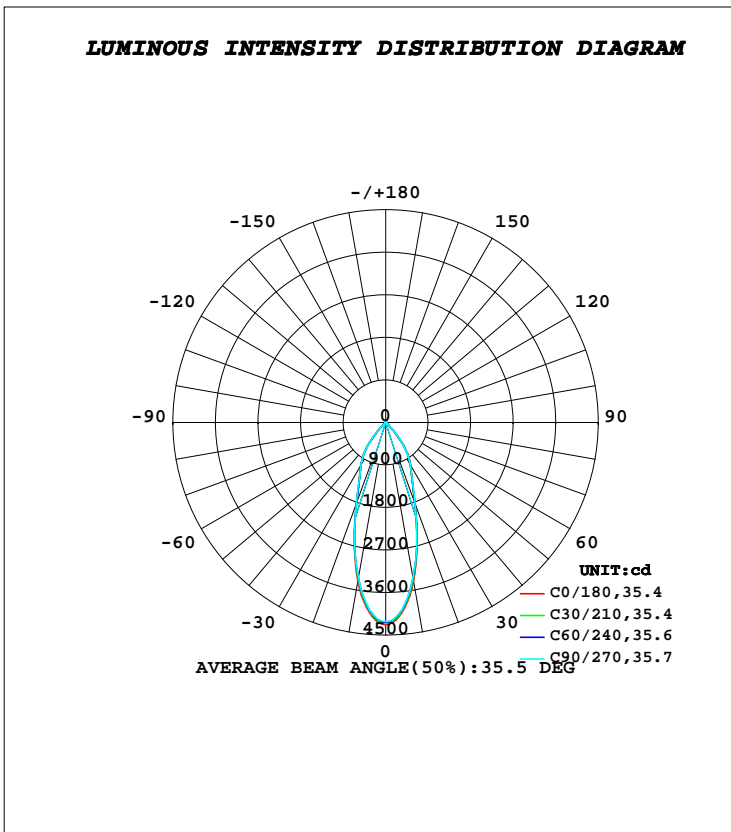

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	3409	3357	3338	3357	3409	3357	3338	3357	0- 10	361.1	361.1	15,15
20	1812	1808	1816	1808	1812	1808	1816	1808	10- 20	703.5	1065	44.3,44.3
30	1057	1051	1051	1051	1057	1051	1051	1051	20- 30	620.6	1685	70.2,70.2
40	472.4	463.7	463.4	463.7	472.4	463.7	463.4	463.7	30- 40	485.6	2171	90.4,90.4
50	30.02	29.77	30.05	29.77	30.02	29.77	30.05	29.77	40- 50	139.2	2310	96.2,96.2
60	6.771	4.826	3.564	4.826	6.771	4.826	3.564	4.826	50- 60	10.06	2320	96.6,96.6
70	6.399	4.036	2.561	4.036	6.399	4.036	2.561	4.036	60- 70	4.542	2325	96.8,96.8
80	5.801	3.928	2.643	3.928	5.801	3.928	2.643	3.928	70- 80	4.214	2329	97,97
90	7.223	4.755	3.204	4.755	7.223	4.755	3.204	4.755	80- 90	4.881	2334	97.2,97.2
100	3.679	3.609	3.442	3.609	3.679	3.609	3.442	3.609	90-100	4.044	2338	97.3,97.3
110	5.320	5.349	5.219	5.349	5.320	5.349	5.219	5.349	100-110	4.546	2342	97.5,97.5
120	8.178	8.253	8.150	8.253	8.178	8.253	8.150	8.253	110-120	6.619	2349	97.8,97.8
130	12.30	12.38	12.30	12.38	12.30	12.38	12.30	12.38	120-130	9.092	2358	98.2,98.2
140	17.43	17.46	17.34	17.46	17.43	17.46	17.34	17.46	130-140	11.43	2369	98.7,98.7
150	22.24	22.27	22.18	22.27	22.24	22.27	22.18	22.27	140-150	12.46	2382	99.2,99.2
160	24.21	24.33	24.33	24.33	24.21	24.33	24.33	24.33	150-160	10.91	2393	99.6,99.6
170	23.30	23.21	23.10	23.21	23.30	23.21	23.10	23.21	160-170	6.800	2400	99.9,99.9
180	22.49	22.51	22.52	22.51	22.49	22.51	22.52	22.51	170-180	2.173	2402	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.60V I:0.1460A P:29.500W PF:0.9840 Freq:50.00Hz		
Lamp Flux:2401.68x1 lm		
Name: NS26-φ95MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D95*80mm	
	SUR.: D75mm	

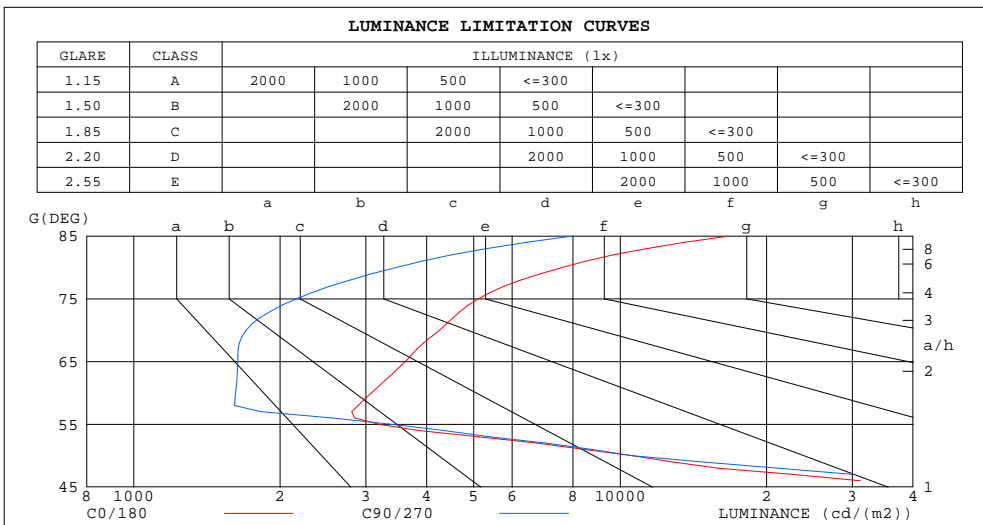

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	16666	7950
80	7592	3459
75	5105	2157
70	4252	1702
65	3614	1637
60	3078	1620
55	3203	3403
50	10614	10627
45	44359	52452


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.60V I:0.1460A P:29.500W PF:0.9840 Freq:50.00Hz		
Lamp Flux:2401.68x1 lm		
Name: NS26-φ95MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D95*80mm	
	SUR.: D75mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.03	1.01	.00	.99	.98	.96	.95	.94	.93	.91
2.0	1.03	.99	.96	1.01	.97	.94	.97	.94	.92	.94	.91	.89	.91	.89	.87	.85
3.0	.96	.91	.87	.95	.90	.87	.92	.88	.85	.89	.86	.83	.86	.84	.82	.80
4.0	.90	.85	.81	.89	.84	.80	.86	.82	.79	.84	.80	.78	.82	.79	.76	.75
5.0	.85	.79	.75	.84	.78	.74	.82	.77	.74	.80	.76	.73	.78	.74	.72	.70
6.0	.80	.74	.70	.79	.73	.70	.77	.72	.69	.75	.71	.68	.74	.70	.68	.66
7.0	.75	.70	.66	.75	.69	.65	.73	.68	.65	.72	.67	.64	.70	.67	.64	.62
8.0	.71	.66	.62	.71	.65	.61	.69	.64	.61	.68	.64	.61	.67	.63	.60	.59
9.0	.68	.62	.58	.67	.62	.58	.66	.61	.58	.65	.60	.57	.64	.60	.57	.56
10.0	.64	.59	.55	.64	.59	.55	.63	.58	.55	.62	.57	.54	.61	.57	.54	.53

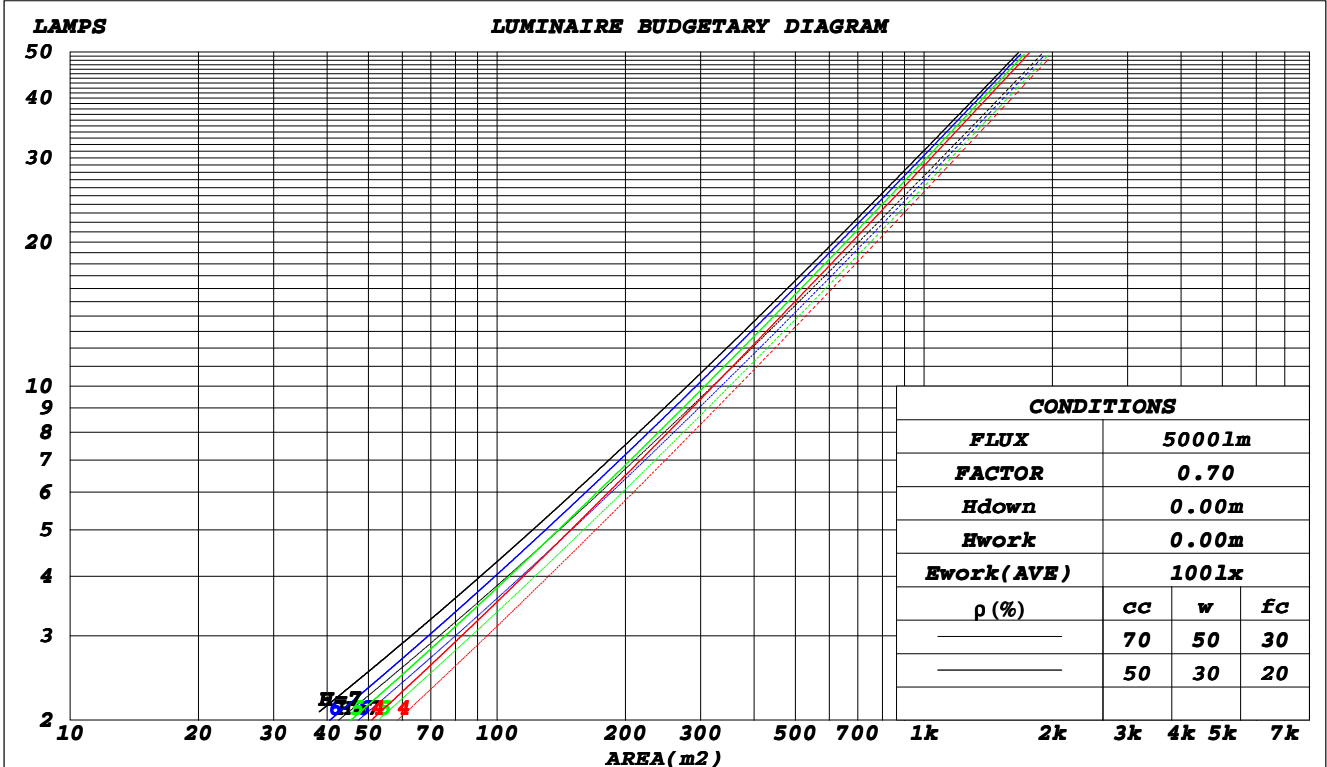

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.60V I:0.1460A P:29.500W PF:0.9840 Freq:50.00Hz		
Lamp Flux:2401.68x1 lm		
Name: NS26-φ95MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D95*80mm	
	SUR.: D75mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.176	.100	.032	.168	.096	.030	.154	.088	.028	.141	.081	.026	.129	.075	.024	
2.0	.167	.091	.028	.160	.088	.027	.148	.083	.026	.137	.077	.024	.127	.072	.023	
3.0	.158	.084	.025	.153	.082	.025	.142	.077	.023	.133	.073	.022	.124	.069	.021	
4.0	.150	.078	.023	.145	.076	.023	.136	.072	.022	.128	.069	.021	.120	.065	.020	
5.0	.143	.073	.021	.139	.071	.021	.131	.068	.020	.123	.065	.019	.116	.062	.019	
6.0	.136	.068	.020	.133	.067	.019	.125	.064	.019	.119	.062	.018	.113	.059	.018	
7.0	.130	.064	.018	.127	.063	.018	.120	.061	.018	.115	.059	.017	.109	.057	.017	
8.0	.124	.061	.017	.121	.060	.017	.116	.058	.017	.110	.056	.016	.105	.054	.016	
9.0	.119	.058	.016	.116	.057	.016	.111	.055	.016	.106	.053	.015	.102	.052	.015	
10.0	.114	.055	.015	.112	.054	.015	.107	.052	.015	.103	.051	.014	.098	.050	.014	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.212	.212	.212	.181	.181	.181	.124	.124	.124	.071	.071	.071	.023	.023	.023	
1.0	.193	.179	.167	.165	.154	.144	.113	.106	.099	.065	.061	.058	.021	.020	.019	
2.0	.177	.154	.135	.152	.133	.117	.104	.092	.081	.060	.054	.048	.019	.017	.016	
3.0	.165	.136	.112	.141	.117	.097	.097	.081	.068	.056	.047	.040	.018	.015	.013	
4.0	.155	.121	.095	.133	.104	.083	.091	.073	.058	.053	.043	.034	.017	.014	.011	
5.0	.146	.109	.082	.125	.095	.072	.086	.066	.051	.050	.039	.030	.016	.013	.010	
6.0	.138	.100	.073	.119	.087	.063	.082	.061	.045	.048	.036	.027	.015	.012	.009	
7.0	.132	.092	.065	.113	.080	.057	.078	.056	.040	.046	.033	.024	.015	.011	.008	
8.0	.126	.086	.059	.108	.075	.051	.075	.053	.036	.044	.031	.022	.014	.010	.007	
9.0	.121	.081	.054	.104	.070	.047	.072	.049	.034	.042	.029	.020	.014	.010	.007	
10.0	.116	.077	.050	.100	.067	.044	.070	.047	.031	.041	.028	.019	.013	.009	.006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.60V I:0.1460A P:29.500W PF:0.9840 Freq:50.00Hz		
Lamp Flux:2401.68x1 lm		
Name: NS26-φ95MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D95*80mm	
	SUR.: D75mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.2	23.1	22.5	23.4	23.6	22.2	23.1	22.4	23.3	23.5
3H	22.1	22.9	22.4	23.1	23.4	22.0	22.8	22.3	23.1	23.3
4H	22.0	22.8	22.3	23.0	23.3	21.9	22.7	22.2	22.9	23.2
6H	21.9	22.7	22.3	23.0	23.3	21.8	22.5	22.2	22.8	23.1
8H	21.9	22.6	22.3	22.9	23.2	21.8	22.5	22.1	22.8	23.1
12H	21.9	22.6	22.3	22.9	23.2	21.7	22.4	22.1	22.7	23.1
4H 2H	22.0	22.8	22.3	23.0	23.3	21.9	22.7	22.2	22.9	23.2
3H	21.8	22.5	22.2	22.8	23.1	21.7	22.4	22.1	22.7	23.0
4H	21.7	22.3	22.1	22.7	23.0	21.6	22.2	22.0	22.6	22.9
6H	21.7	22.2	22.1	22.6	23.0	21.5	22.1	21.9	22.4	22.8
8H	21.7	22.2	22.1	22.6	23.0	21.5	22.0	21.9	22.4	22.8
12H	21.7	22.2	22.2	22.6	23.0	21.5	21.9	21.9	22.3	22.8
8H 4H	21.6	22.1	22.0	22.5	22.9	21.5	22.0	21.9	22.4	22.8
6H	21.5	21.9	22.0	22.4	22.9	21.4	21.8	21.9	22.2	22.7
8H	21.6	21.9	22.1	22.4	22.9	21.4	21.7	21.8	22.2	22.7
12H	21.7	22.0	22.2	22.5	23.0	21.3	21.7	21.9	22.1	22.7
12H 4H	21.5	22.0	22.0	22.4	22.8	21.4	21.9	21.9	22.3	22.7
6H	21.5	21.8	22.0	22.3	22.8	21.3	21.7	21.8	22.2	22.7
8H	21.5	21.8	22.0	22.3	22.8	21.3	21.6	21.8	22.1	22.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.1 / - 9.8					+ 3.1 / -12.6				
1.5H	+ 5.6 / - 9.9					+ 5.6 / -12.4				
2.0H	+ 6.4 / - 2.6					+ 7.7 / - 5.1				

CIE Pub.117, 2402 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.0)
 Area: 0.0044 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.60V I:0.1460A P:29.500W PF:0.9840 Freq:50.00Hz Lamp Flux:2401.68x1 lm		
Name: NS26-φ95MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D95*80mm	
	SUR.: D75mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	79	75	85	79	75	84	78	75	71
0.80	93	87	83	92	87	83	91	86	83	79
1.00	98	92	88	97	91	88	95	91	87	83
1.25	102	96	93	101	96	92	98	94	91	87
1.50	105	100	96	103	99	96	101	97	94	89
2.00	107	103	100	106	102	99	103	100	97	91
2.50	109	105	102	107	104	101	104	101	99	92
3.00	111	107	104	109	106	103	105	102	100	93
4.00	113	110	108	110	108	106	106	104	103	95
5.00	114	112	110	112	110	108	107	106	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.60V I:0.1460A P:29.500W PF:0.9840 Freq:50.00Hz		
Lamp Flux:2401.68x1 lm		
Name: NS26-φ95MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D95*80mm	
	SUR.: D75mm	

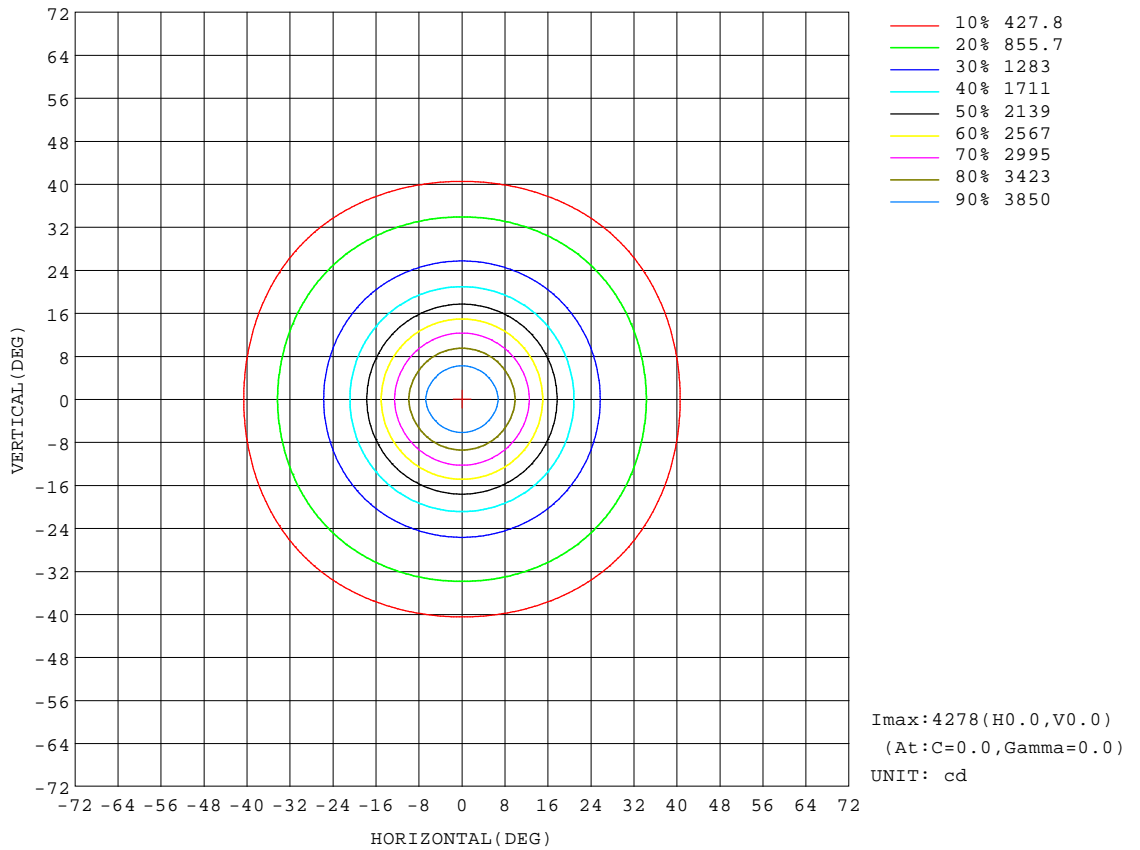


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.60V I:0.1460A P:29.500W PF:0.9840 Freq:50.00Hz		
Lamp Flux:2401.68x1 lm		
Name: NS26-φ95MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D95*80mm	
	SUR.: D75mm	

Flux out:926.0 lm

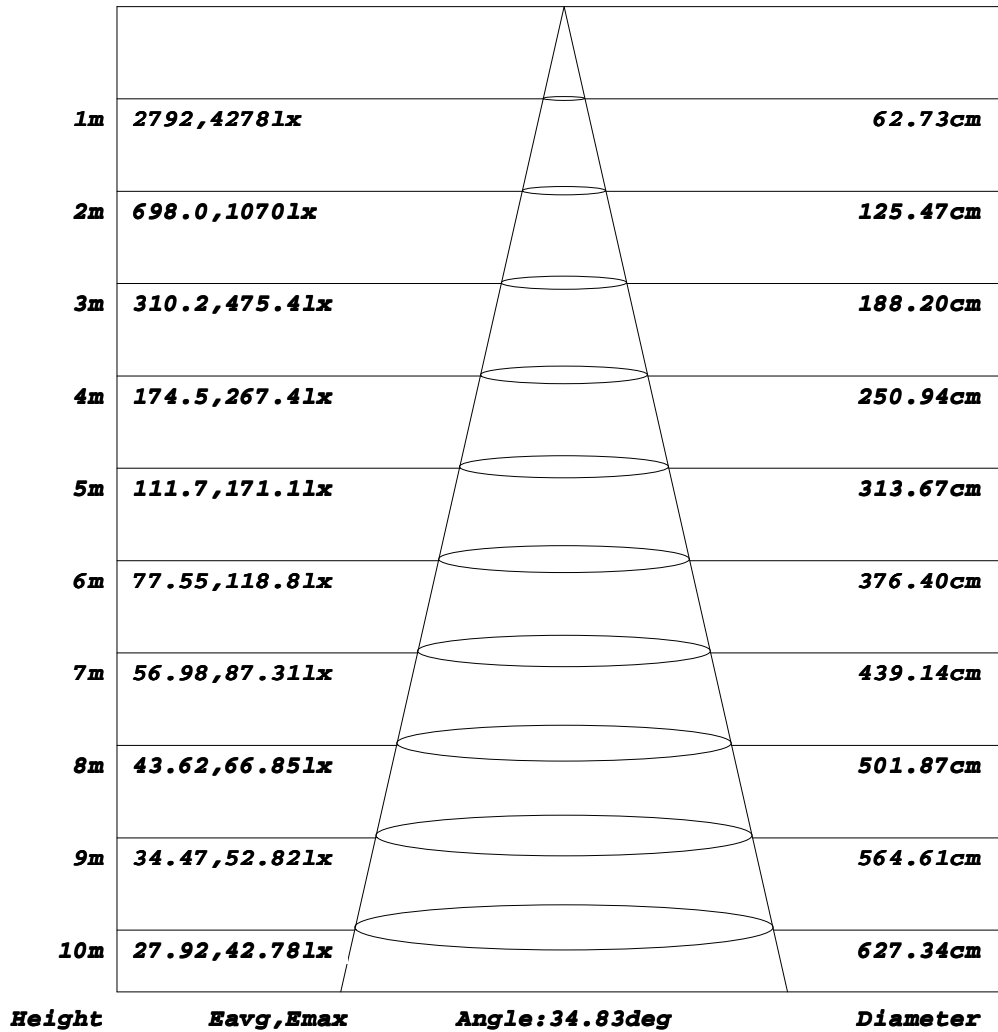


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.60V I:0.1460A P:29.500W PF:0.9840 Freq:50.00Hz		
Lamp Flux:2401.68x1 lm		
Name: NS26-φ95MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D95*80mm	
	SUR.: D75mm	

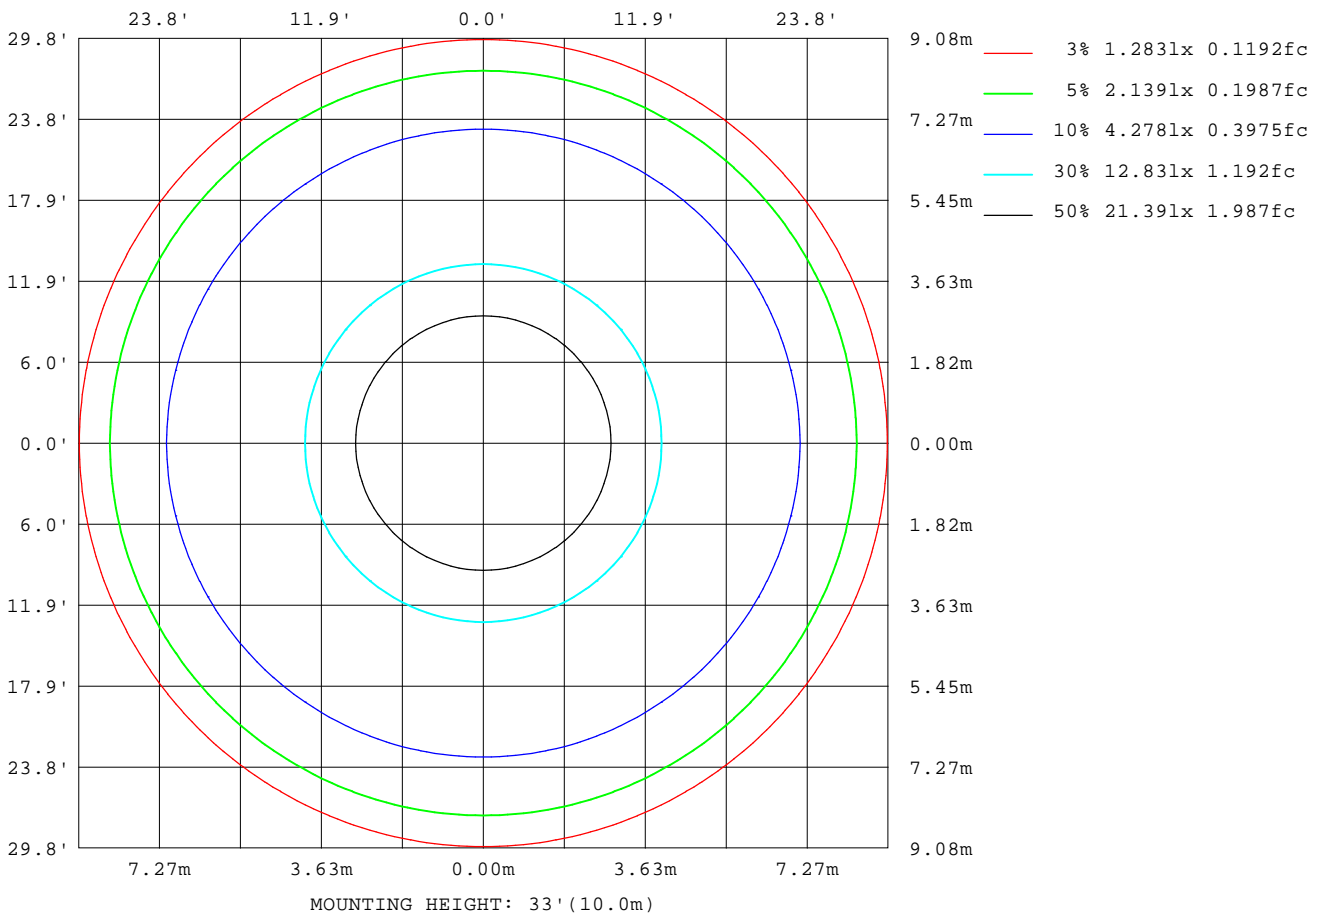

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

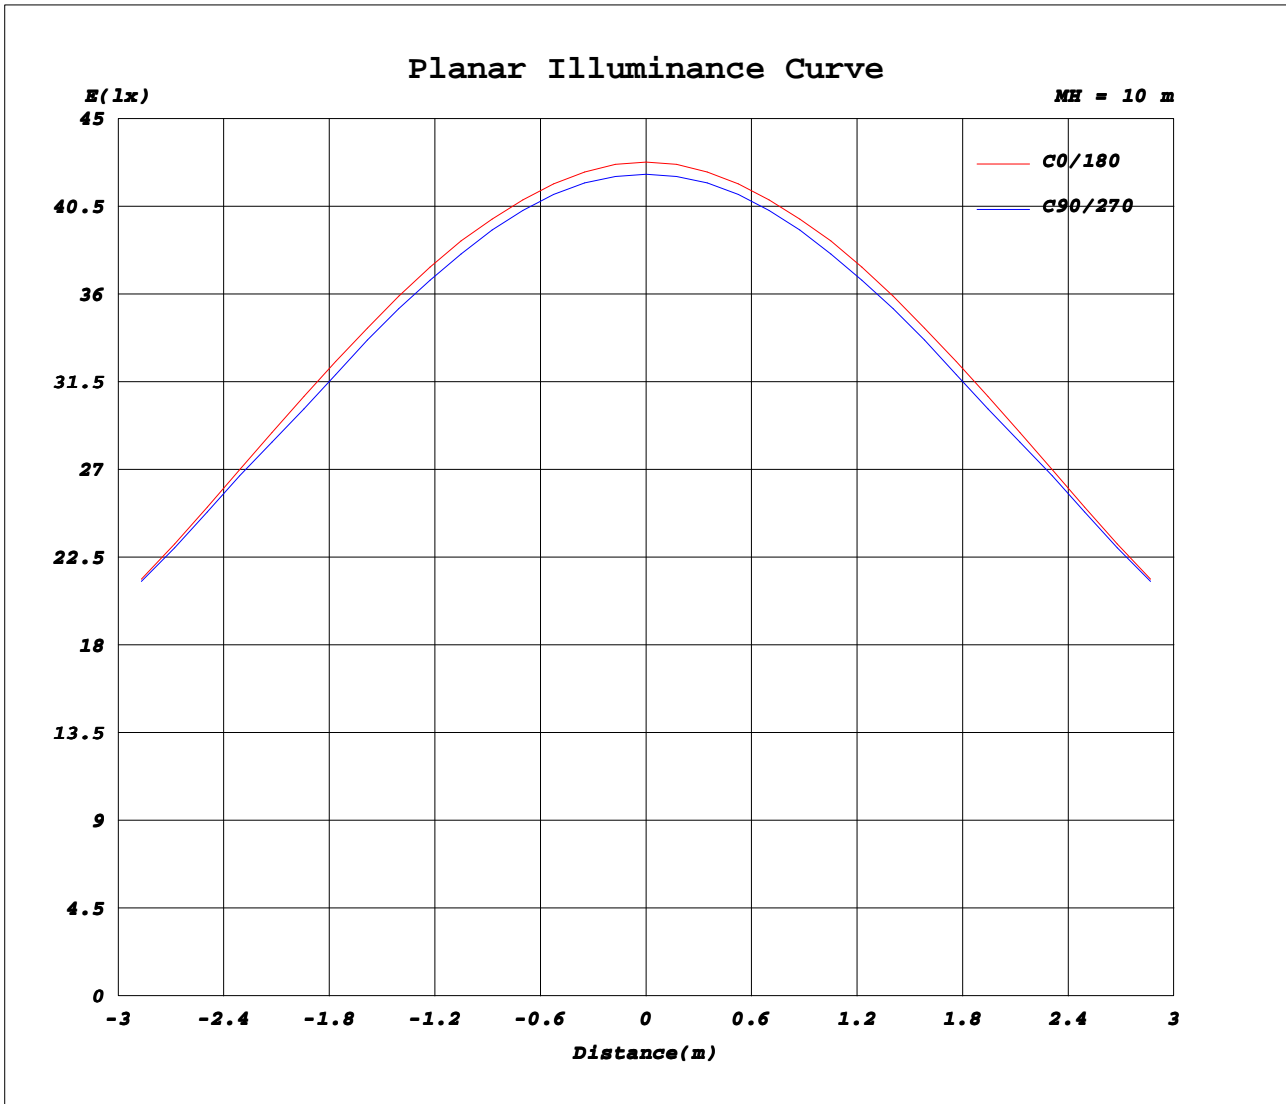

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.60V I:0.1460A P:29.500W PF:0.9840 Freq:50.00Hz		
Lamp Flux:2401.68x1 lm		
Name: NS26-φ95MM-30W	Type: LED	
MFR.: Lumega Group	DIM.: D95*80mm	
	SUR.: D75mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	4278	4251	4228	4215	4228	4251	4278	4251	4228	4215	4228	4251							
5	4031	4002	3982	3974	3982	4002	4031	4002	3982	3974	3982	4002							
10	3409	3369	3345	3338	3345	3369	3409	3369	3345	3338	3345	3369							
15	2574	2553	2547	2550	2547	2553	2574	2553	2547	2550	2547	2553							
20	1812	1806	1809	1816	1809	1806	1812	1806	1809	1816	1809	1806							
25	1332	1328	1328	1330	1328	1328	1332	1328	1328	1330	1328	1328							
30	1057	1052	1051	1051	1051	1052	1057	1052	1051	1051	1051	1052							
35	817	803	795	792	795	803	817	803	795	792	795	803							
40	472	465	462	463	462	465	472	465	462	463	462	465							
45	138	147	156	163	156	147	138	147	156	163	156	147							
50	30.0	29.7	29.8	30.1	29.8	29.7	30.0	29.7	29.8	30.1	29.8	29.7							
55	8.08	8.24	8.44	8.59	8.44	8.24	8.08	8.24	8.44	8.59	8.44	8.24							
60	6.77	5.40	4.25	3.56	4.25	5.40	6.77	5.40	4.25	3.56	4.25	5.40							
65	6.72	5.12	3.81	3.04	3.81	5.12	6.72	5.12	3.81	3.04	3.81	5.12							
70	6.40	4.72	3.35	2.56	3.35	4.72	6.40	4.72	3.35	2.56	3.35	4.72							
75	5.81	4.41	3.20	2.46	3.20	4.41	5.81	4.41	3.20	2.46	3.20	4.41							
80	5.80	4.50	3.36	2.64	3.36	4.50	5.80	4.50	3.36	2.64	3.36	4.50							
85	6.39	4.97	3.77	3.05	3.77	4.97	6.39	4.97	3.77	3.05	3.77	4.97							
90	7.22	5.47	4.04	3.20	4.04	5.47	7.22	5.47	4.04	3.20	4.04	5.47							
95	3.01	3.10	3.08	3.01	3.08	3.10	3.01	3.10	3.08	3.01	3.08	3.10							
100	3.68	3.66	3.56	3.44	3.56	3.66	3.68	3.66	3.56	3.44	3.56	3.66							
105	4.21	4.29	4.25	4.15	4.25	4.29	4.21	4.29	4.25	4.15	4.25	4.29							
110	5.32	5.38	5.32	5.22	5.32	5.38	5.32	5.38	5.32	5.22	5.32	5.38							
115	6.61	6.69	6.65	6.55	6.65	6.69	6.61	6.69	6.65	6.55	6.65	6.69							
120	8.18	8.27	8.24	8.15	8.24	8.27	8.18	8.27	8.24	8.15	8.24	8.27							
125	10.1	10.2	10.1	10.0	10.1	10.2	10.1	10.2	10.1	10.0	10.1	10.2							
130	12.3	12.4	12.4	12.3	12.4	12.4	12.3	12.4	12.4	12.3	12.4	12.4							
135	14.7	14.8	14.8	14.8	14.8	14.8	14.7	14.8	14.8	14.8	14.8	14.8							
140	17.4	17.5	17.4	17.3	17.4	17.5	17.4	17.5	17.4	17.3	17.4	17.5							
145	20.0	20.0	20.0	19.9	20.0	20.0	20.0	20.0	20.0	19.9	20.0	20.0							
150	22.2	22.3	22.3	22.2	22.3	22.3	22.2	22.3	22.3	22.2	22.3	22.3							
155	23.8	23.9	23.9	23.8	23.9	23.9	23.8	23.9	23.9	23.8	23.9	23.9							
160	24.2	24.3	24.4	24.3	24.4	24.3	24.2	24.3	24.4	24.3	24.4	24.3							
165	24.0	24.0	24.1	24.0	24.1	24.0	24.0	24.0	24.1	24.0	24.1	24.0							
170	23.3	23.2	23.2	23.1	23.2	23.2	23.3	23.2	23.2	23.1	23.2	23.2							
175	22.6	22.5	22.5	22.4	22.5	22.5	22.6	22.5	22.5	22.4	22.5	22.5							
180	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: