
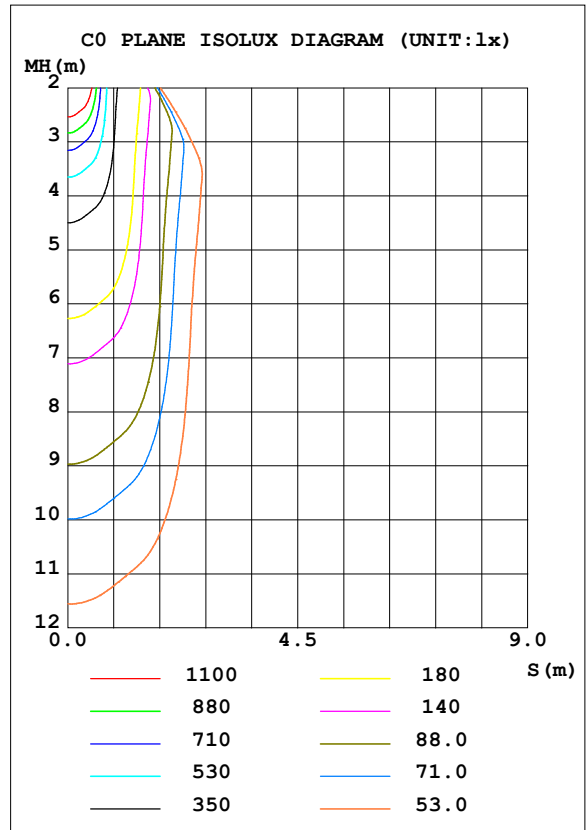


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.40V I:0.1640A P:35.600W PF:0.9810 Freq:50.00Hz		
Lamp Flux:3783.22x1 lm		
Name: NS27-35W	Type: LED	
MFR.: Lumega		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.27 lm/W			
MODEL		I _{max} (cd)	7115	S/MH (C0/180)	0.53
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	0.54
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	3783.2	η UP, DN (C0-180)	0.3, 50.5
NOMINAL FLUX (lm)	3783.22	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 48.5
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	99.0	CIBSE SHR MAX	0.55

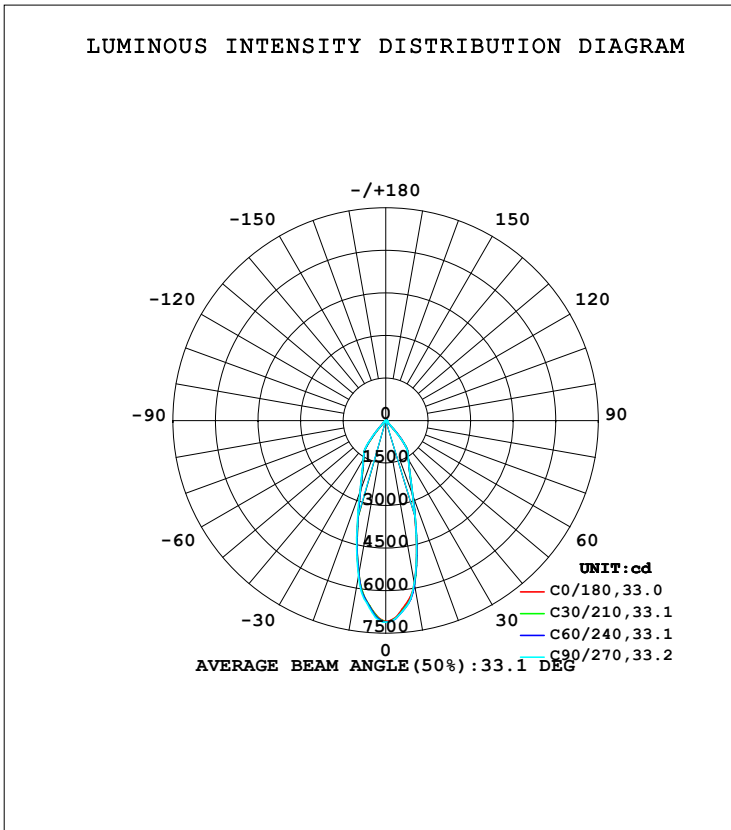

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5820	5855	5817	5649	5491	5501	5575	5680	0- 10	607.6	607.6	16.1,16.1
20	2775	2794	2777	2692	2613	2627	2670	2717	10- 20	1113	1720	45.5,45.5
30	1609	1609	1602	1581	1564	1577	1595	1604	20- 30	928.9	2649	70,70
40	865.1	870.2	836.6	728.8	633.8	657.4	719.6	785.7	30- 40	794.0	3443	91,91
50	75.10	75.75	75.59	74.08	72.43	71.63	71.58	72.85	40- 50	192.1	3635	96.1,96.1
60	44.73	46.26	46.80	45.74	44.43	44.17	44.22	44.40	50- 60	52.65	3688	97.5,97.5
70	21.38	22.24	22.81	23.29	22.97	19.93	17.33	18.28	60- 70	30.97	3719	98.3,98.3
80	15.65	16.31	17.28	19.65	20.34	13.30	6.884	8.800	70- 80	17.68	3736	98.8,98.8
90	1.189	0.7464	1.621	4.824	7.980	8.718	7.992	5.348	80- 90	10.19	3747	99,99
100	1.713	0.9381	1.733	5.270	8.816	9.661	8.919	6.128	90-100	5.558	3752	99.2,99.2
110	2.842	2.118	2.907	6.347	9.783	10.57	9.819	7.109	100-110	6.270	3759	99.3,99.3
120	3.701	3.000	3.775	7.137	10.50	11.26	10.53	7.876	110-120	6.893	3765	99.5,99.5
130	3.895	3.287	3.911	6.694	9.473	10.08	9.457	7.292	120-130	6.392	3772	99.7,99.7
140	3.804	3.442	3.835	5.551	7.262	7.638	7.249	5.908	130-140	4.811	3777	99.8,99.8
150	3.859	3.663	3.871	4.786	5.698	5.894	5.684	4.973	140-150	3.257	3780	99.9,99.9
160	3.490	3.403	3.518	3.987	4.455	4.572	4.475	4.094	150-160	2.072	3782	100,100
170	3.004	2.998	3.009	3.053	3.092	3.080	3.053	3.030	160-170	0.9989	3783	100,100
180	2.907	2.857	2.828	2.830	2.840	2.832	2.830	2.859	170-180	0.2794	3783	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.40V I:0.1640A P:35.600W PF:0.9810 Freq:50.00Hz		
Lamp Flux:3783.22x1 lm		
Name: NS27-35W	Type: LED	
MFR.: Lumega		

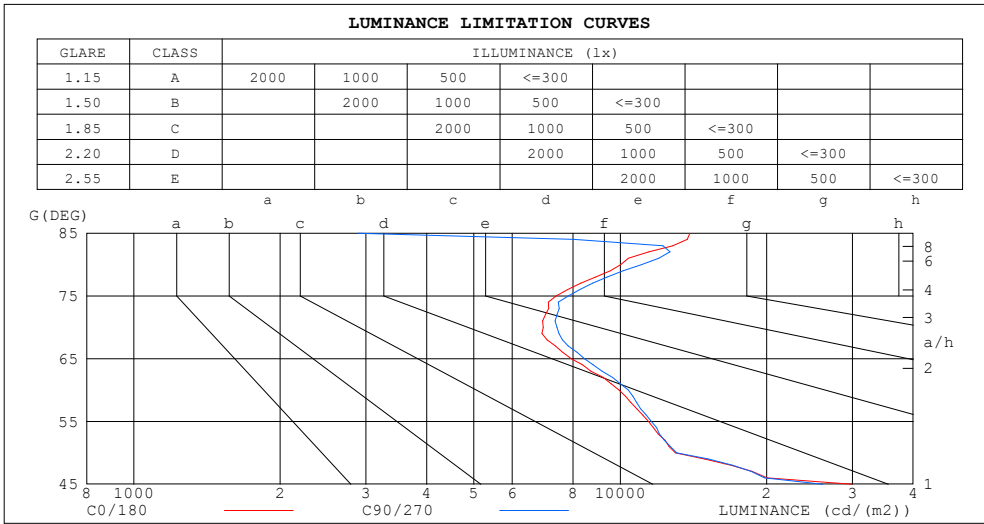

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	13895	2891
80	10017	11055
75	7381	7816
70	6946	7410
65	7931	8440
60	9940	10399
55	11442	11595
50	12981	13067
45	29914	26059


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.40V I:0.1640A P:35.600W PF:0.9810 Freq:50.00Hz		
Lamp Flux:3783.22x1 lm		
Name: NS27-35W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.97	.97	.95	.94	.93
2.0	1.03	.99	.96	1.01	.98	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.86
3.0	.96	.91	.87	.95	.90	.87	.92	.88	.85	.89	.86	.84	.87	.85	.82	.81
4.0	.90	.85	.81	.89	.84	.80	.87	.83	.79	.85	.81	.78	.83	.80	.77	.76
5.0	.85	.79	.75	.84	.79	.75	.82	.77	.74	.80	.76	.73	.79	.75	.72	.71
6.0	.80	.74	.70	.79	.74	.70	.78	.73	.69	.76	.72	.69	.75	.71	.68	.67
7.0	.76	.70	.66	.75	.69	.66	.74	.69	.65	.72	.68	.65	.71	.67	.64	.63
8.0	.72	.66	.62	.71	.66	.62	.70	.65	.61	.69	.64	.61	.68	.64	.61	.59
9.0	.68	.62	.58	.67	.62	.58	.66	.62	.58	.66	.61	.58	.65	.61	.58	.56
10.0	.65	.59	.55	.64	.59	.55	.63	.59	.55	.63	.58	.55	.62	.58	.55	.54

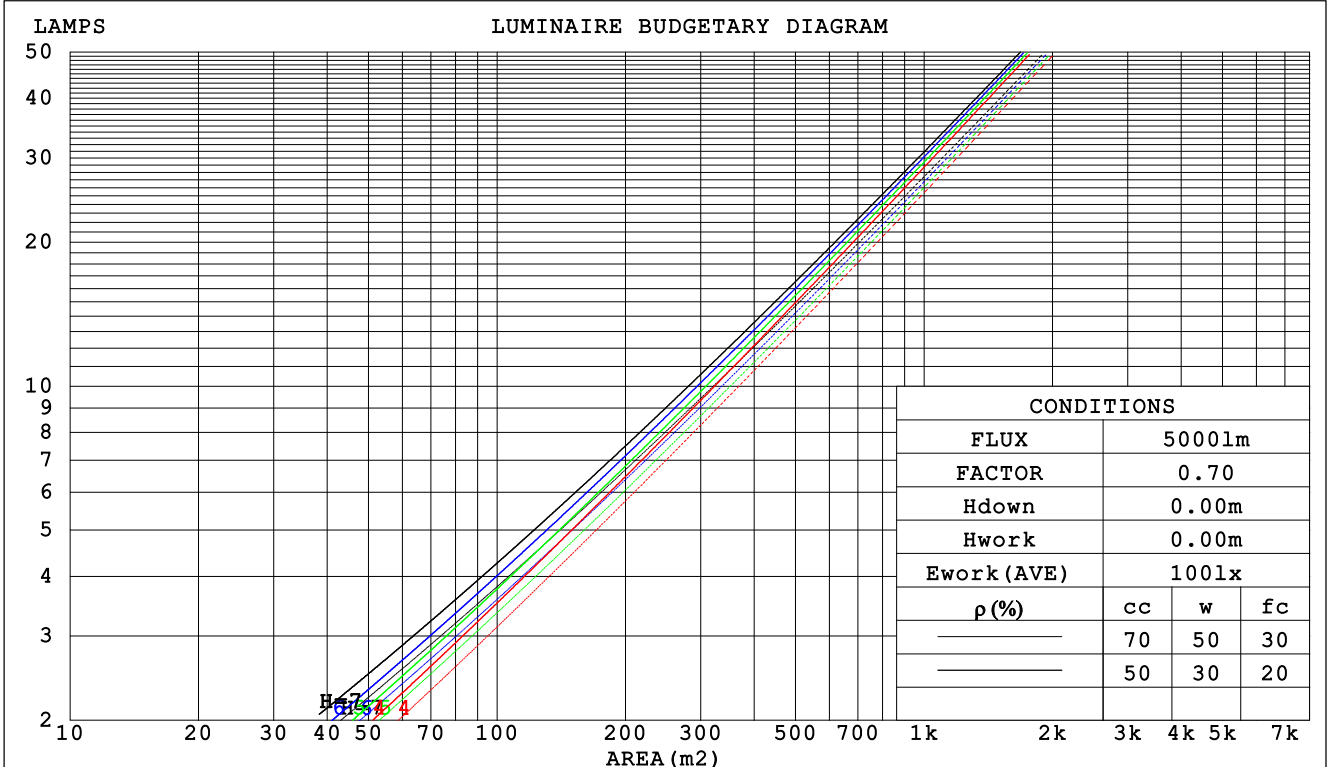

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.40V I:0.1640A P:35.600W PF:0.9810 Freq:50.00Hz		
Lamp Flux:3783.22x1 lm		
Name: NS27-35W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.178	.102	.032	.171	.098	.031	.158	.091	.029	.146	.084	.027	.135	.078	.025	
2.0	.169	.093	.028	.163	.090	.028	.152	.085	.026	.142	.080	.025	.133	.075	.024	
3.0	.160	.085	.026	.155	.083	.025	.146	.079	.024	.137	.075	.023	.129	.071	.022	
4.0	.152	.079	.023	.148	.077	.023	.139	.074	.022	.132	.071	.021	.125	.068	.021	
5.0	.144	.073	.021	.140	.072	.021	.133	.069	.020	.127	.067	.020	.120	.064	.019	
6.0	.137	.069	.020	.134	.068	.019	.128	.065	.019	.122	.063	.019	.116	.061	.018	
7.0	.131	.065	.018	.128	.064	.018	.122	.062	.018	.117	.060	.017	.112	.058	.017	
8.0	.125	.061	.017	.122	.060	.017	.117	.059	.017	.112	.057	.016	.108	.055	.016	
9.0	.119	.058	.016	.117	.057	.016	.112	.056	.016	.108	.054	.016	.104	.053	.015	
10.0	.114	.055	.015	.112	.054	.015	.108	.053	.015	.104	.052	.015	.101	.051	.015	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.179	.165	.152	.153	.141	.131	.105	.097	.091	.060	.056	.053	.019	.018	.017	
2.0	.163	.140	.120	.140	.120	.104	.096	.083	.073	.055	.048	.043	.018	.016	.014	
3.0	.151	.121	.097	.129	.104	.084	.089	.073	.059	.051	.042	.035	.016	.014	.011	
4.0	.140	.106	.080	.120	.092	.070	.083	.064	.049	.048	.038	.029	.015	.012	.010	
5.0	.132	.095	.068	.113	.082	.059	.078	.057	.041	.045	.034	.025	.015	.011	.008	
6.0	.124	.085	.058	.107	.074	.050	.073	.052	.036	.043	.030	.021	.014	.010	.007	
7.0	.117	.078	.050	.101	.067	.044	.070	.047	.031	.041	.028	.018	.013	.009	.006	
8.0	.111	.072	.044	.096	.062	.038	.066	.044	.027	.039	.026	.016	.012	.008	.005	
9.0	.106	.066	.039	.092	.058	.034	.063	.040	.024	.037	.024	.015	.012	.008	.005	
10.0	.102	.062	.035	.088	.054	.031	.061	.038	.022	.035	.022	.013	.011	.007	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.40V I:0.1640A P:35.600W PF:0.9810 Freq:50.00Hz		
Lamp Flux:3783.22x1 lm		
Name: NS27-35W	Type: LED	
MFR.: Lumega		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.0	22.9	22.2	23.1	23.2	21.9	22.8	22.2	23.0	23.2
3H	21.9	22.7	22.1	22.9	23.2	21.8	22.7	22.1	22.9	23.1
4H	21.8	22.6	22.1	22.9	23.1	21.8	22.6	22.1	22.9	23.1
6H	21.8	22.6	22.2	22.8	23.1	21.8	22.6	22.1	22.8	23.1
8H	21.9	22.6	22.2	22.8	23.1	21.9	22.6	22.2	22.9	23.1
12H	21.9	22.6	22.2	22.9	23.2	21.8	22.5	22.2	22.8	23.1
4H 2H	21.8	22.6	22.0	22.8	23.0	21.7	22.5	22.0	22.8	23.0
3H	21.7	22.4	22.0	22.7	23.0	21.7	22.4	22.0	22.6	22.9
4H	21.7	22.3	22.0	22.6	23.0	21.7	22.3	22.0	22.6	22.9
6H	21.7	22.3	22.1	22.6	23.0	21.7	22.3	22.1	22.6	23.0
8H	21.8	22.3	22.2	22.7	23.1	21.8	22.4	22.3	22.7	23.1
12H	21.9	22.4	22.3	22.7	23.2	21.8	22.3	22.3	22.7	23.1
8H 4H	21.6	22.1	22.0	22.5	22.9	21.6	22.1	22.0	22.5	22.8
6H	21.7	22.1	22.2	22.6	23.0	21.7	22.2	22.2	22.6	23.0
8H	21.9	22.2	22.3	22.7	23.1	21.9	22.3	22.4	22.7	23.2
12H	22.0	22.3	22.5	22.8	23.2	21.9	22.2	22.4	22.7	23.2
12H 4H	21.6	22.0	22.0	22.4	22.8	21.5	22.0	22.0	22.4	22.8
6H	21.7	22.1	22.2	22.5	23.0	21.7	22.1	22.2	22.5	23.0
8H	21.9	22.2	22.4	22.6	23.1	21.9	22.2	22.4	22.7	23.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.7 / - 5.8					+ 2.6 / - 5.5				
1.5H	+ 5.2 / - 5.5					+ 5.2 / - 5.2				
2.0H	+ 2.6 / - 0.6					+ 1.9 / - 0.5				

CIE Pub.117, 3783 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.6)
 Area: 0.009 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.40V I:0.1640A P:35.600W PF:0.9810 Freq:50.00Hz		
Lamp Flux:3783.22x1 lm		
Name: NS27-35W	Type: LED	
MFR.: Lumega		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	79	76	85	79	75	85	79	75	72
0.80	93	87	84	93	87	83	91	86	83	79
1.00	98	92	88	97	92	88	95	92	88	84
1.25	102	97	93	101	96	93	99	95	92	87
1.50	105	100	97	104	99	96	101	98	95	90
2.00	108	103	100	106	102	99	103	100	98	92
2.50	109	106	102	108	104	101	105	102	99	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	106	107	105	104	96
5.00	114	112	110	112	110	108	108	107	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.40V I:0.1640A P:35.600W PF:0.9810 Freq:50.00Hz		
Lamp Flux:3783.22x1 lm		
Name: NS27-35W	Type: LED	
MFR.: Lumega		

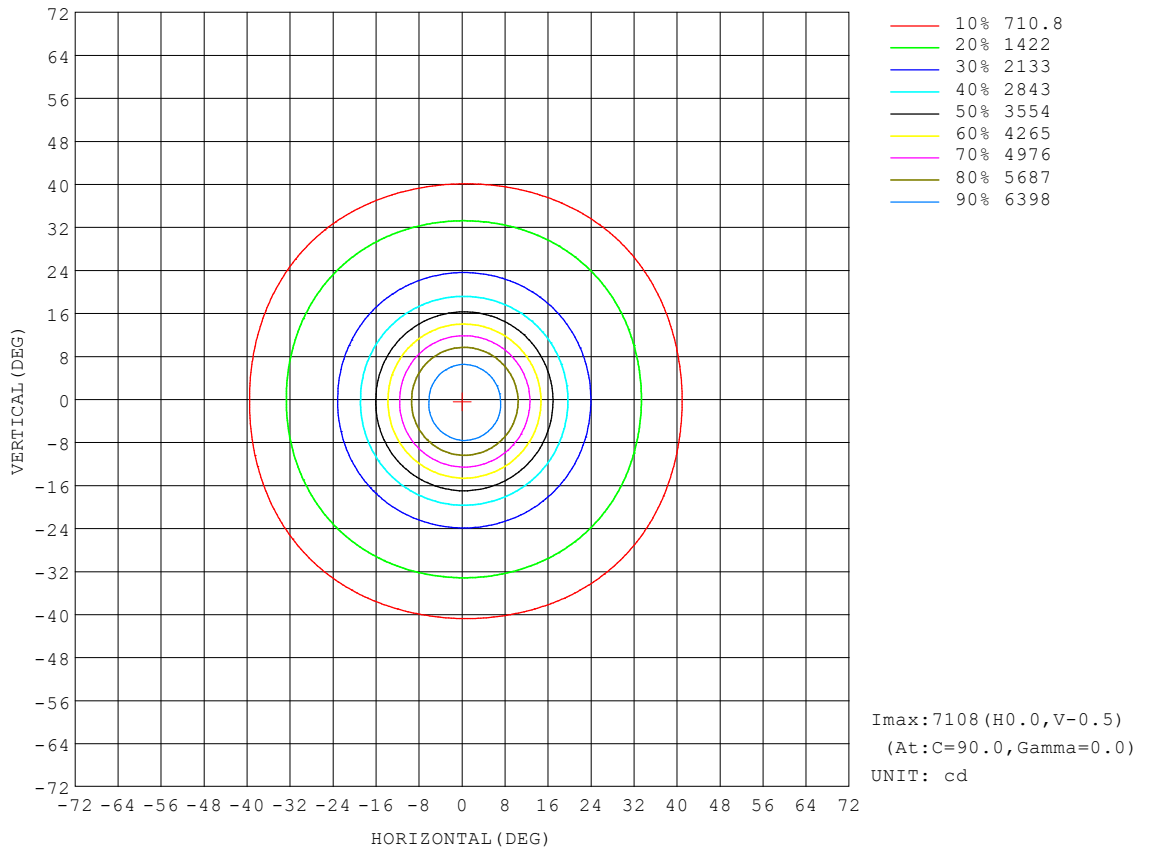


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.40V I:0.1640A P:35.600W PF:0.9810 Freq:50.00Hz		
Lamp Flux:3783.22x1 lm		
Name: NS27-35W	Type: LED	
MFR.: Lumega		

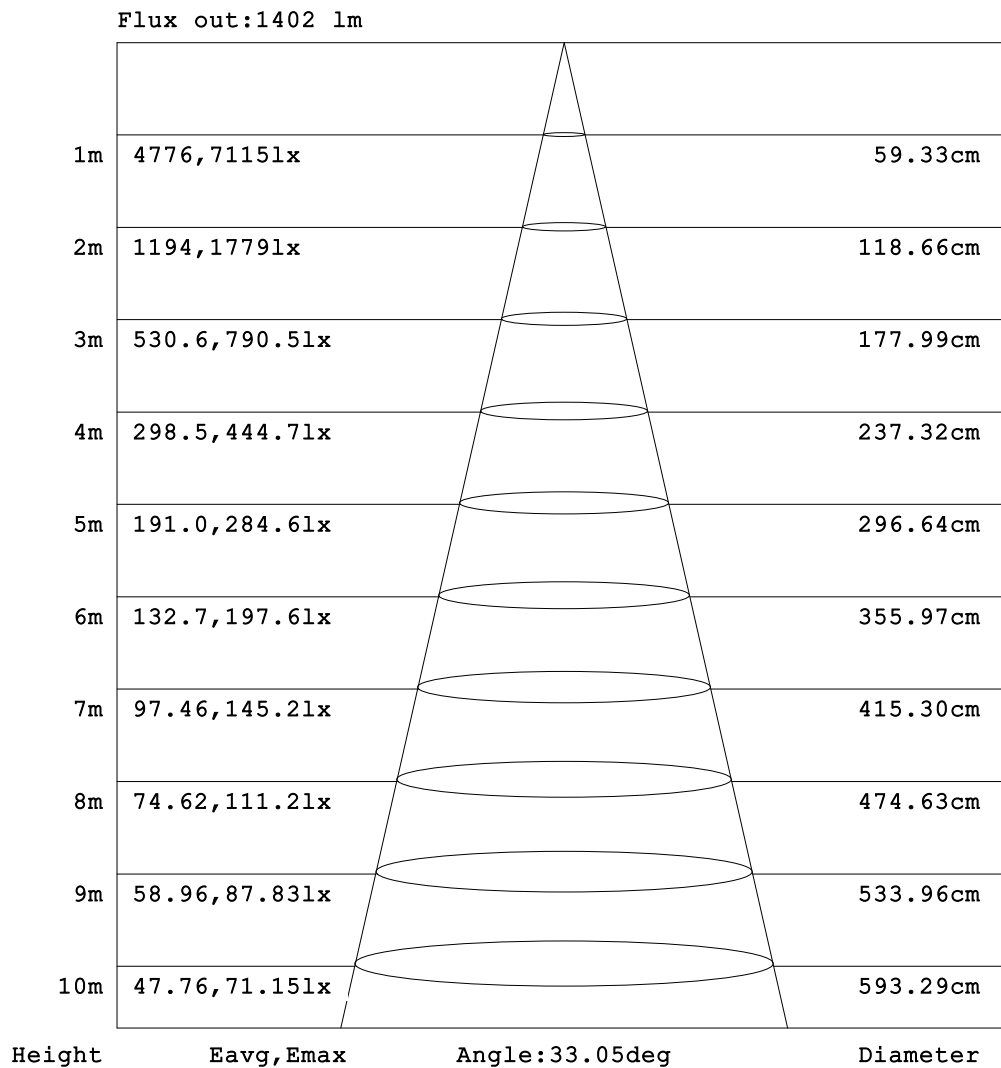


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test: U:220.40V I:0.1640A P:35.600W PF:0.9810 Freq:50.00Hz Lamp Flux:3783.22x1 lm		
Name: NS27-35W	Type: LED	
MFR.: Lumega		

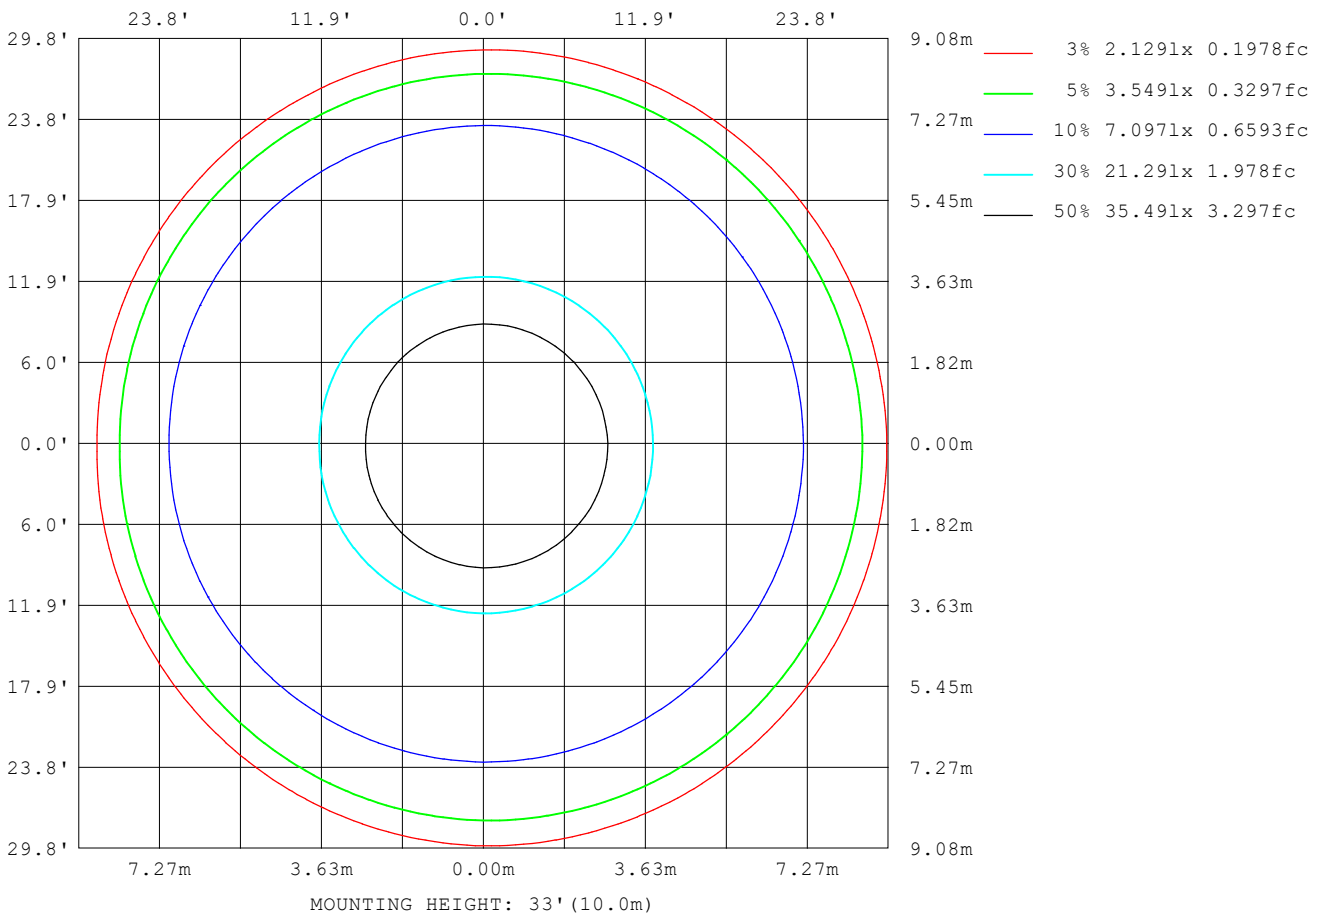

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

Planar Illuminance Curve

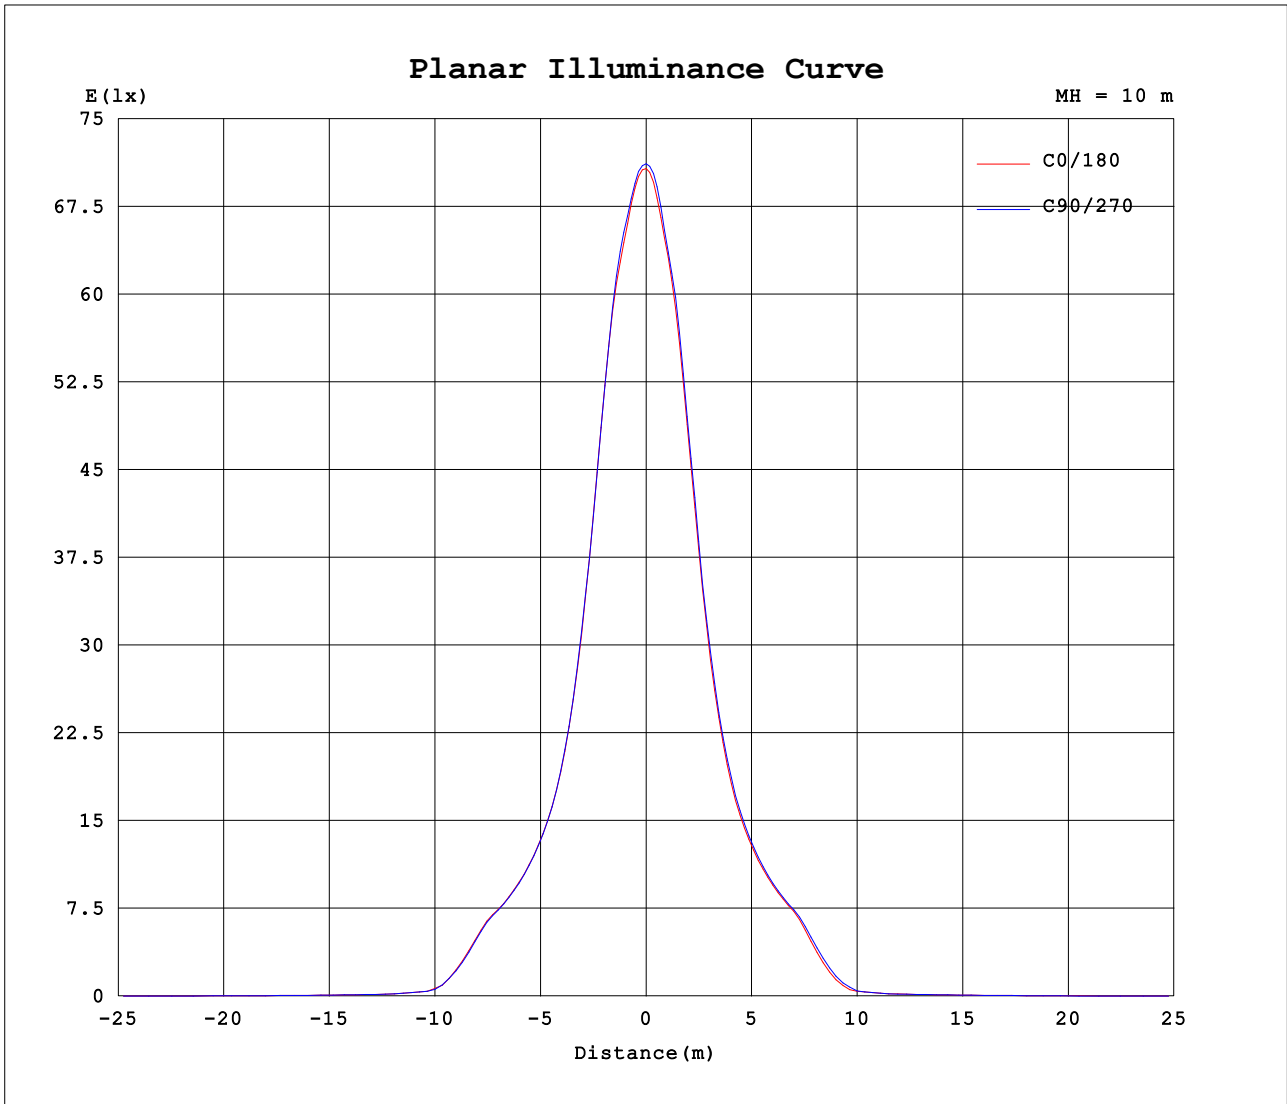

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.40V I:0.1640A P:35.600W PF:0.9810 Freq:50.00Hz		
Lamp Flux:3783.22x1 lm		
Name: NS27-35W	Type: LED	
MFR.: Lumega		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	7075	7097	7110	7115	7102	7087	7075	7087	7102	7115	7110	7097							
5	6679	6731	6754	6748	6688	6619	6559	6566	6592	6626	6645	6663							
10	5820	5855	5854	5817	5708	5590	5491	5486	5517	5575	5639	5720							
15	4163	4193	4191	4157	4060	3953	3862	3847	3865	3911	3972	4056							
20	2775	2794	2795	2777	2721	2662	2613	2616	2637	2670	2700	2735							
25	2017	2023	2022	2012	1984	1955	1933	1942	1959	1980	1993	2006							
30	1609	1610	1608	1602	1588	1574	1564	1571	1582	1595	1602	1606							
35	1350	1349	1346	1342	1333	1325	1320	1327	1336	1345	1349	1351							
40	865	875	865	837	765	692	634	642	673	720	761	810							
45	190	184	176	166	150	134	122	118	120	128	143	164							
50	75.1	75.7	75.8	75.6	74.6	73.5	72.4	71.8	71.5	71.6	72.3	73.4							
55	59.1	59.6	59.8	59.9	59.5	59.0	58.5	58.3	58.2	58.3	58.4	58.7							
60	44.7	45.9	46.6	46.8	46.2	45.3	44.4	44.2	44.1	44.2	44.3	44.5							
65	30.2	31.2	31.8	32.1	31.9	31.4	30.8	30.0	29.2	28.7	28.8	29.3							
70	21.4	22.0	22.5	22.8	23.2	23.3	23.0	21.0	18.9	17.3	17.6	19.0							
75	17.2	17.4	17.7	18.2	19.5	20.3	20.4	16.9	13.2	10.3	10.7	13.0							
80	15.7	16.0	16.6	17.3	19.0	20.3	20.3	15.8	10.8	6.88	7.34	10.3							
85	10.9	5.68	2.80	2.27	6.09	10.7	14.7	13.0	10.2	7.47	7.43	8.57							
90	1.19	0.67	0.82	1.62	3.69	5.96	7.98	8.71	8.72	7.99	6.48	4.21							
95	1.33	0.61	0.65	1.46	3.71	6.22	8.46	9.25	9.25	8.47	6.89	4.51							
100	1.71	0.93	0.94	1.73	4.00	6.54	8.82	9.64	9.68	8.92	7.33	4.93							
105	2.24	1.50	1.51	2.30	4.52	7.00	9.23	10.1	10.1	9.36	7.79	5.42							
110	2.84	2.11	2.13	2.91	5.12	7.58	9.78	10.6	10.6	9.82	8.27	5.95							
115	3.34	2.60	2.63	3.41	5.64	8.11	10.3	11.1	11.1	10.4	8.82	6.47							
120	3.70	2.99	3.01	3.78	5.94	8.34	10.5	11.3	11.3	10.5	9.01	6.74							
125	3.88	3.21	3.23	3.94	5.96	8.20	10.2	10.9	10.9	10.2	8.79	6.68							
130	3.90	3.28	3.29	3.91	5.70	7.69	9.47	10.1	10.1	9.46	8.22	6.37							
135	3.82	3.31	3.31	3.82	5.30	6.95	8.42	8.92	8.90	8.38	7.36	5.84							
140	3.80	3.44	3.45	3.83	4.94	6.16	7.26	7.64	7.64	7.25	6.48	5.33							
145	3.83	3.57	3.58	3.86	4.67	5.56	6.36	6.63	6.63	6.35	5.79	4.95							
150	3.86	3.66	3.66	3.87	4.46	5.11	5.70	5.90	5.89	5.68	5.28	4.67							
155	3.78	3.64	3.64	3.79	4.22	4.69	5.12	5.26	5.26	5.11	4.82	4.37							
160	3.49	3.40	3.41	3.52	3.82	4.15	4.46	4.57	4.58	4.48	4.26	3.93							
165	3.18	3.14	3.14	3.20	3.35	3.52	3.68	3.74	3.74	3.69	3.58	3.41							
170	3.00	3.00	3.00	3.01	3.04	3.07	3.09	3.09	3.07	3.05	3.04	3.02							
175	2.91	2.89	2.87	2.86	2.87	2.88	2.89	2.87	2.85	2.83	2.85	2.87							
180	2.91	2.87	2.84	2.83	2.83	2.83	2.84	2.83	2.83	2.83	2.85	2.87							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: