
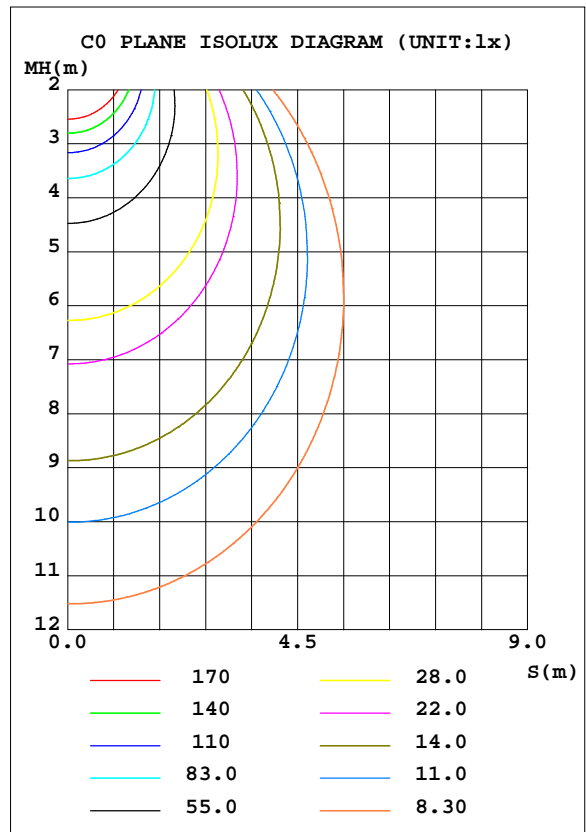


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.80V I:0.1380A P:30.100W PF:0.9790 Freq:50.00Hz		
Lamp Flux:2947.5lx1 lm		
Name: NS41-φ600MM-28W	Type: LED	
MFR.: Lumega Group	DIM.: D600*70mm	
	SUR.: D600mm	

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax(cd)	1101	S/MH(C0/180)	1.22
NOMINAL POWER(W)	28	LOR(%)	100.0	S/MH(C90/270)	1.22
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2947.5	η UP, DN(C0-180)	1.2,49.8
NOMINAL FLUX(lm)	2947.51	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3,47.8
LAMPS INSIDE	1	η up(%)	2.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.6	CIBSE SHR MAX	1.35

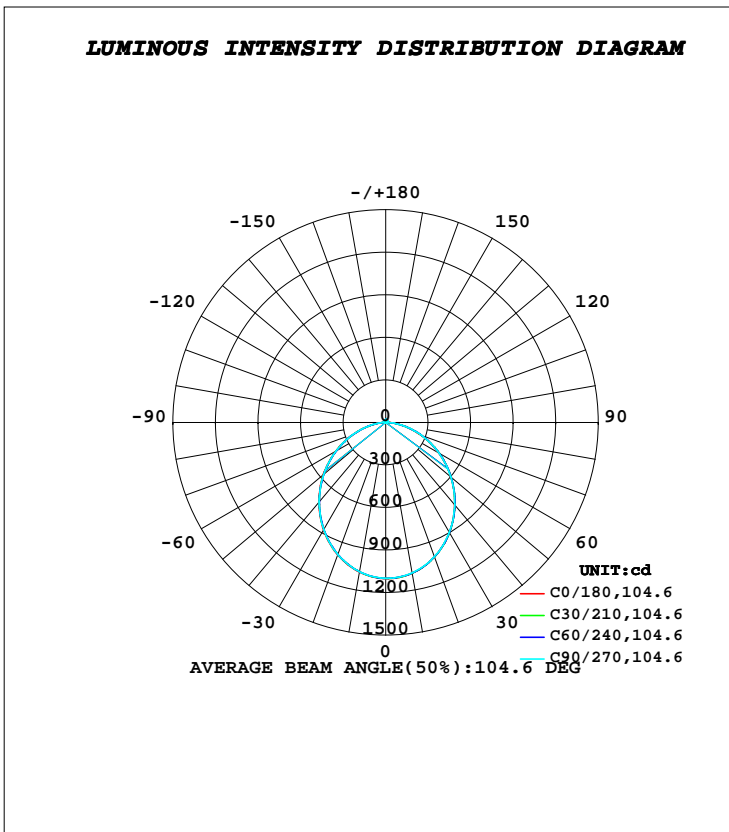

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1080	1079	1078	1075	1072	1069	1068	1072	0- 10	103.7	103.7	3.52,3.52
20	1009	1009	1007	1000	993.3	990.3	990.7	997.5	10- 20	293.8	397.5	13.5,13.5
30	897.6	899.2	896.8	887.4	877.7	873.5	874.0	882.8	20- 30	436.0	833.5	28.3,28.3
40	757.9	760.6	758.0	746.3	734.1	729.7	730.9	741.0	30- 40	511.4	1345	45.6,45.6
50	600.9	603.4	600.8	589.6	577.9	572.2	572.3	582.8	40- 50	514.6	1859	63.1,63.1
60	434.1	437.8	435.2	421.7	407.9	403.8	405.8	416.6	50- 60	450.5	2310	78.4,78.4
70	266.8	271.8	269.9	256.2	242.1	238.9	241.6	251.3	60- 70	333.4	2643	89.7,89.7
80	110.3	116.9	116.6	104.8	91.98	88.30	89.65	97.43	70- 80	186.0	2829	96,96
90	5.736	5.165	5.114	5.941	6.833	6.965	6.789	6.375	80- 90	46.08	2875	97.6,97.6
100	5.982	5.737	5.975	7.060	8.142	8.365	8.111	7.279	90-100	6.947	2882	97.8,97.8
110	7.815	7.601	7.837	8.868	9.886	10.07	9.799	9.018	100-110	8.418	2891	98.1,98.1
120	9.767	9.659	9.930	10.88	11.80	11.98	11.73	10.96	110-120	9.754	2901	98.4,98.4
130	11.90	11.86	12.14	12.98	13.79	13.92	13.68	12.98	120-130	10.63	2911	98.8,98.8
140	14.02	14.02	14.28	15.02	15.70	15.76	15.50	14.90	130-140	10.75	2922	99.1,99.1
150	16.16	16.05	16.22	16.88	17.51	17.48	17.19	16.75	140-150	9.934	2932	99.5,99.5
160	18.35	18.11	18.16	18.72	19.25	19.08	18.74	18.53	150-160	8.179	2940	99.7,99.7
170	20.25	19.92	19.84	20.21	20.55	20.26	19.92	19.98	160-170	5.466	2946	99.9,99.9
180	21.36	20.93	20.76	21.08	21.40	21.07	20.74	20.91	170-180	1.959	2948	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.80V I:0.1380A P:30.100W PF:0.9790 Freq:50.00Hz		
Lamp Flux:2947.51x1 lm		
Name: NS41-φ600MM-28W	Type: LED	
MFR.: Lumega Group	DIM.: D600*70mm	
	SUR.: D600mm	

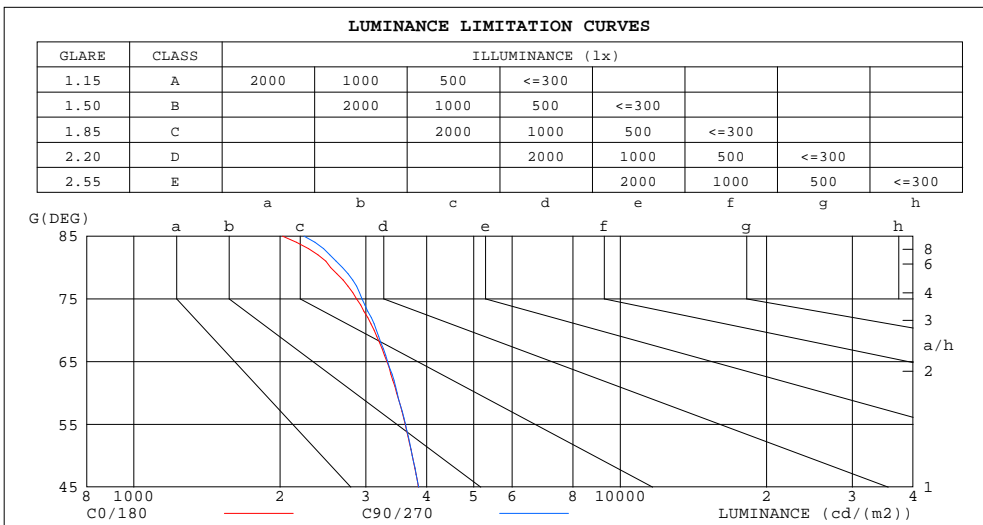

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2022	2240
80	2541	2686
75	2870	2949
70	3120	3156
65	3314	3325
60	3473	3481
55	3614	3619
50	3739	3739
45	3844	3852


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.80V I:0.1380A P:30.100W PF:0.9790 Freq:50.00Hz		
Lamp Flux:2947.51x1 lm		
Name: NS41-φ600MM-28W	Type: LED	
MFR.: Lumega Group	DIM.: D600*70mm	
	SUR.: D600mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.92	.90	.87	.88	.86	.84	.82
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.80	.72	.65	.78	.71	.65	.75	.68	.63	.72	.66	.62	.69	.64	.61	.58
4.0	.71	.62	.56	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.55	.48	.62	.54	.48	.60	.53	.47	.58	.51	.46	.55	.50	.46	.43
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.52	.46	.41	.50	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.47	.39	.33	.45	.38	.33	.44	.37	.32	.42	.36	.32	.30
9.0	.44	.35	.30	.43	.35	.30	.42	.34	.30	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.40	.32	.27	.38	.32	.27	.37	.31	.27	.36	.31	.26	.25

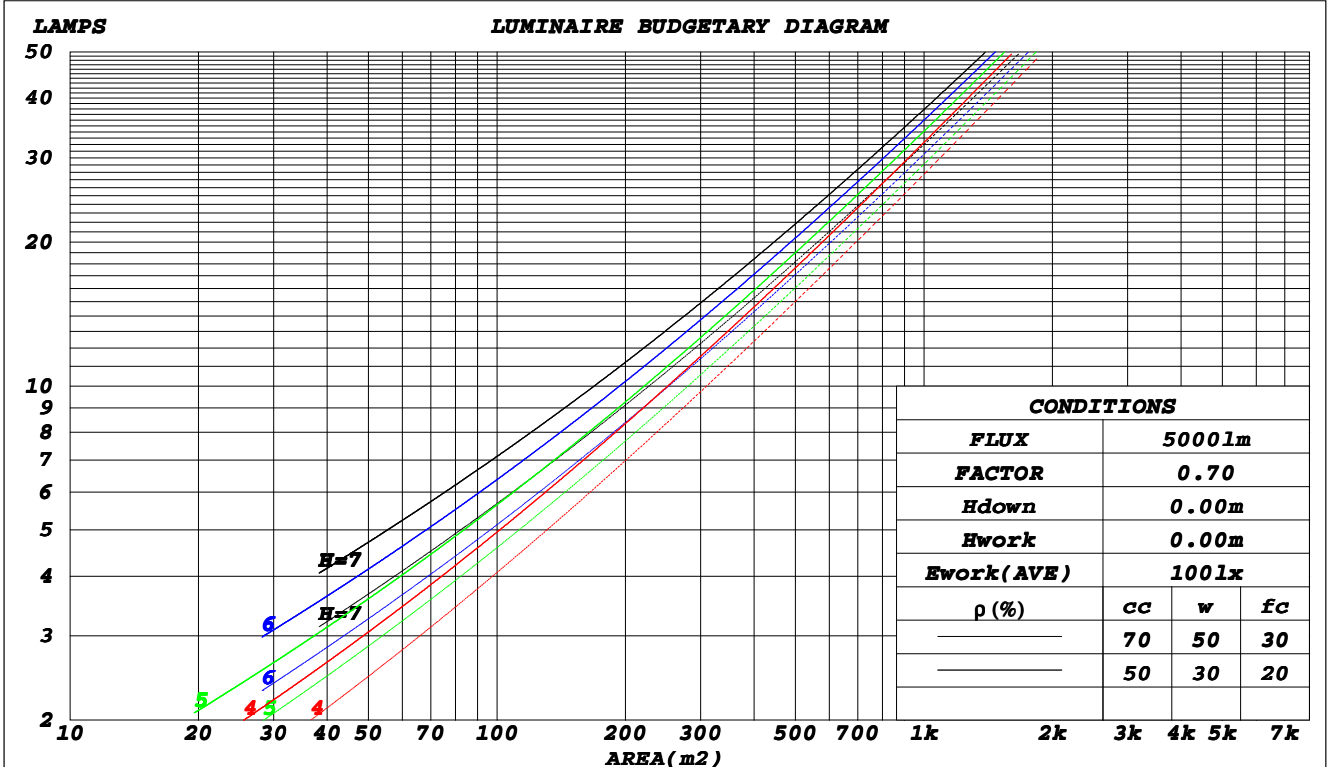

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-04

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.80V I:0.1380A P:30.100W PF:0.9790 Freq:50.00Hz		
Lamp Flux:2947.51x1 lm		
Name: NS41-φ600MM-28W	Type: LED	
MFR.: Lumega Group	DIM.: D600*70mm	
	SUR.: D600mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.300	.170	.054	.292	.166	.053	.277	.159	.051	.264	.152	.049	.252	.146	.047	
2.0	.283	.155	.048	.276	.152	.047	.263	.147	.046	.252	.141	.044	.241	.136	.043	
3.0	.263	.140	.042	.257	.138	.041	.245	.133	.040	.235	.129	.039	.225	.125	.039	
4.0	.243	.126	.037	.238	.124	.037	.228	.121	.036	.218	.117	.035	.209	.114	.035	
5.0	.225	.115	.033	.221	.113	.033	.211	.110	.032	.203	.107	.032	.195	.104	.031	
6.0	.209	.105	.030	.205	.104	.030	.197	.101	.029	.189	.098	.029	.182	.096	.028	
7.0	.195	.096	.027	.191	.095	.027	.184	.093	.027	.177	.091	.026	.171	.089	.026	
8.0	.182	.089	.025	.179	.088	.025	.172	.086	.025	.166	.084	.024	.160	.082	.024	
9.0	.171	.083	.023	.168	.082	.023	.162	.080	.023	.156	.078	.022	.151	.077	.022	
10.0	.161	.077	.021	.158	.076	.021	.153	.075	.021	.148	.073	.021	.143	.072	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.198	.175	.154	.170	.150	.132	.116	.103	.092	.067	.060	.053	.021	.019	.017	
2.0	.190	.151	.118	.163	.130	.102	.112	.090	.071	.064	.052	.042	.021	.017	.014	
3.0	.182	.133	.094	.156	.115	.082	.107	.080	.057	.062	.047	.034	.020	.015	.011	
4.0	.174	.120	.078	.150	.104	.068	.103	.072	.048	.060	.042	.028	.019	.014	.009	
5.0	.167	.110	.067	.143	.095	.058	.099	.066	.041	.057	.039	.024	.018	.013	.008	
6.0	.160	.101	.059	.138	.088	.051	.095	.061	.036	.055	.036	.022	.018	.012	.007	
7.0	.153	.094	.053	.132	.082	.046	.091	.057	.033	.053	.034	.019	.017	.011	.006	
8.0	.147	.089	.048	.126	.077	.042	.088	.054	.030	.051	.032	.018	.016	.010	.006	
9.0	.141	.084	.045	.121	.073	.039	.084	.051	.028	.049	.030	.017	.016	.010	.005	
10.0	.135	.079	.042	.117	.069	.037	.081	.048	.026	.047	.029	.016	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.80V I:0.1380A P:30.100W PF:0.9790 Freq:50.00Hz		
Lamp Flux:2947.51x1 lm		
Name: NS41-φ600MM-28W	Type: LED	
MFR.: Lumega Group	DIM.: D600*70mm	
	SUR.: D600mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.2	18.7	17.5	18.9	19.2	17.2	18.7	17.5	18.9	19.2
3H	18.7	20.0	19.0	20.3	20.6	18.7	20.0	19.0	20.3	20.6
4H	19.3	20.5	19.6	20.8	21.1	19.3	20.6	19.6	20.9	21.2
6H	19.7	20.9	20.0	21.2	21.5	19.7	20.9	20.1	21.2	21.6
8H	19.8	20.9	20.2	21.3	21.6	19.9	21.0	20.2	21.4	21.7
12H	19.8	21.0	20.2	21.3	21.6	19.9	21.1	20.3	21.4	21.8
4H 2H	17.8	19.1	18.2	19.4	19.7	17.8	19.1	18.2	19.4	19.7
3H	19.5	20.6	19.8	20.9	21.3	19.5	20.6	19.9	20.9	21.3
4H	20.2	21.2	20.6	21.5	21.9	20.2	21.2	20.6	21.6	22.0
6H	20.7	21.6	21.1	22.0	22.4	20.8	21.7	21.2	22.1	22.5
8H	20.9	21.7	21.3	22.1	22.6	21.0	21.8	21.4	22.2	22.6
12H	21.0	21.7	21.4	22.2	22.6	21.1	21.9	21.5	22.3	22.7
8H 4H	20.4	21.3	20.9	21.7	22.1	20.5	21.3	20.9	21.7	22.1
6H	21.1	21.8	21.6	22.3	22.7	21.2	21.9	21.7	22.3	22.8
8H	21.4	22.0	21.9	22.5	23.0	21.5	22.1	22.0	22.5	23.0
12H	21.5	22.1	22.1	22.6	23.1	21.7	22.2	22.2	22.7	23.2
12H 4H	20.4	21.2	20.9	21.6	22.1	20.5	21.2	20.9	21.7	22.1
6H	21.2	21.8	21.7	22.3	22.8	21.2	21.9	21.7	22.3	22.8
8H	21.5	22.0	22.0	22.5	23.0	21.6	22.1	22.1	22.6	23.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2948 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.8)
 Area: 0.25 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.80V I:0.1380A P:30.100W PF:0.9790 Freq:50.00Hz Lamp Flux:2947.51x1 lm		
Name: NS41-φ600MM-28W	Type: LED	
MFR.: Lumega Group	DIM.: D600*70mm	
	SUR.: D600mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	47	40	57	46	40	56	46	39	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	66	79	71	65	57
1.50	88	79	72	86	78	71	83	76	70	62
2.00	95	87	80	93	85	79	89	83	78	69
2.50	99	91	85	97	90	84	92	87	82	73
3.00	102	95	90	100	94	89	95	90	86	77
4.00	106	100	96	103	98	94	99	95	91	82
5.00	108	104	100	106	101	98	101	97	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.80V I:0.1380A P:30.100W PF:0.9790 Freq:50.00Hz		
Lamp Flux:2947.51x1 l m		
Name: NS41-φ600MM-28W	Type: LED	
MFR.: Lumega Group	DIM.: D600*70mm	
	SUR.: D600mm	

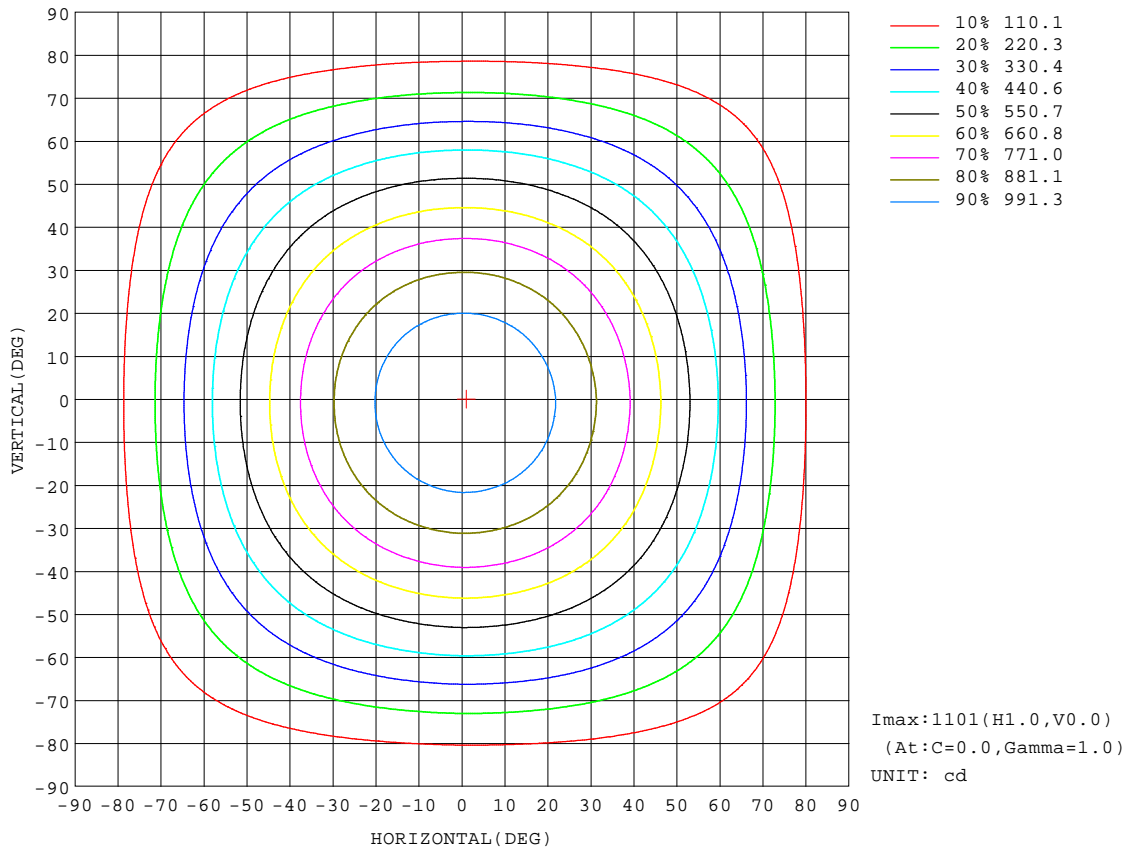


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.80V I:0.1380A P:30.100W PF:0.9790 Freq:50.00Hz		
Lamp Flux:2947.51x1 lm		
Name: NS41-φ600MM-28W	Type: LED	
MFR.: Lumega Group	DIM.: D600*70mm	
	SUR.: D600mm	

Flux out:2004 lm

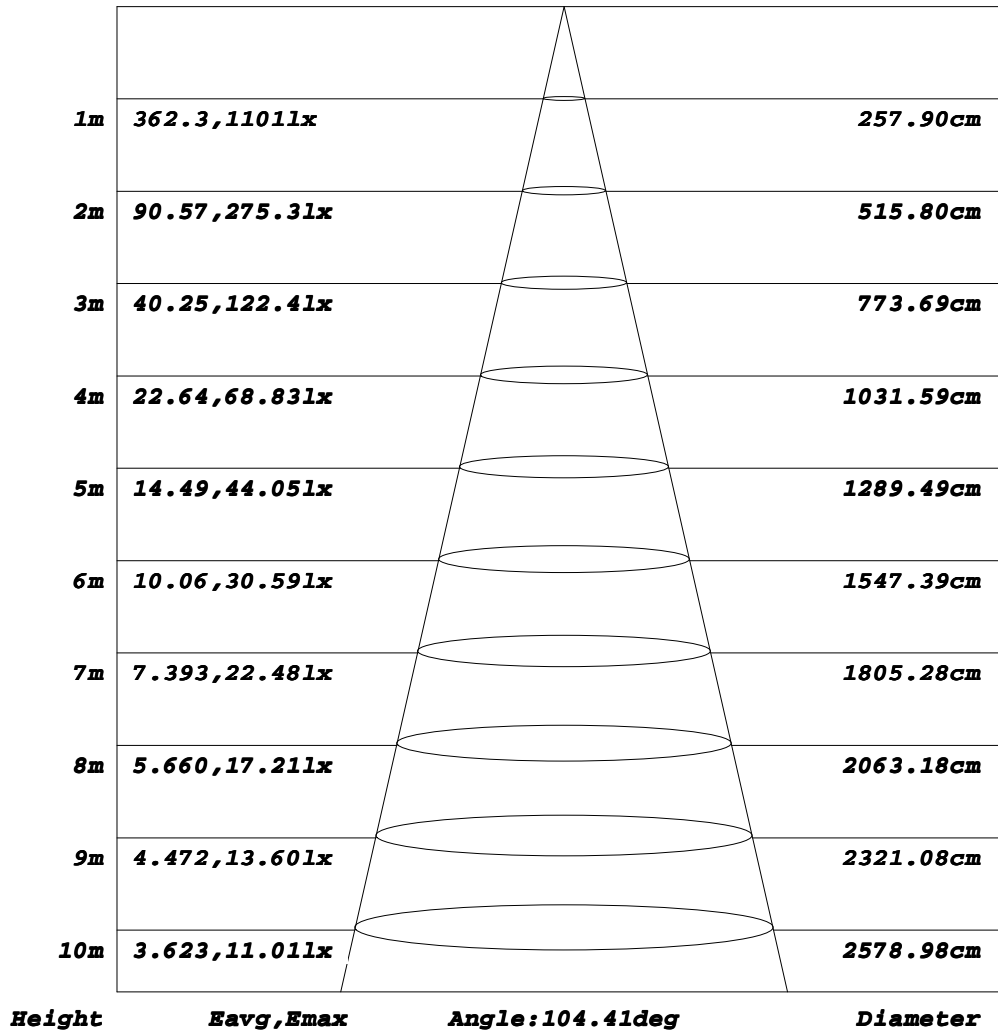


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.80V I:0.1380A P:30.100W PF:0.9790 Freq:50.00Hz		
Lamp Flux:2947.51x1 lm		
Name: NS41-φ600MM-28W	Type: LED	
MFR.: Lumega Group	DIM.: D600*70mm	
	SUR.: D600mm	

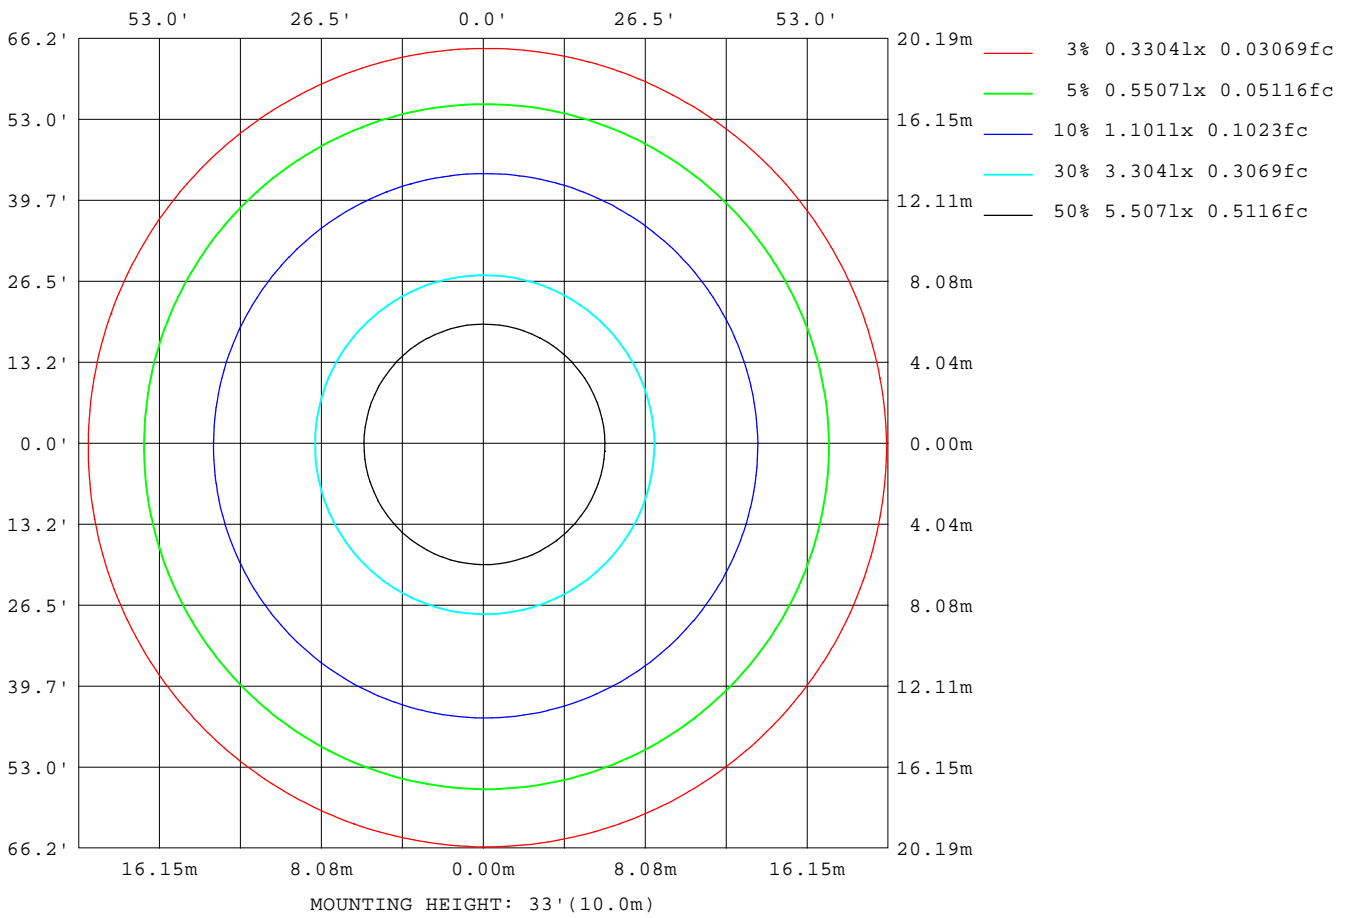

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

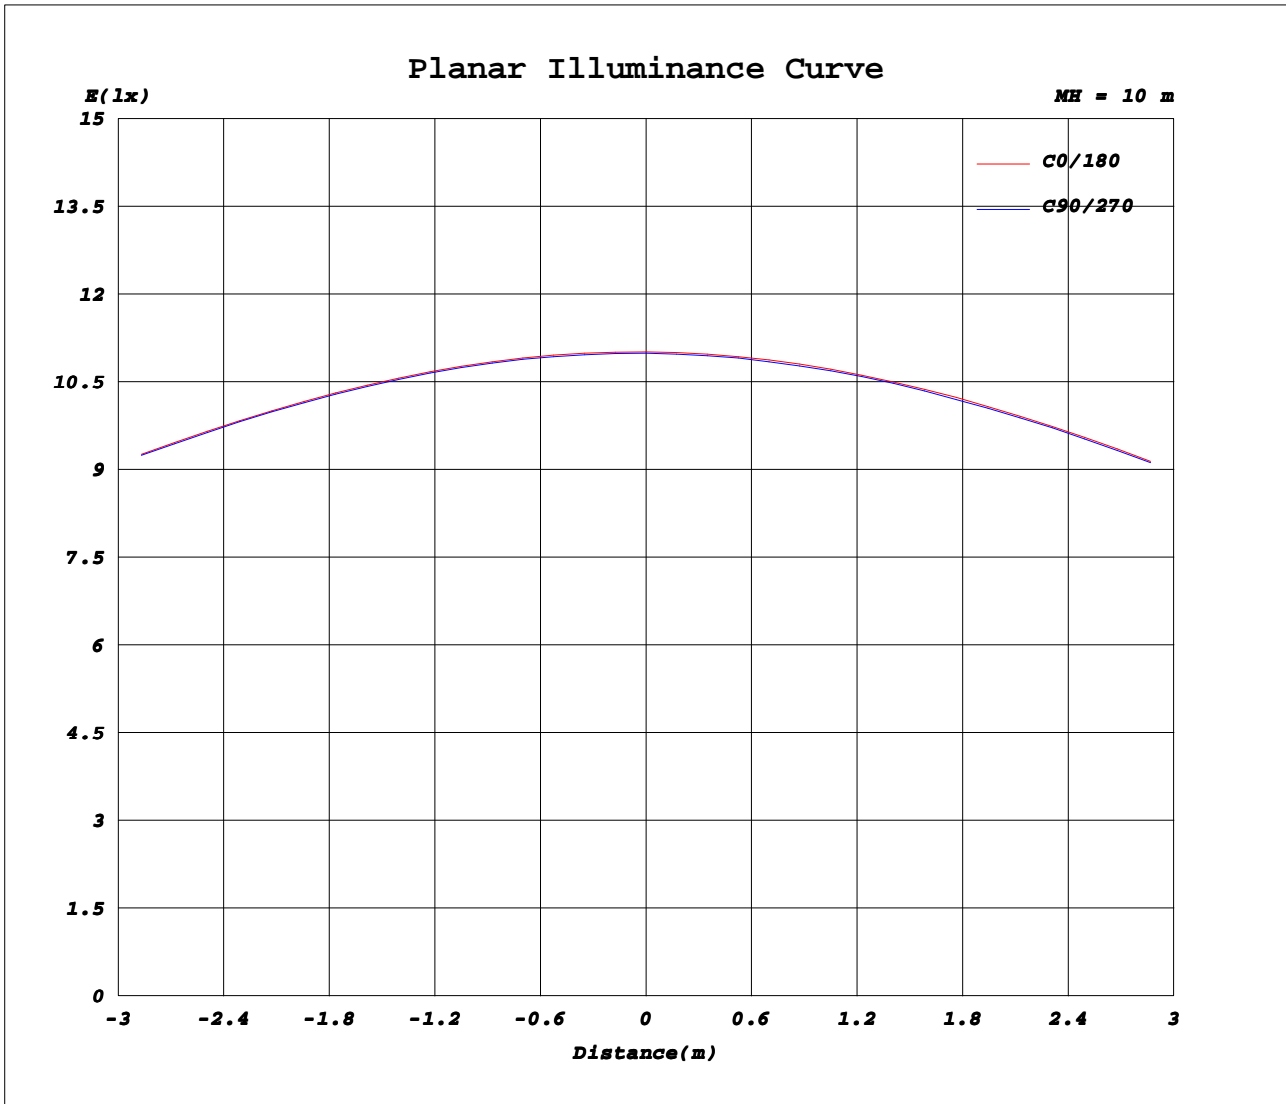

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.80V I:0.1380A P:30.100W PF:0.9790 Freq:50.00Hz		
Lamp Flux:2947.51x1 lm		
Name: NS41-φ600MM-28W	Type: LED	
MFR.: Lumega Group	DIM.: D600*70mm	
	SUR.: D600mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1101	1100	1099	1099	1100	1101	1101	1101	1100	1099	1099	1100							
5	1097	1096	1095	1095	1094	1094	1093	1091	1090	1090	1091	1093							
10	1080	1079	1079	1078	1076	1074	1072	1069	1068	1068	1070	1074							
15	1050	1050	1049	1048	1045	1041	1038	1035	1034	1035	1038	1043							
20	1009	1009	1009	1007	1002	998	993	991	990	991	994	1001							
25	957	959	958	956	950	945	939	936	935	936	941	948							
30	898	899	899	897	891	884	878	874	873	874	879	887							
35	831	833	833	831	824	816	808	805	803	805	810	819							
40	758	761	761	758	751	742	734	730	729	731	737	746							
45	680	683	683	681	673	664	656	652	651	653	658	667							
50	601	603	603	601	594	586	578	573	571	572	578	588							
55	518	522	522	519	510	501	492	488	487	490	496	505							
60	434	438	438	435	427	417	408	404	403	406	412	421							
65	350	354	354	351	343	333	324	321	321	323	329	338							
70	267	271	272	270	261	251	242	239	239	242	247	256							
75	186	191	193	191	183	174	165	161	160	162	167	175							
80	110	116	118	117	109	100	92.0	88.7	87.9	89.7	94.0	101							
85	44.1	48.4	50.0	48.8	42.8	35.5	28.6	25.5	24.4	25.6	29.3	35.5							
90	5.74	5.27	5.06	5.11	5.63	6.25	6.83	6.98	6.95	6.79	6.55	6.20							
95	5.17	4.93	4.93	5.18	5.88	6.66	7.36	7.61	7.63	7.39	6.90	6.16							
100	5.98	5.74	5.74	5.98	6.67	7.45	8.14	8.37	8.36	8.11	7.63	6.92							
105	6.88	6.64	6.63	6.87	7.56	8.32	9.01	9.21	9.19	8.93	8.46	7.78							
110	7.82	7.60	7.60	7.84	8.50	9.23	9.89	10.1	10.1	9.80	9.35	8.69							
115	8.76	8.58	8.61	8.85	9.49	10.2	10.8	11.0	11.0	10.7	10.3	9.63							
120	9.77	9.63	9.69	9.93	10.5	11.2	11.8	12.0	12.0	11.7	11.3	10.6							
125	10.8	10.7	10.8	11.0	11.6	12.2	12.8	13.0	12.9	12.7	12.3	11.6							
130	11.9	11.8	11.9	12.1	12.7	13.3	13.8	13.9	13.9	13.7	13.3	12.7							
135	12.9	12.9	13.0	13.2	13.7	14.3	14.7	14.9	14.8	14.6	14.2	13.7							
140	14.0	14.0	14.1	14.3	14.8	15.3	15.7	15.8	15.7	15.5	15.2	14.7							
145	15.1	15.0	15.1	15.3	15.7	16.2	16.6	16.7	16.6	16.4	16.0	15.6							
150	16.2	16.0	16.1	16.2	16.7	17.1	17.5	17.5	17.4	17.2	16.9	16.6							
155	17.3	17.2	17.1	17.3	17.6	18.1	18.4	18.4	18.2	18.0	17.8	17.6							
160	18.3	18.1	18.1	18.2	18.5	18.9	19.3	19.2	19.0	18.7	18.6	18.5							
165	19.3	19.1	19.0	19.0	19.3	19.6	19.9	19.8	19.5	19.3	19.2	19.2							
170	20.2	20.0	19.8	19.8	20.1	20.3	20.6	20.4	20.1	19.9	19.9	20.0							
175	21.1	20.8	20.6	20.5	20.7	20.9	21.1	20.9	20.6	20.4	20.5	20.7							
180	21.4	21.0	20.8	20.8	21.0	21.2	21.4	21.2	20.9	20.7	20.8	21.0							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-04

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: