
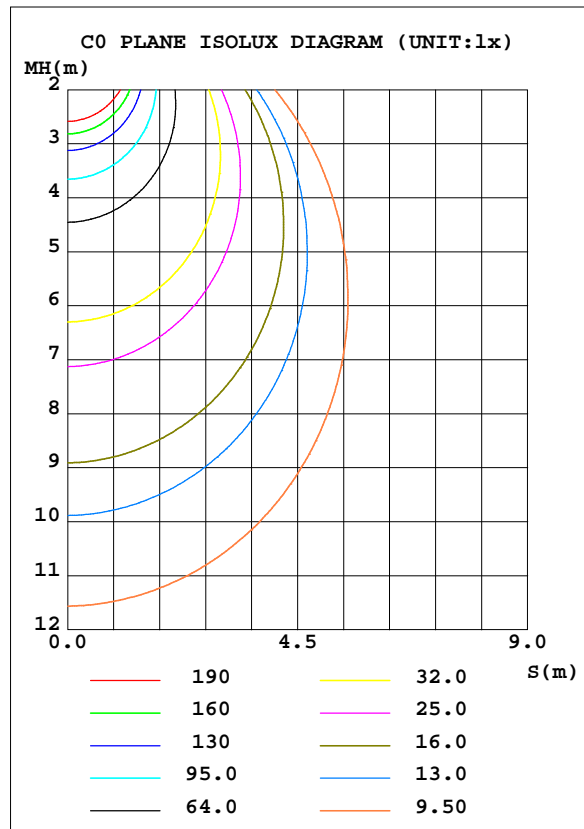


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.50V I:0.1390A P:30.300W PF:0.9830 Freq:50.00Hz		
Lamp Flux:3687.34x1 lm		
Name: NS42-φ400-30W	Type: LED	
MFR.: Lumega Group	DIM.: D400*H40mm	
	SUR.: D340mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 121.69 lm/W			
MODEL		I _{max} (cd)	1271	S/MH(C0/180)	1.23
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3687.3	η UP, DN(C0-180)	1.2, 48.5
NOMINAL FLUX(lm)	3687.34	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3, 49.0
LAMPS INSIDE	1	η up(%)	2.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.5	CIBSE SHR MAX	1.35

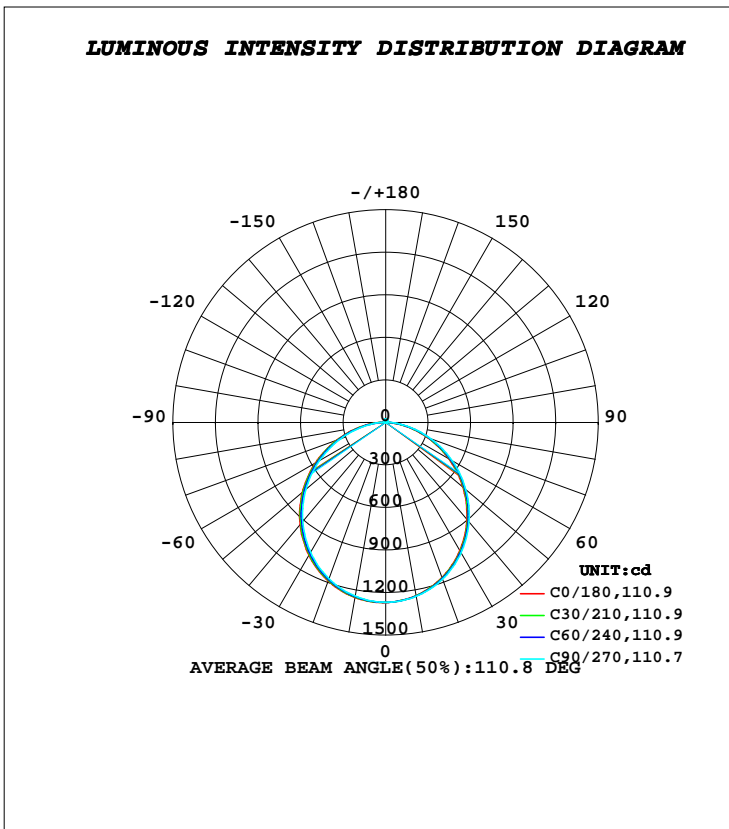

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1240	1242	1245	1250	1253	1249	1243	1241	0- 10	120.0	120.0	3.25,3.25
20	1164	1169	1175	1183	1189	1182	1173	1167	10- 20	343.1	463.1	12.6,12.6
30	1045	1054	1063	1075	1082	1073	1060	1052	20- 30	517.9	981.0	26.6,26.6
40	892.6	903.7	914.9	929.0	937.6	926.7	911.2	901.0	30- 40	621.0	1602	43.4,43.4
50	713.8	725.4	738.3	756.5	768.4	754.9	735.6	723.5	40- 50	640.0	2242	60.8,60.8
60	515.8	528.8	542.6	561.0	572.7	559.1	539.5	526.6	50- 60	574.8	2817	76.4,76.4
70	314.0	326.8	340.1	357.7	368.9	356.5	338.2	325.3	60- 70	437.5	3254	88.3,88.3
80	127.1	139.0	151.2	166.8	176.7	165.7	149.5	137.8	70- 80	257.7	3512	95.2,95.2
90	6.741	6.494	9.085	17.57	24.20	18.10	9.953	7.120	80- 90	81.77	3594	97.5,97.5
100	8.875	8.413	8.524	9.601	10.75	11.14	11.05	10.24	90-100	9.973	3604	97.7,97.7
110	11.24	10.80	10.90	11.88	12.94	13.31	13.24	12.50	100-110	11.59	3615	98,98
120	13.59	13.20	13.29	14.18	15.14	15.52	15.48	14.78	110-120	13.14	3628	98.4,98.4
130	15.92	15.57	15.65	16.44	17.30	17.66	17.65	17.02	120-130	13.92	3642	98.8,98.8
140	18.07	17.81	17.90	18.57	19.30	19.62	19.61	19.05	130-140	13.70	3656	99.2,99.2
150	20.20	19.96	20.01	20.54	21.11	21.32	21.29	20.89	140-150	12.36	3668	99.5,99.5
160	22.42	22.20	22.18	22.49	22.82	22.87	22.81	22.66	150-160	9.979	3678	99.8,99.8
170	24.22	23.92	23.83	24.08	24.34	24.19	24.02	24.06	160-170	6.606	3685	99.9,99.9
180	24.49	24.24	24.15	24.34	24.53	24.33	24.13	24.22	170-180	2.313	3687	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.50V I:0.1390A P:30.300W PF:0.9830 Freq:50.00Hz		
Lamp Flux:3687.34x1 lm		
Name: NS42-φ400-30W	Type: LED	
MFR.: Lumega Group	DIM.: D400*H40mm	
	SUR.: D340mm	

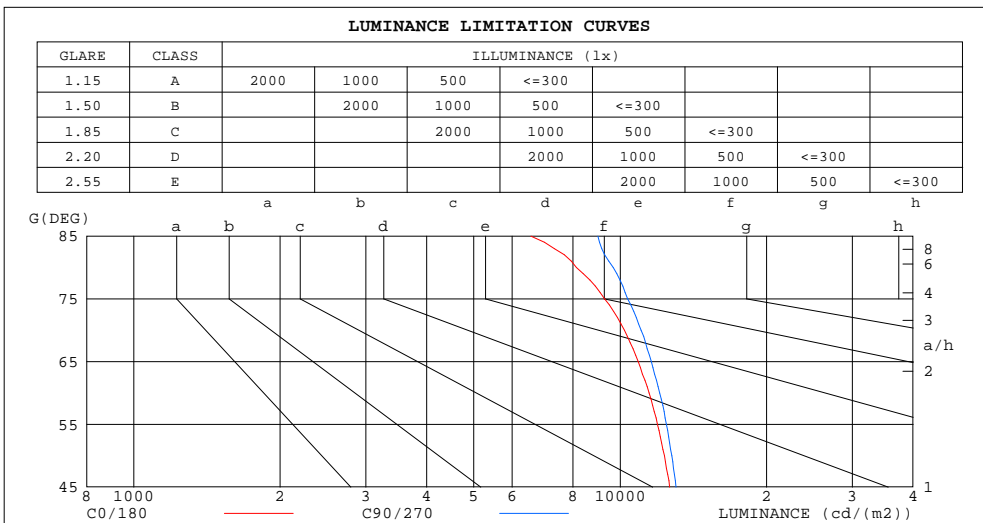

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	6561	8993
80	8136	9676
75	9284	10367
70	10202	11050
65	10896	11594
60	11462	12058
55	11932	12445
50	12338	12762
45	12644	13034


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.50V I:0.1390A P:30.300W PF:0.9830 Freq:50.00Hz		
Lamp Flux:3687.34x1 lm		
Name: NS42-φ400-30W	Type: LED	
MFR.: Lumega Group	DIM.: D400*H40mm	
	SUR.: D340mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.86	.88	.85	.83	.81
2.0	.90	.83	.77	.88	.81	.76	.84	.78	.74	.80	.76	.72	.77	.73	.70	.67
3.0	.79	.71	.64	.77	.69	.63	.74	.67	.62	.71	.65	.60	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.54	.65	.58	.53	.63	.57	.52	.60	.55	.51	.48
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.45	.56	.50	.45	.54	.49	.44	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.41	.35	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.36	.30	.25	.35	.29	.25	.23

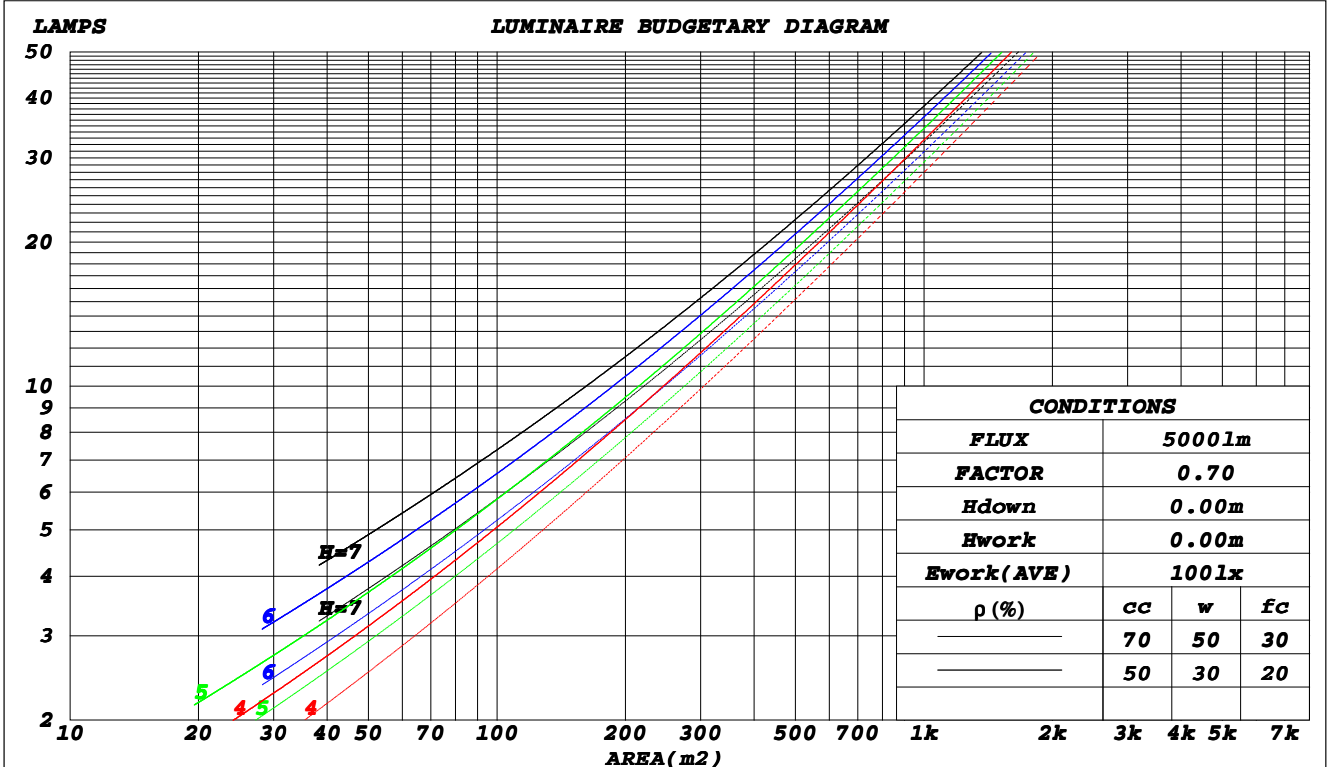

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-04-27

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.50V I:0.1390A P:30.300W PF:0.9830 Freq:50.00Hz		
Lamp Flux:3687.34x1 lm		
Name: NS42-φ400-30W	Type: LED	
MFR.: Lumega Group	DIM.: D400*H40mm	
	SUR.: D340mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.313	.178	.056	.305	.174	.055	.290	.166	.053	.276	.159	.051	.264	.153	.049	
2.0	.292	.160	.049	.285	.157	.048	.272	.151	.047	.260	.146	.046	.249	.141	.044	
3.0	.270	.144	.043	.264	.141	.043	.252	.137	.042	.241	.132	.041	.231	.128	.040	
4.0	.249	.129	.038	.243	.127	.038	.233	.124	.037	.223	.120	.036	.214	.116	.035	
5.0	.230	.117	.034	.225	.115	.034	.216	.112	.033	.207	.109	.032	.199	.106	.032	
6.0	.213	.107	.031	.209	.105	.030	.200	.103	.030	.193	.100	.029	.185	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.094	.027	.180	.092	.027	.173	.090	.026	
8.0	.185	.090	.025	.181	.089	.025	.175	.087	.025	.169	.085	.025	.163	.083	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.149	.074	.021	.145	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.210	.210	.210	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.200	.176	.154	.171	.151	.132	.117	.104	.091	.067	.060	.053	.022	.019	.017	
2.0	.192	.152	.118	.164	.130	.102	.113	.090	.071	.065	.052	.042	.021	.017	.014	
3.0	.184	.134	.094	.158	.116	.082	.108	.080	.057	.063	.047	.034	.020	.015	.011	
4.0	.177	.121	.078	.151	.104	.068	.104	.073	.048	.060	.043	.028	.019	.014	.009	
5.0	.169	.110	.067	.145	.096	.058	.100	.067	.041	.058	.039	.024	.019	.013	.008	
6.0	.162	.102	.059	.139	.088	.052	.096	.062	.036	.056	.036	.022	.018	.012	.007	
7.0	.155	.095	.053	.133	.083	.046	.092	.058	.033	.054	.034	.020	.017	.011	.006	
8.0	.149	.089	.049	.128	.078	.043	.089	.055	.030	.052	.032	.018	.017	.011	.006	
9.0	.143	.085	.045	.123	.073	.040	.085	.052	.028	.050	.030	.017	.016	.010	.006	
10.0	.137	.080	.043	.118	.070	.037	.082	.049	.026	.048	.029	.016	.015	.010	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.50V I:0.1390A P:30.300W PF:0.9830 Freq:50.00Hz		
Lamp Flux:3687.34x1 lm		
Name: NS42-φ400-30W	Type: LED	
MFR.: Lumega Group	DIM.: D400*H40mm	
	SUR.: D340mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.2	22.7	21.5	22.9	23.2	21.4	22.9	21.7	23.1	23.4
3H	22.6	24.0	23.0	24.3	24.6	22.9	24.3	23.2	24.5	24.8
4H	23.2	24.5	23.5	24.8	25.1	23.5	24.8	23.9	25.1	25.4
6H	23.6	24.8	23.9	25.1	25.5	24.0	25.2	24.3	25.5	25.9
8H	23.7	24.9	24.1	25.2	25.6	24.1	25.3	24.5	25.6	26.0
12H	23.7	24.9	24.1	25.2	25.6	24.2	25.4	24.6	25.7	26.1
4H 2H	21.8	23.1	22.2	23.4	23.7	22.0	23.3	22.3	23.6	23.9
3H	23.4	24.6	23.8	24.9	25.3	23.6	24.8	24.0	25.1	25.5
4H	24.1	25.1	24.5	25.5	25.9	24.4	25.4	24.8	25.8	26.2
6H	24.6	25.5	25.1	25.9	26.4	25.0	25.9	25.4	26.3	26.7
8H	24.8	25.6	25.2	26.1	26.5	25.2	26.1	25.6	26.5	26.9
12H	24.9	25.7	25.3	26.1	26.6	25.3	26.1	25.8	26.6	27.0
8H 4H	24.4	25.2	24.8	25.7	26.1	24.6	25.5	25.1	25.9	26.3
6H	25.0	25.7	25.5	26.2	26.7	25.4	26.1	25.8	26.5	27.0
8H	25.3	25.9	25.8	26.4	26.9	25.7	26.3	26.2	26.8	27.3
12H	25.4	26.0	26.0	26.5	27.0	25.9	26.5	26.4	26.9	27.5
12H 4H	24.4	25.2	24.9	25.6	26.1	24.6	25.4	25.1	25.8	26.3
6H	25.1	25.7	25.6	26.2	26.7	25.4	26.1	25.9	26.5	27.0
8H	25.4	25.9	25.9	26.4	27.0	25.8	26.3	26.3	26.8	27.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				

CIE Pub.117, 3687 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.5)
 Area: 0.09 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.50V I:0.1390A P:30.300W PF:0.9830 Freq:50.00Hz Lamp Flux:3687.34x1 lm		
Name: NS42-φ400-30W	Type: LED	
MFR.: Lumega Group	DIM.: D400*H40mm	
	SUR.: D340mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	71	64	56	48
1.25	82	72	64	81	71	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	81	76	68
2.50	98	90	84	96	88	83	91	86	81	72
3.00	101	94	89	99	93	87	94	89	85	76
4.00	105	100	95	103	98	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	93	83
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.50V I:0.1390A P:30.300W PF:0.9830 Freq:50.00Hz		
Lamp Flux:3687.34x1 lm		
Name: NS42-φ400-30W	Type: LED	
MFR.: Lumega Group	DIM.: D400*H40mm	
	SUR.: D340mm	

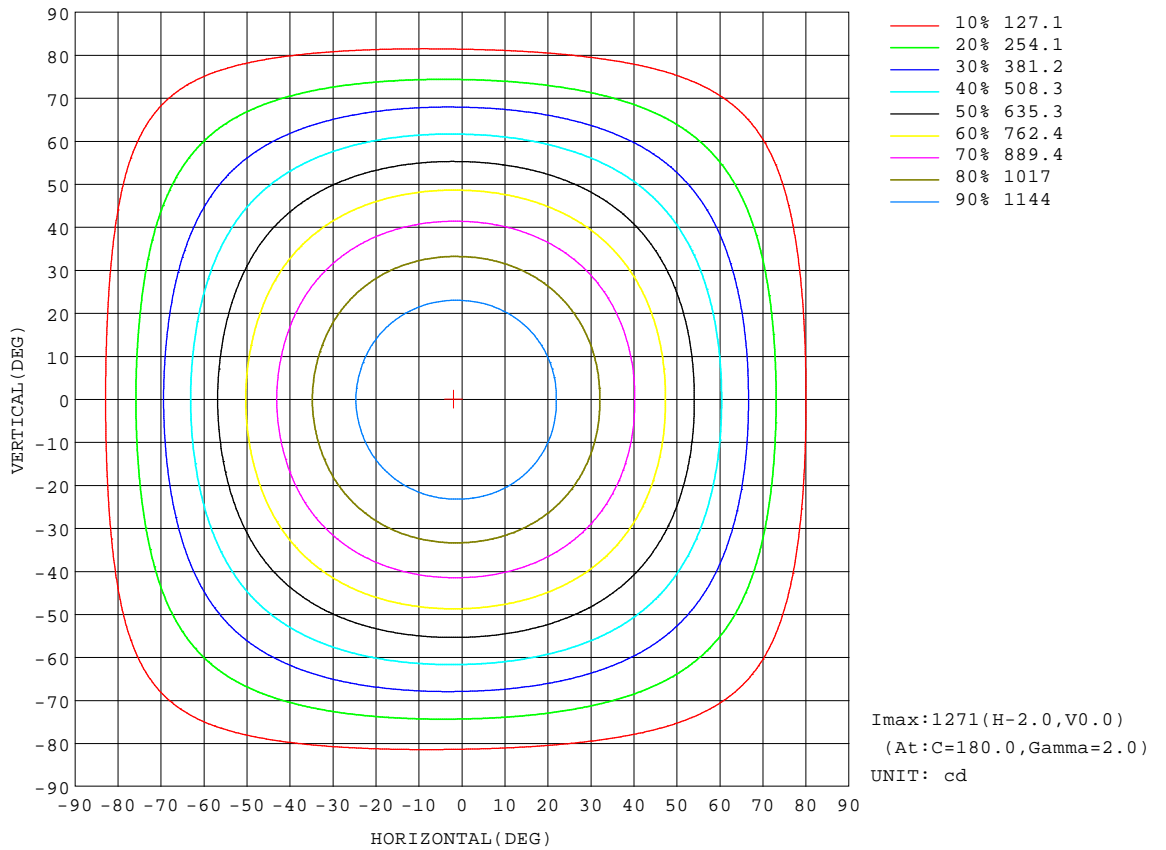


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.50V I:0.1390A P:30.300W PF:0.9830 Freq:50.00Hz		
Lamp Flux:3687.34x1 lm		
Name: NS42-φ400-30W	Type: LED	
MFR.: Lumega Group	DIM.: D400*H40mm	
	SUR.: D340mm	

Flux out:2600 lm

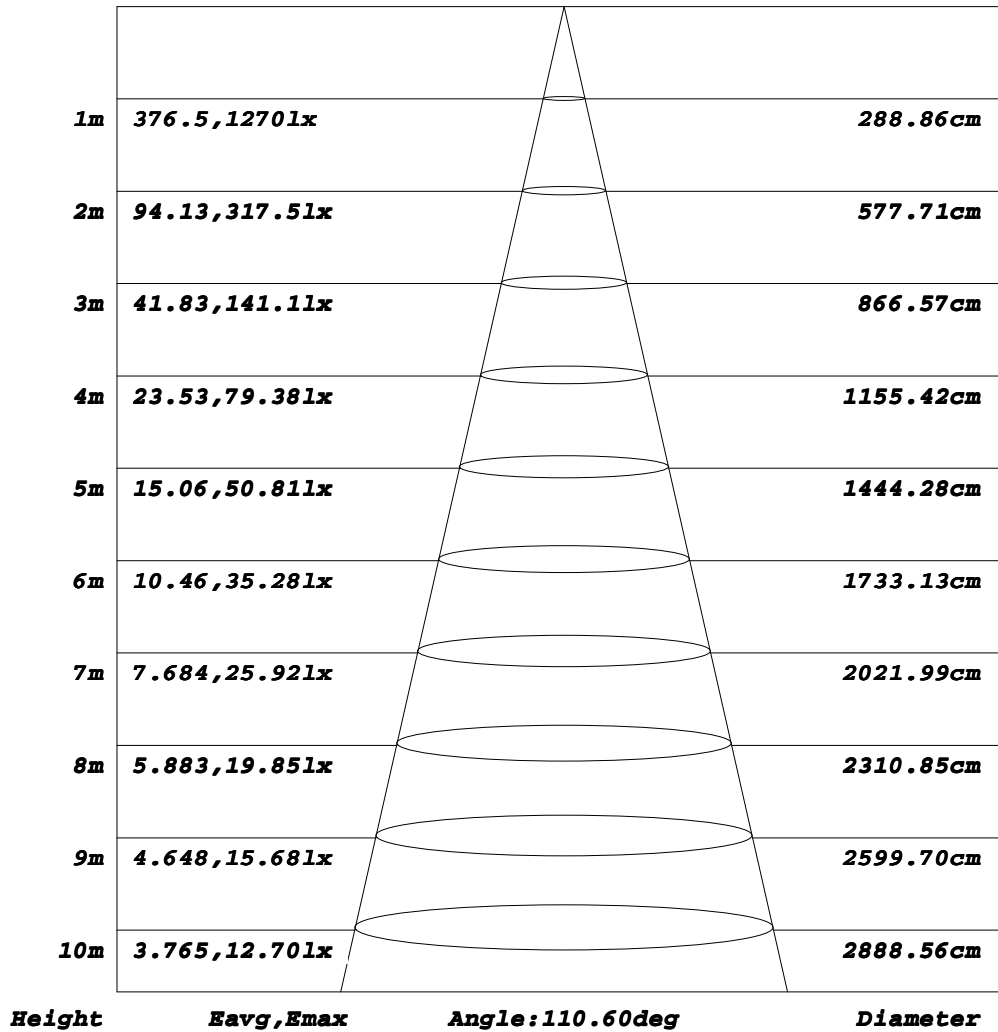


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.50V I:0.1390A P:30.300W PF:0.9830 Freq:50.00Hz		
Lamp Flux:3687.34x1 lm		
Name: NS42-φ400-30W	Type: LED	
MFR.: Lumega Group	DIM.: D400*H40mm	
	SUR.: D340mm	

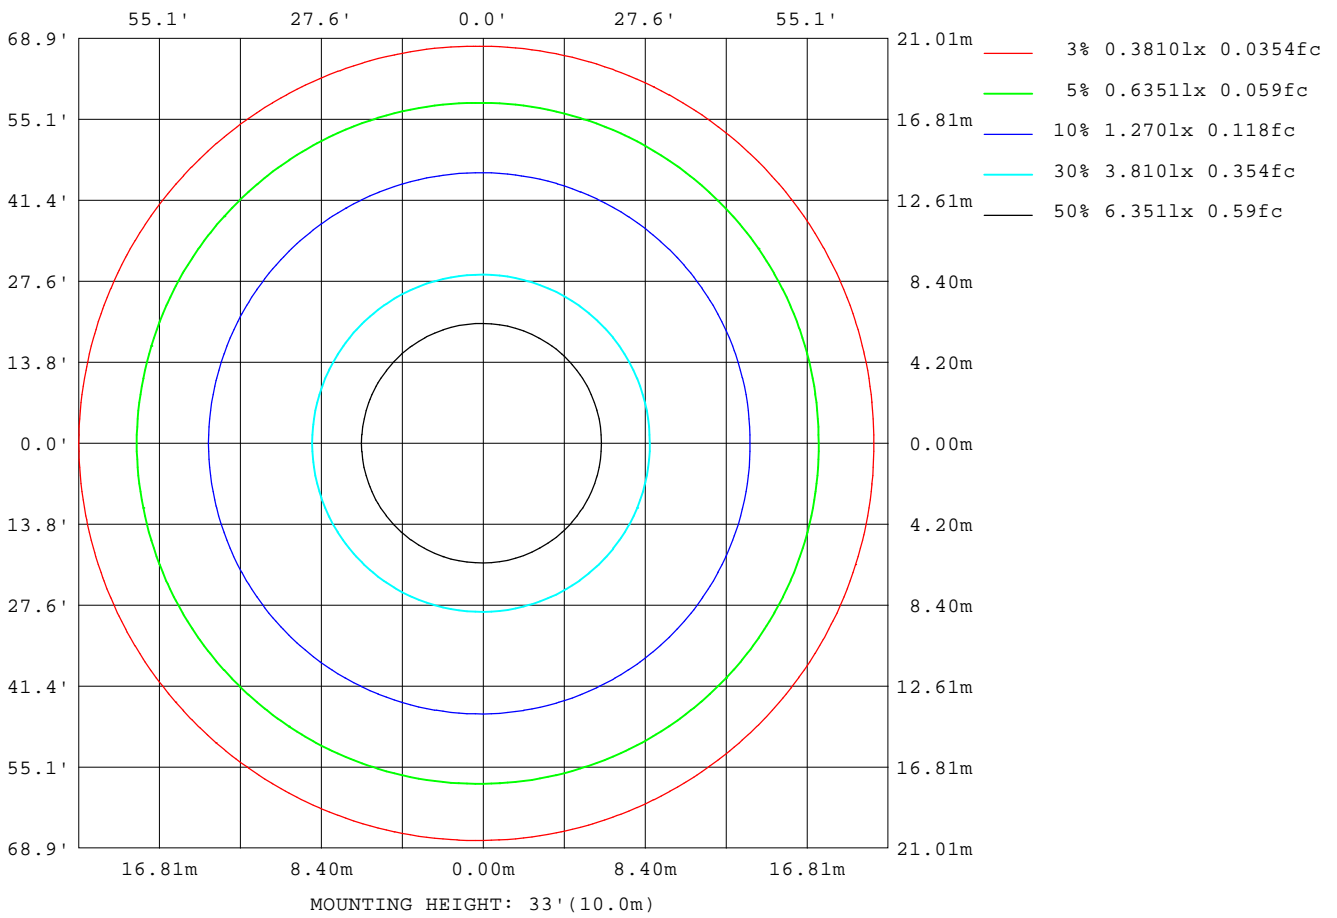

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

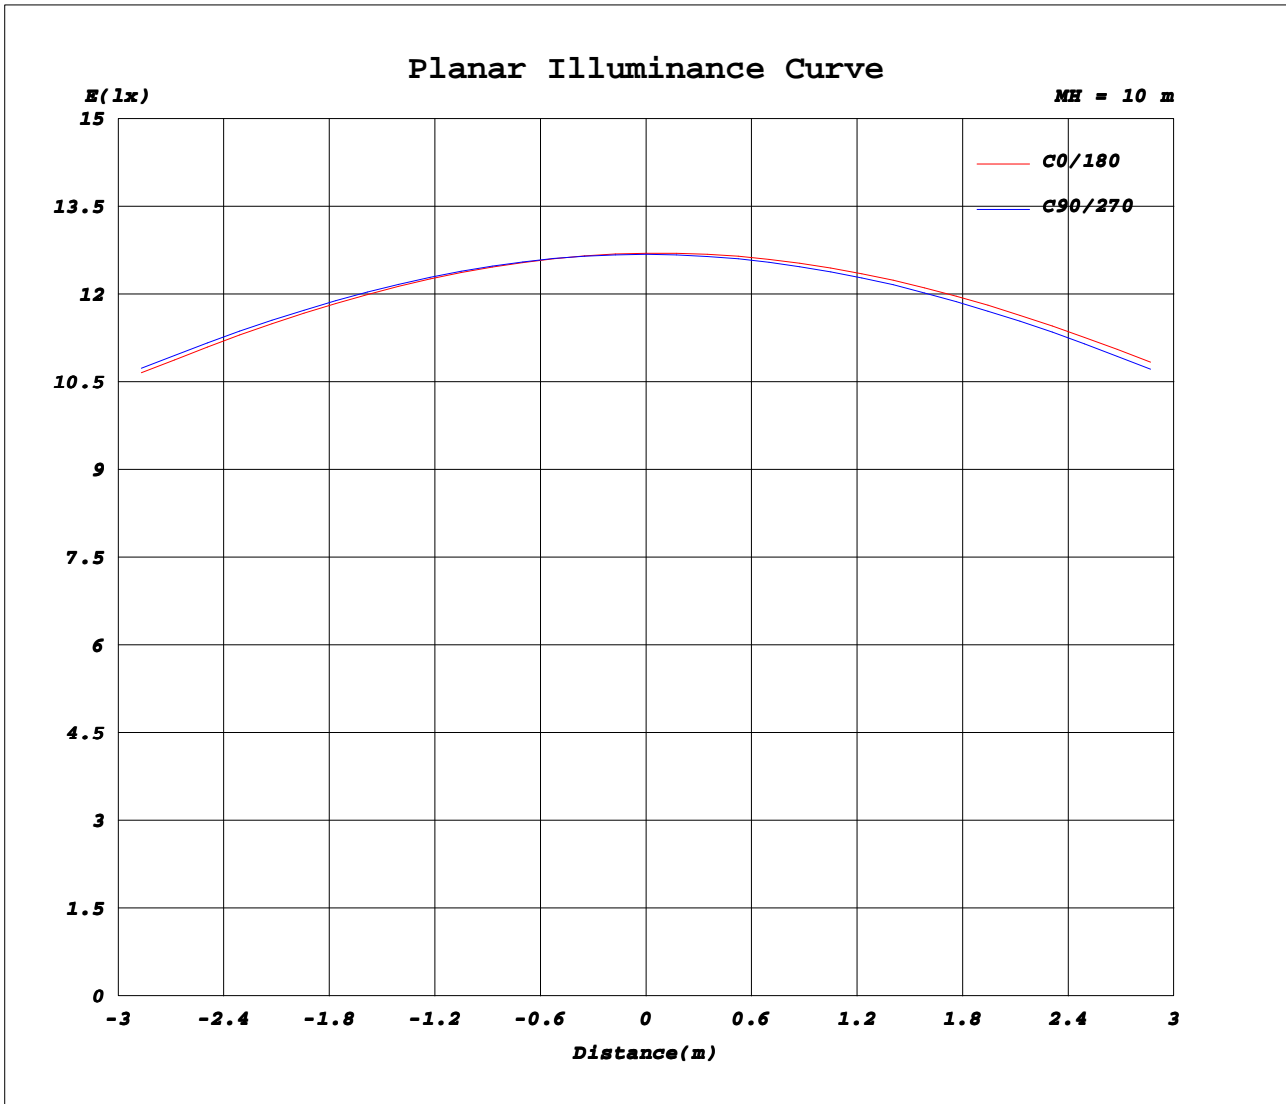

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.50V I:0.1390A P:30.300W PF:0.9830 Freq:50.00Hz Lamp Flux:3687.34x1 lm		
Name: NS42-φ400-30W	Type: LED	
MFR.: Lumega Group	DIM.: D400*H40mm	
	SUR.: D340mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1270	1269	1268	1268	1269	1269	1270	1269	1269	1268	1268	1269							
5	1261	1261	1261	1262	1264	1266	1268	1266	1264	1262	1261	1260							
10	1240	1241	1243	1245	1248	1251	1253	1250	1247	1243	1241	1240							
15	1207	1210	1212	1216	1220	1224	1227	1224	1219	1214	1211	1209							
20	1164	1167	1171	1175	1181	1186	1189	1185	1179	1173	1169	1166							
25	1109	1114	1118	1123	1131	1137	1140	1136	1129	1121	1116	1112							
30	1045	1051	1057	1063	1071	1078	1082	1077	1069	1060	1054	1049							
35	973	980	987	993	1003	1010	1014	1008	999	990	983	977							
40	893	900	907	915	925	933	938	931	922	911	904	898							
45	805	813	821	829	841	851	856	849	839	826	818	811							
50	714	721	730	738	751	762	768	761	749	736	727	720							
55	616	625	633	642	655	665	671	664	653	640	631	623							
60	516	524	533	543	556	566	573	565	553	539	531	523							
65	414	423	432	441	454	464	470	463	452	439	430	422							
70	314	322	331	340	353	363	369	362	351	338	329	321							
75	216	224	233	241	254	264	270	263	252	240	231	223							
80	127	135	143	151	162	171	177	171	161	150	142	134							
85	51.5	57.5	63.8	70.5	80.0	88.1	93.0	88.0	79.9	70.4	63.7	57.4							
90	6.74	6.10	6.88	9.09	14.8	20.3	24.2	20.7	15.5	9.95	7.66	6.58							
95	7.75	7.34	7.23	7.42	8.15	9.00	9.80	10.1	10.2	10.0	9.54	8.78							
100	8.88	8.47	8.35	8.52	9.20	10.00	10.8	11.1	11.2	11.0	10.6	9.87							
105	10.1	9.66	9.54	9.70	10.3	11.1	11.8	12.2	12.3	12.1	11.7	11.0							
110	11.2	10.9	10.7	10.9	11.5	12.2	12.9	13.3	13.4	13.2	12.8	12.2							
115	12.4	12.1	11.9	12.1	12.7	13.4	14.0	14.3	14.5	14.4	14.0	13.3							
120	13.6	13.2	13.2	13.3	13.8	14.5	15.1	15.5	15.6	15.5	15.1	14.5							
125	14.8	14.4	14.3	14.5	15.0	15.6	16.2	16.5	16.7	16.6	16.2	15.6							
130	15.9	15.6	15.5	15.7	16.1	16.7	17.3	17.6	17.7	17.6	17.3	16.7							
135	17.0	16.7	16.7	16.8	17.3	17.8	18.3	18.6	18.7	18.7	18.3	17.8							
140	18.1	17.8	17.8	17.9	18.3	18.8	19.3	19.6	19.7	19.6	19.3	18.8							
145	19.1	18.9	18.9	19.0	19.3	19.8	20.2	20.5	20.5	20.5	20.2	19.8							
150	20.2	20.0	19.9	20.0	20.3	20.7	21.1	21.3	21.4	21.3	21.1	20.7							
155	21.3	21.1	21.1	21.1	21.4	21.7	22.0	22.1	22.1	22.1	21.9	21.7							
160	22.4	22.2	22.2	22.2	22.4	22.6	22.8	22.9	22.9	22.8	22.7	22.6							
165	23.5	23.2	23.1	23.1	23.3	23.5	23.7	23.7	23.6	23.5	23.5	23.5							
170	24.2	24.0	23.9	23.8	24.0	24.2	24.3	24.3	24.1	24.0	24.0	24.1							
175	24.6	24.4	24.3	24.3	24.3	24.4	24.5	24.3	24.2	24.1	24.1	24.3							
180	24.5	24.3	24.2	24.2	24.3	24.4	24.5	24.4	24.3	24.1	24.2	24.3							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-04-27

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: