
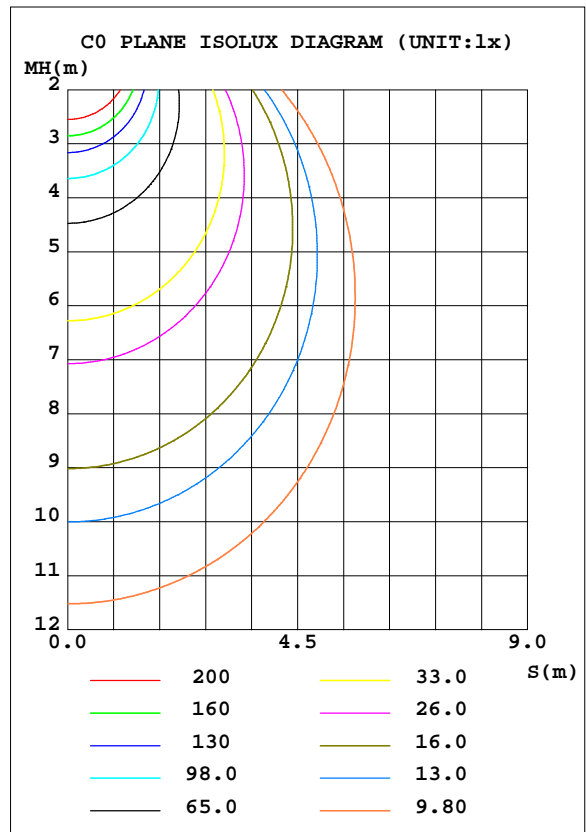


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.80V I:0.1880A P:39.100W PF:0.9590 Freq:50.00Hz		
Lamp Flux:3835.4x1 lm		
Name: NS42-φ500-40W	Type: LED	
MFR.: Lumega Group	DIM.: D500*H40mm	
	SUR.: D400mm	

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		I _{max} (cd)	1300	S/MH(C0/180)	1.26
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3835.4	η UP, DN(C0-180)	1.3, 47.7
NOMINAL FLUX(lm)	3835.4	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.4, 49.6
LAMPS INSIDE	1	η up(%)	2.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	97.4	CIBSE SHR MAX	1.35

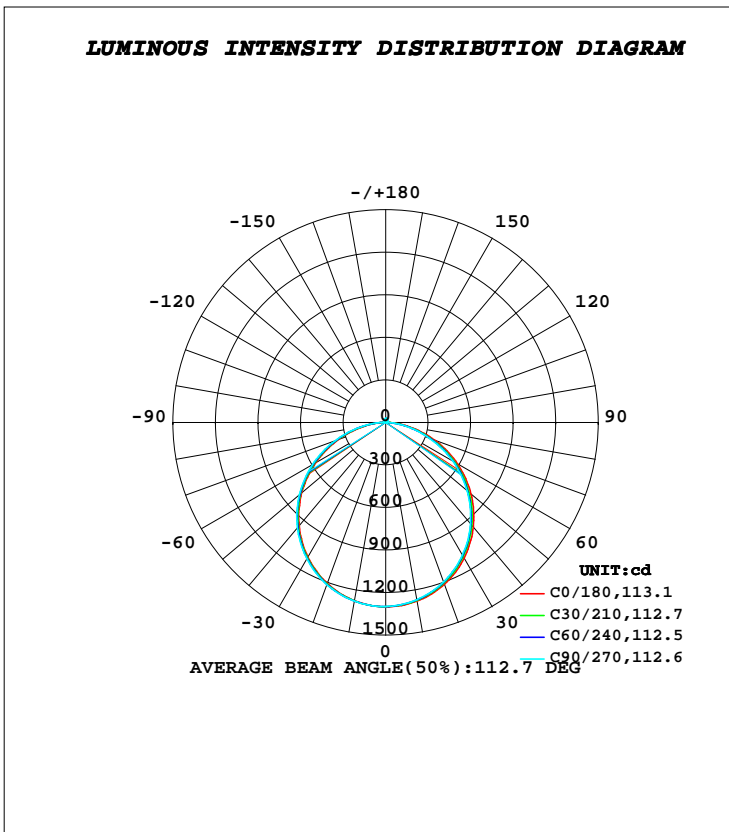

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1279	1272	1269	1272	1276	1278	1279	1279	0- 10	122.9	122.9	3.2,3.2
20	1214	1202	1196	1200	1207	1213	1217	1217	10- 20	352.1	474.9	12.4,12.4
30	1106	1089	1082	1087	1097	1105	1112	1111	20- 30	533.8	1009	26.3,26.3
40	961.8	941.0	931.1	937.6	949.7	960.8	969.1	968.5	30- 40	644.1	1653	43.1,43.1
50	786.1	761.1	749.7	759.3	775.2	787.2	795.4	794.1	40- 50	668.8	2322	60.5,60.5
60	585.6	560.3	548.3	556.2	571.2	585.8	596.7	595.2	50- 60	605.3	2927	76.3,76.3
70	369.8	343.6	331.1	338.7	353.9	370.9	383.8	381.7	60- 70	462.2	3389	88.4,88.4
80	158.7	138.1	128.5	135.1	147.8	162.2	172.9	170.2	70- 80	266.8	3656	95.3,95.3
90	10.65	7.860	6.532	6.915	8.981	15.15	20.01	17.59	80- 90	78.07	3734	97.4,97.4
100	8.733	8.944	9.392	10.26	11.12	11.75	11.84	10.71	90-100	10.17	3744	97.6,97.6
110	11.79	11.61	11.86	12.83	13.86	14.45	14.50	13.52	100-110	12.41	3757	97.9,97.9
120	14.41	14.30	14.59	15.54	16.50	16.84	16.70	15.83	110-120	14.19	3771	98.3,98.3
130	16.35	16.70	17.16	17.85	18.48	18.80	18.71	17.82	120-130	14.97	3786	98.7,98.7
140	18.80	19.52	20.08	20.44	20.68	20.93	20.87	20.09	130-140	14.63	3800	99.1,99.1
150	22.34	22.98	23.50	23.91	24.11	23.82	23.36	22.88	140-150	13.59	3814	99.4,99.4
160	24.92	25.39	25.73	25.94	25.97	25.64	25.25	25.04	150-160	11.28	3825	99.7,99.7
170	27.70	27.45	27.36	27.59	27.78	27.43	27.10	27.26	160-170	7.492	3833	99.9,99.9
180	28.27	27.89	27.74	27.97	28.22	28.00	27.79	27.93	170-180	2.649	3835	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.80V I:0.1880A P:39.100W PF:0.9590 Freq:50.00Hz		
Lamp Flux:3835.4x1 lm		
Name: NS42-φ500-40W	Type: LED	
MFR.: Lumega Group	DIM.: D500*H40mm	
	SUR.: D400mm	

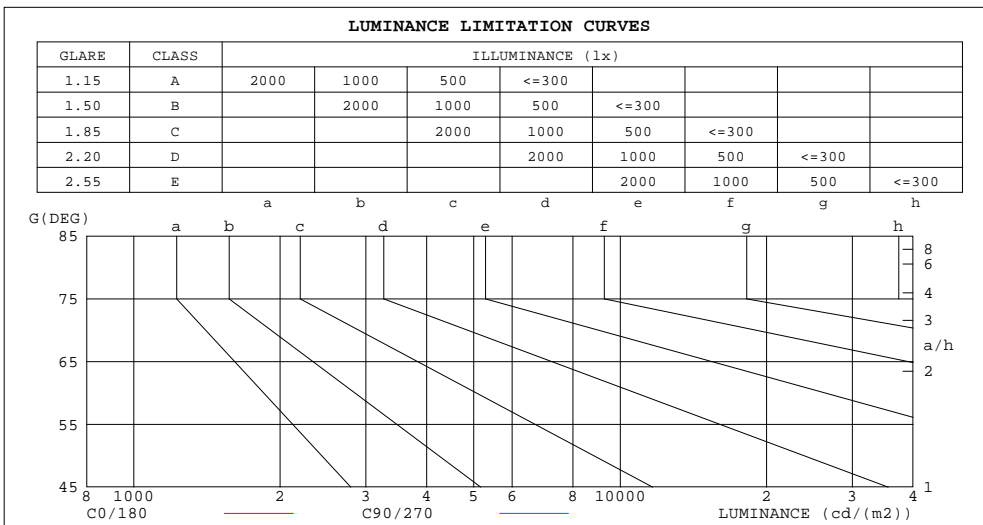

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	66949	45459
80	73099	59205
75	80822	69423
70	86506	77440
65	90701	83150
60	93700	87725
55	96036	90823
50	97835	93312
45	99106	95417


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.80V I:0.1880A P:39.100W PF:0.9590 Freq:50.00Hz		
Lamp Flux:3835.4x1 lm		
Name: NS42-φ500-40W	Type: LED	
MFR.: Lumega Group	DIM.: D500*H40mm	
	SUR.: D400mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.86	.87	.85	.83	.81
2.0	.90	.83	.77	.88	.81	.76	.84	.78	.74	.80	.76	.72	.77	.73	.70	.67
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.70	.65	.60	.68	.63	.59	.57
4.0	.70	.61	.54	.68	.60	.54	.65	.58	.53	.63	.56	.52	.60	.55	.51	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.45	.54	.48	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.49	.43	.39	.36
7.0	.51	.42	.36	.50	.41	.35	.48	.40	.35	.46	.40	.35	.45	.39	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.42	.36	.31	.41	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.35	.29	.25	.23

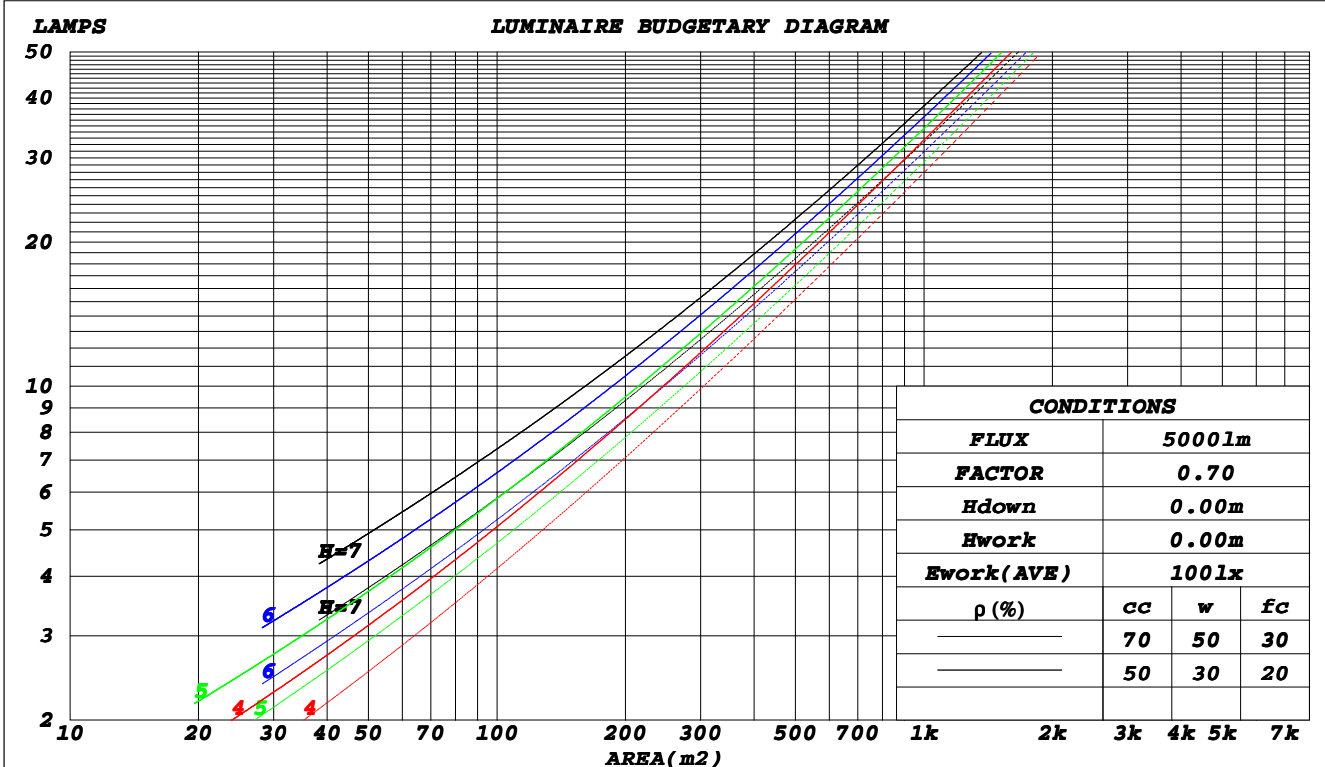

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.80V I:0.1880A P:39.100W PF:0.9590 Freq:50.00Hz		
Lamp Flux:3835.4x1 lm		
Name: NS42-φ500-40W	Type: LED	
MFR.: Lumega Group	DIM.: D500*H40mm	
	SUR.: D400mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.311	.177	.056	.304	.173	.055	.289	.166	.053	.275	.159	.051	.263	.152	.049	
2.0	.292	.160	.049	.285	.157	.048	.272	.151	.047	.260	.146	.046	.249	.141	.044	
3.0	.270	.144	.043	.264	.141	.043	.252	.137	.042	.241	.132	.041	.231	.128	.040	
4.0	.249	.129	.038	.243	.127	.038	.233	.124	.037	.223	.120	.036	.214	.117	.035	
5.0	.230	.117	.034	.225	.116	.034	.216	.112	.033	.207	.109	.033	.199	.106	.032	
6.0	.213	.107	.031	.209	.106	.030	.201	.103	.030	.193	.100	.029	.186	.098	.029	
7.0	.198	.098	.028	.195	.097	.028	.187	.095	.027	.180	.092	.027	.173	.090	.026	
8.0	.185	.091	.025	.182	.089	.025	.175	.087	.025	.169	.085	.025	.163	.084	.024	
9.0	.174	.084	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.153	.078	.022	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.074	.021	.145	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.211	.211	.211	.180	.180	.180	.123	.123	.123	.071	.071	.071	.023	.023	.023	
1.0	.201	.176	.155	.172	.151	.133	.117	.104	.092	.068	.060	.053	.022	.019	.017	
2.0	.193	.152	.118	.165	.131	.102	.113	.091	.071	.065	.053	.042	.021	.017	.014	
3.0	.185	.135	.095	.159	.116	.082	.109	.081	.058	.063	.047	.034	.020	.015	.011	
4.0	.177	.122	.079	.152	.105	.069	.105	.073	.048	.061	.043	.029	.019	.014	.009	
5.0	.170	.111	.068	.146	.096	.059	.101	.067	.042	.058	.039	.025	.019	.013	.008	
6.0	.163	.103	.060	.140	.089	.052	.097	.062	.037	.056	.037	.022	.018	.012	.007	
7.0	.156	.096	.054	.134	.083	.047	.093	.058	.033	.054	.034	.020	.017	.011	.007	
8.0	.150	.090	.050	.129	.078	.043	.089	.055	.031	.052	.032	.018	.017	.011	.006	
9.0	.144	.085	.046	.124	.074	.040	.086	.052	.029	.050	.031	.017	.016	.010	.006	
10.0	.138	.081	.043	.119	.070	.038	.082	.050	.027	.048	.029	.016	.016	.010	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.80V I:0.1880A P:39.100W PF:0.9590 Freq:50.00Hz		
Lamp Flux:3835.4x1 lm		
Name: NS42-φ500-40W	Type: LED	
MFR.: Lumega Group	DIM.: D500*H40mm	
	SUR.: D400mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	28.5	30.0	28.8	30.3	30.5	28.3	29.8	28.6	30.0	30.3
3H	30.1	31.5	30.4	31.7	32.0	29.7	31.1	30.1	31.4	31.7
4H	30.7	32.0	31.1	32.3	32.6	30.3	31.6	30.6	31.9	32.2
6H	31.1	32.4	31.5	32.7	33.0	30.6	31.8	31.0	32.2	32.5
8H	31.3	32.5	31.7	32.8	33.2	30.7	31.9	31.1	32.2	32.6
12H	31.4	32.5	31.8	32.9	33.2	30.7	31.9	31.1	32.2	32.6
4H 2H	29.1	30.4	29.4	30.7	31.0	28.9	30.2	29.2	30.5	30.8
3H	30.8	31.9	31.2	32.3	32.6	30.5	31.6	30.9	32.0	32.3
4H	31.5	32.6	32.0	33.0	33.3	31.2	32.2	31.6	32.6	33.0
6H	32.1	33.0	32.6	33.4	33.9	31.6	32.5	32.1	32.9	33.4
8H	32.3	33.2	32.8	33.6	34.0	31.8	32.6	32.2	33.0	33.5
12H	32.5	33.3	32.9	33.7	34.1	31.8	32.6	32.3	33.1	33.5
8H 4H	31.8	32.6	32.2	33.0	33.5	31.4	32.3	31.9	32.7	33.1
6H	32.5	33.2	32.9	33.6	34.1	32.0	32.7	32.5	33.2	33.7
8H	32.7	33.4	33.2	33.9	34.4	32.2	32.9	32.7	33.3	33.8
12H	33.0	33.5	33.5	34.0	34.5	32.4	32.9	32.9	33.4	33.9
12H 4H	31.8	32.5	32.2	33.0	33.4	31.4	32.2	31.9	32.6	33.1
6H	32.5	33.1	33.0	33.6	34.1	32.1	32.7	32.6	33.2	33.7
8H	32.8	33.4	33.3	33.9	34.4	32.3	32.9	32.8	33.3	33.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 3835 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.7)
 Area: 0.0125 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.80V I:0.1880A P:39.100W PF:0.9590 Freq:50.00Hz Lamp Flux:3835.4x1 lm		
Name: NS42-φ500-40W	Type: LED	
MFR.: Lumega Group	DIM.: D500*H40mm	
	SUR.: D400mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	54	44	38	31
0.80	67	55	47	65	54	47	63	53	47	40
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	80	71	64	77	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	81	76	68
2.50	98	90	84	96	88	83	91	85	81	72
3.00	101	94	89	99	93	87	94	89	85	76
4.00	105	100	95	103	98	93	98	94	90	80
5.00	108	103	99	105	101	97	100	97	93	83
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.80V I:0.1880A P:39.100W PF:0.9590 Freq:50.00Hz		
Lamp Flux:3835.4x1 lm		
Name: NS42-φ500-40W	Type: LED	
MFR.: Lumega Group	DIM.: D500*H40mm	
	SUR.: D400mm	

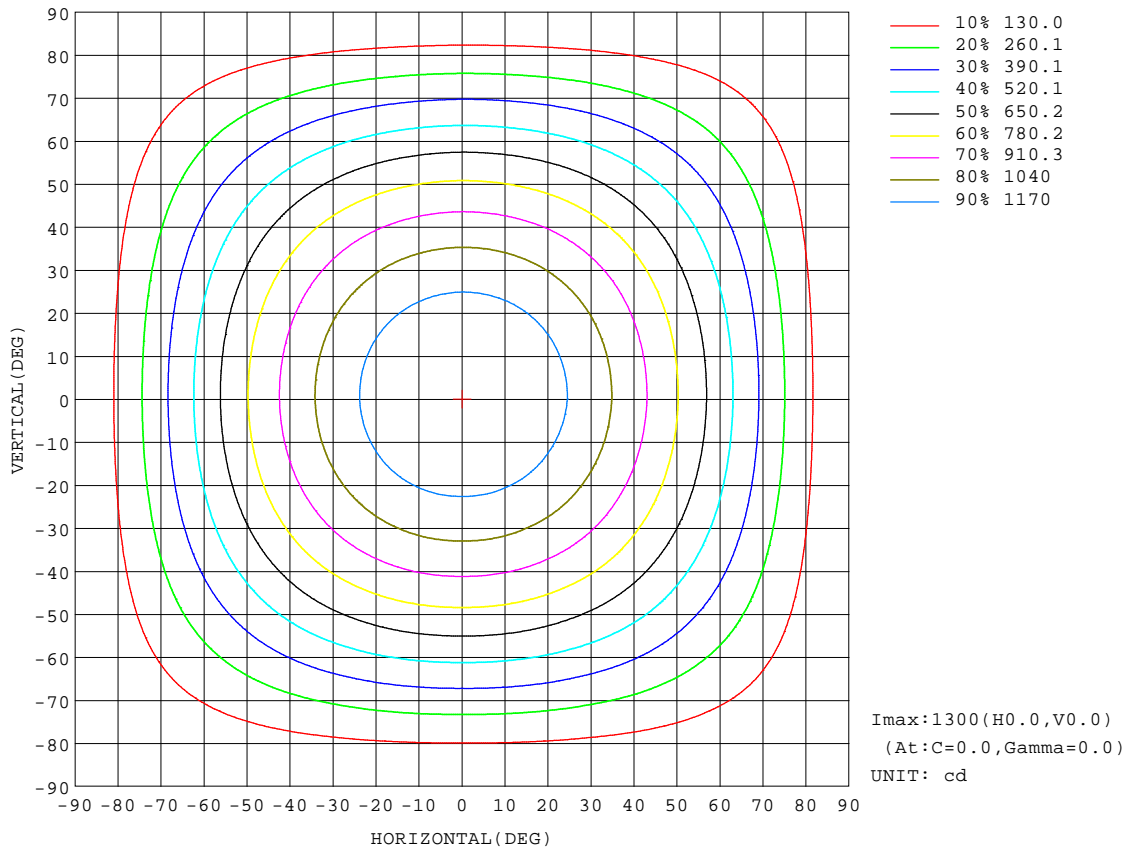


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.80V I:0.1880A P:39.100W PF:0.9590 Freq:50.00Hz		
Lamp Flux:3835.4x1 lm		
Name: NS42-φ500-40W	Type: LED	
MFR.: Lumega Group	DIM.: D500*H40mm	
	SUR.: D400mm	

Flux out:2757 lm

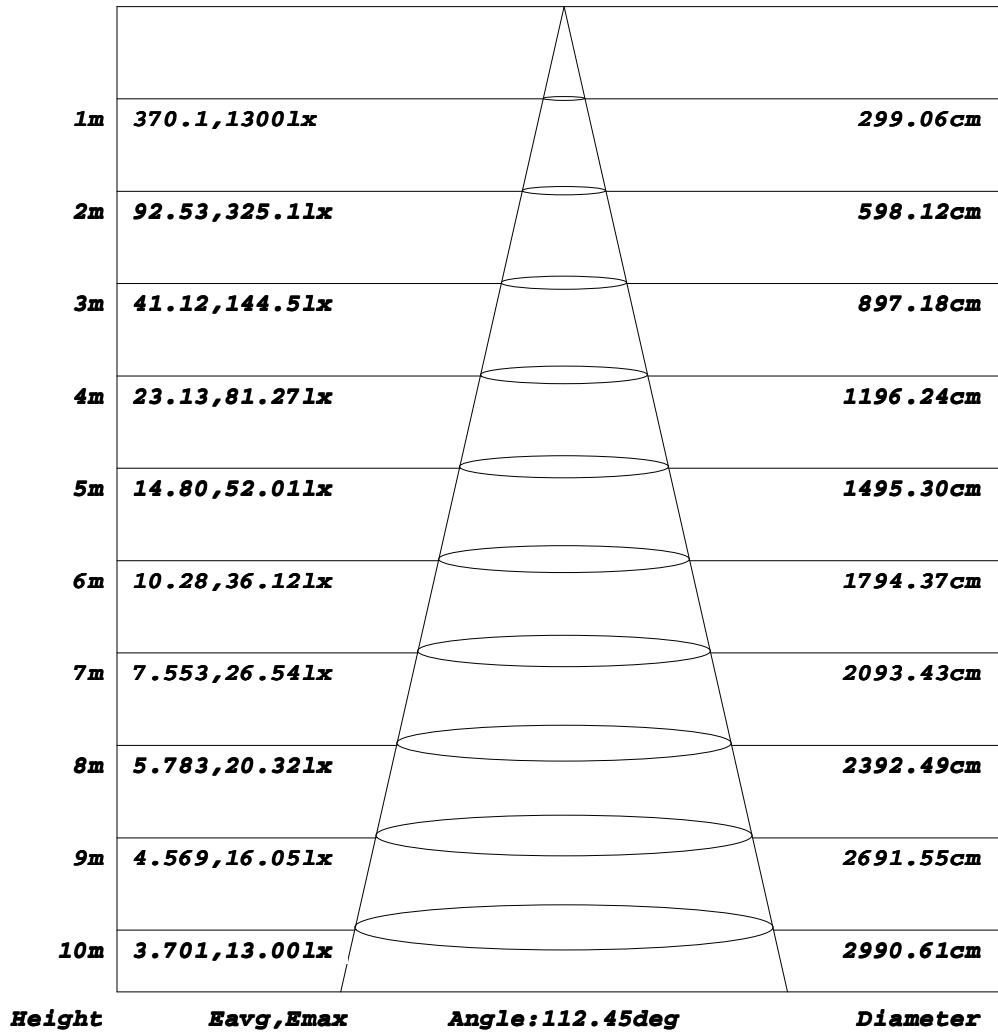


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.80V I:0.1880A P:39.100W PF:0.9590 Freq:50.00Hz		
Lamp Flux:3835.4x1 lm		
Name: NS42-φ500-40W	Type: LED	
MFR.: Lumega Group	DIM.: D500*H40mm	
	SUR.: D400mm	

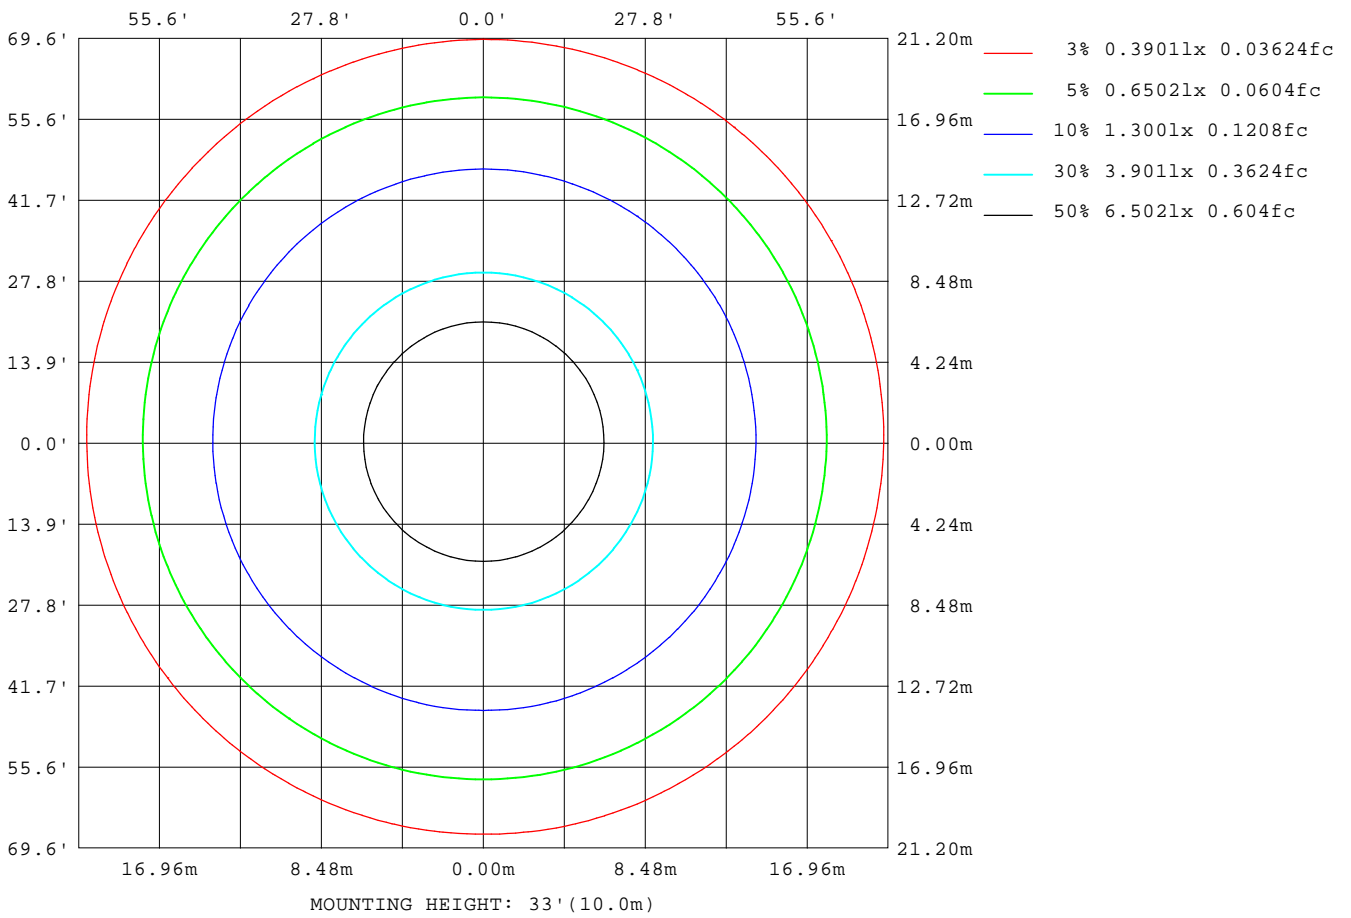

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

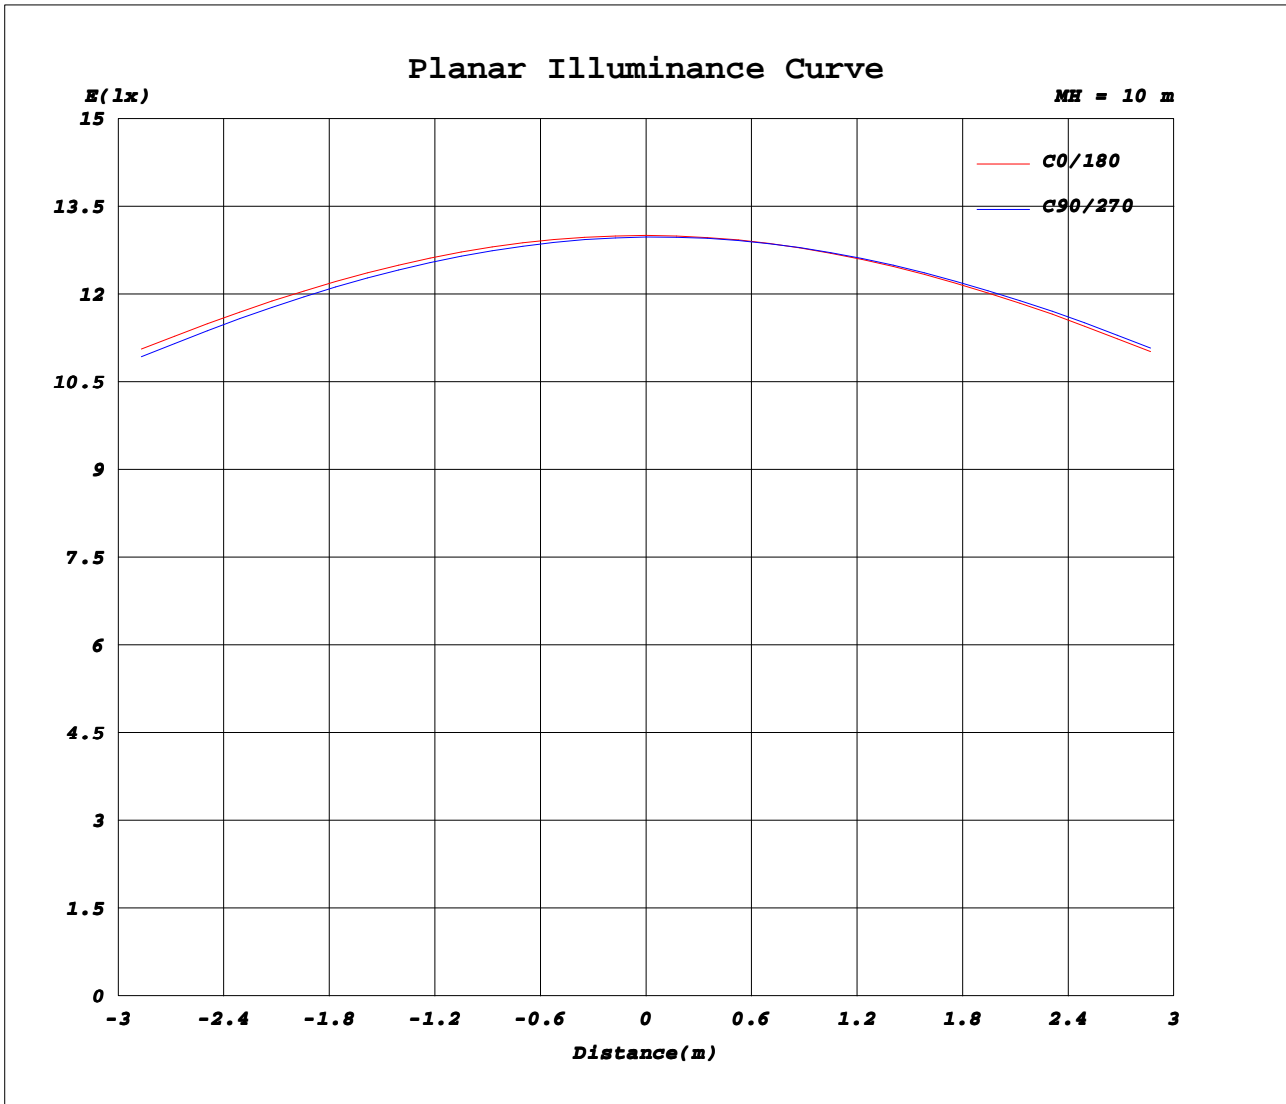

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.80V I:0.1880A P:39.100W PF:0.9590 Freq:50.00Hz Lamp Flux:3835.4x1 lm		
Name: NS42-φ500-40W	Type: LED	
MFR.: Lumega Group	DIM.: D500*H40mm	
	SUR.: D400mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1300	1299	1298	1298	1299	1300	1300	1300	1299	1298	1298	1299							
5	1295	1292	1290	1289	1290	1292	1294	1294	1294	1294	1295	1295							
10	1279	1274	1271	1269	1271	1273	1276	1277	1278	1279	1279	1279							
15	1252	1245	1240	1238	1240	1243	1247	1250	1252	1254	1254	1253							
20	1214	1205	1198	1196	1198	1202	1207	1211	1215	1217	1218	1217							
25	1165	1154	1147	1144	1146	1151	1157	1162	1166	1169	1170	1168							
30	1106	1094	1085	1082	1084	1090	1097	1103	1108	1112	1112	1110							
35	1038	1024	1015	1011	1014	1020	1028	1034	1041	1045	1045	1043							
40	962	946	936	931	934	941	950	957	964	969	970	967							
45	876	859	848	843	847	856	865	874	881	886	886	882							
50	786	767	755	750	755	764	775	784	791	795	796	792							
55	689	669	657	651	655	664	674	684	692	698	699	696							
60	586	566	554	548	552	560	571	581	590	597	597	593							
65	479	459	446	439	443	451	463	474	485	492	493	488							
70	370	350	337	331	335	343	354	366	376	384	384	379							
75	261	243	230	225	228	236	247	258	269	276	276	271							
80	159	143	133	129	132	139	148	158	167	173	173	168							
85	72.9	60.9	53.1	49.5	51.8	57.0	64.1	72.0	79.2	84.3	84.0	80.2							
90	10.6	8.55	7.17	6.53	6.52	7.31	8.98	13.1	17.2	20.0	19.2	16.0							
95	8.01	7.75	7.75	8.01	8.78	9.64	10.4	10.6	10.5	10.2	9.69	8.96							
100	8.73	8.83	9.05	9.39	9.95	10.6	11.1	11.6	11.9	11.8	11.2	10.2							
105	10.3	10.2	10.4	10.7	11.2	11.9	12.5	13.0	13.3	13.3	12.7	11.7							
110	11.8	11.6	11.6	11.9	12.5	13.2	13.9	14.3	14.6	14.5	14.0	13.1							
115	13.1	12.9	12.9	13.2	13.8	14.6	15.2	15.6	15.7	15.5	15.0	14.2							
120	14.4	14.3	14.3	14.6	15.2	15.9	16.5	16.8	16.9	16.7	16.2	15.4							
125	15.3	15.4	15.6	15.9	16.4	17.0	17.5	17.9	18.0	17.8	17.3	16.5							
130	16.3	16.6	16.8	17.2	17.6	18.1	18.5	18.8	18.8	18.7	18.2	17.4							
135	17.5	17.8	18.2	18.5	18.9	19.2	19.5	19.7	19.8	19.7	19.3	18.5							
140	18.8	19.3	19.7	20.1	20.3	20.5	20.7	20.9	21.0	20.9	20.4	19.7							
145	20.4	20.9	21.3	21.6	21.9	22.0	22.1	22.2	22.2	22.1	21.7	21.1							
150	22.3	22.8	23.2	23.5	23.8	24.0	24.1	24.0	23.7	23.4	23.0	22.7							
155	23.6	24.0	24.4	24.7	24.9	25.0	25.0	24.8	24.6	24.3	24.1	23.9							
160	24.9	25.3	25.5	25.7	25.9	26.0	26.0	25.8	25.5	25.2	25.1	25.0							
165	26.8	26.7	26.6	26.6	26.7	26.8	26.9	26.6	26.4	26.2	26.2	26.4							
170	27.7	27.5	27.4	27.4	27.5	27.7	27.8	27.6	27.3	27.1	27.2	27.4							
175	28.2	27.9	27.8	27.7	27.9	28.0	28.1	28.0	27.8	27.6	27.7	27.9							
180	28.3	28.0	27.8	27.7	27.9	28.1	28.2	28.1	27.9	27.8	27.8	28.0							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: