
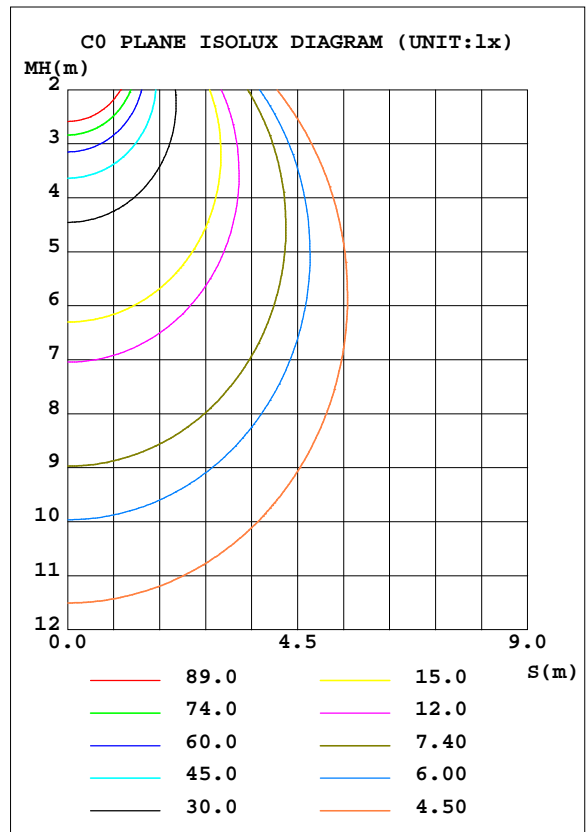


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.70V I:0.0630A P:14.600W PF:0.9700 Freq:50.00Hz		
Lamp Flux:1742.54x1 lm		
Name: NS44-φ220MM-15W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 119.35 lm/W			
MODEL		I _{max} (cd)	595.5	S/MH(C0/180)	1.24
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1742.5	η UP, DN(C0-180)	1.5,48.1
NOMINAL FLUX(lm)	1742.54	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.7,48.7
LAMPS INSIDE	1	η up(%)	3.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221.6	η down(%)	96.8	CIBSE SHR MAX	1.35

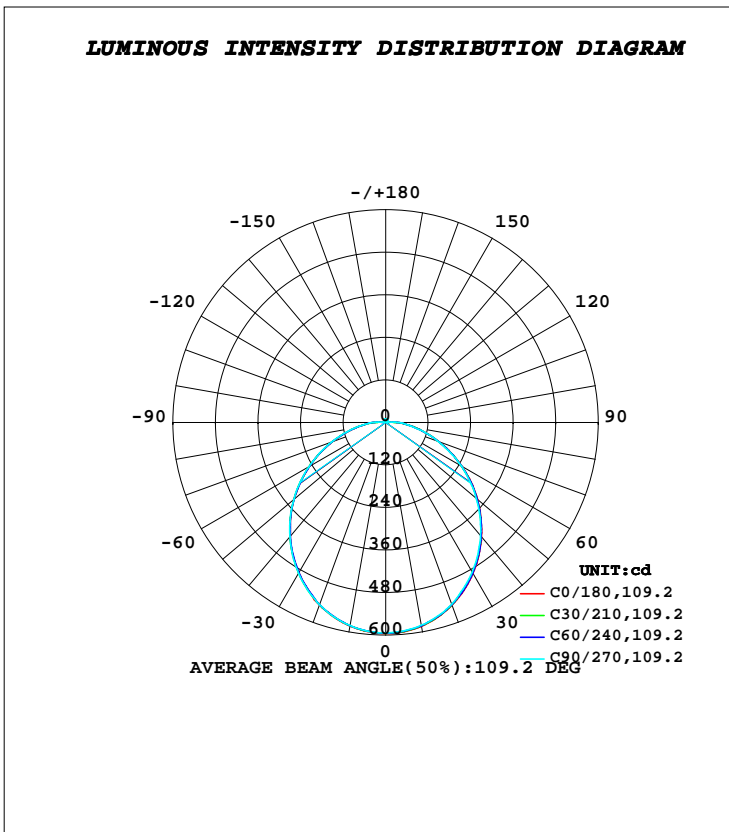

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	583.7	582.2	580.8	579.7	583.2	581.9	581.7	582.0	0- 10	56.11	56.11	3.22,3.22
20	548.5	547.0	545.4	543.6	547.9	546.9	546.9	548.0	10- 20	159.9	216.0	12.4,12.4
30	492.5	490.6	488.0	486.3	490.2	490.4	491.9	492.4	20- 30	239.7	455.7	26.1,26.1
40	421.0	419.3	416.7	414.5	419.4	419.3	420.8	422.1	30- 40	285.4	741.1	42.5,42.5
50	338.1	337.0	334.3	332.1	338.1	337.8	338.8	340.9	40- 50	292.4	1033	59.3,59.3
60	249.5	248.1	247.1	243.7	249.1	249.5	251.0	252.9	50- 60	262.2	1296	74.4,74.4
70	160.2	159.4	158.5	155.8	160.9	161.1	162.5	164.6	60- 70	202.0	1498	86,86
80	84.49	85.00	83.30	81.66	85.32	85.32	86.38	88.39	70- 80	127.7	1625	93.3,93.3
90	33.13	30.92	35.38	30.21	33.88	31.70	35.59	33.95	80- 90	61.60	1687	96.8,96.8
100	3.780	5.262	4.919	6.713	11.88	6.684	6.631	6.822	90-100	17.65	1705	97.8,97.8
110	6.260	5.150	4.870	5.321	6.478	6.166	5.892	6.438	100-110	5.880	1711	98.2,98.2
120	6.009	5.908	5.942	5.982	7.052	6.928	6.886	6.840	110-120	5.998	1717	98.5,98.5
130	7.031	6.960	7.033	7.041	8.022	7.905	7.865	7.812	120-130	6.219	1723	98.9,98.9
140	7.958	7.886	7.968	7.982	8.869	8.741	8.728	8.641	130-140	6.112	1729	99.2,99.2
150	8.739	8.685	8.722	8.797	9.503	9.398	9.326	9.284	140-150	5.457	1734	99.5,99.5
160	9.473	9.446	9.529	9.557	9.994	9.929	9.877	9.822	150-160	4.335	1739	99.8,99.8
170	9.997	10.18	10.19	10.24	10.33	10.39	10.35	10.25	160-170	2.823	1742	99.9,99.9
180	10.54	10.60	10.50	10.59	10.55	10.60	10.50	10.59	170-180	0.9933	1743	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.0630A P:14.600W PF:0.9700 Freq:50.00Hz		
Lamp Flux:1742.54x1 lm		
Name: NS44-φ220MM-15W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

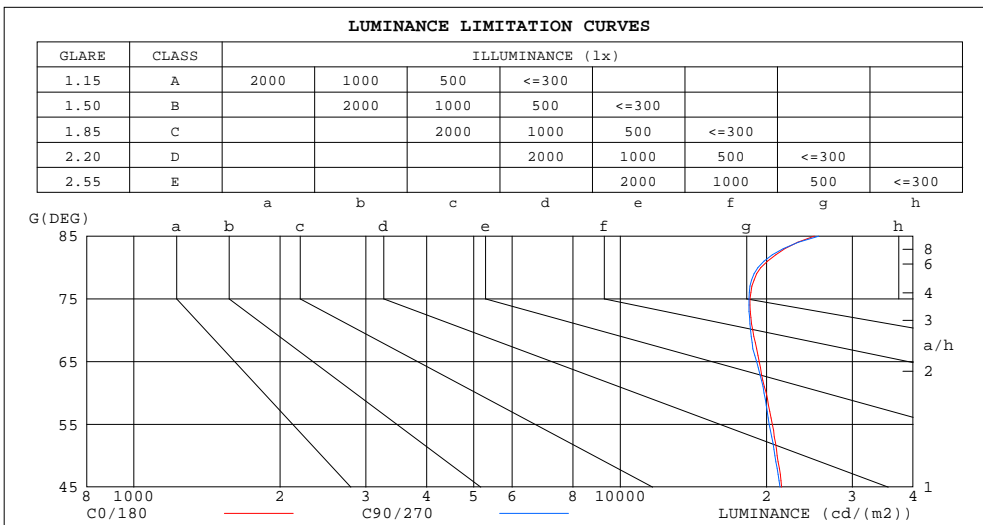

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	25080	25611
80	19463	19189
75	18476	18395
70	18741	18536
65	19314	19071
60	19957	19771
55	20554	20243
50	21040	20805
45	21491	21303


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.0630A P:14.600W PF:0.9700 Freq:50.00Hz		
Lamp Flux:1742.54x1 lm		
Name: NS44-φ220MM-15W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.02	.98	.94	.90	.95	.92	.95	.91	.88	.90	.88	.85	.86	.84	.82	.80
2.0	.89	.82	.76	.87	.80	.75	.83	.77	.72	.79	.74	.70	.75	.72	.68	.66
3.0	.78	.70	.63	.76	.68	.62	.73	.66	.61	.69	.64	.59	.66	.62	.58	.55
4.0	.69	.60	.53	.67	.59	.53	.65	.57	.52	.62	.56	.51	.59	.54	.50	.47
5.0	.62	.53	.46	.60	.52	.45	.58	.50	.45	.55	.49	.44	.53	.48	.43	.41
6.0	.55	.46	.40	.54	.46	.40	.52	.45	.39	.50	.44	.38	.48	.42	.38	.36
7.0	.50	.41	.35	.49	.41	.35	.48	.40	.35	.46	.39	.34	.44	.38	.34	.32
8.0	.46	.37	.31	.45	.37	.31	.43	.36	.31	.42	.35	.31	.41	.35	.30	.28
9.0	.42	.34	.28	.41	.34	.28	.40	.33	.28	.39	.32	.28	.37	.32	.27	.25
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

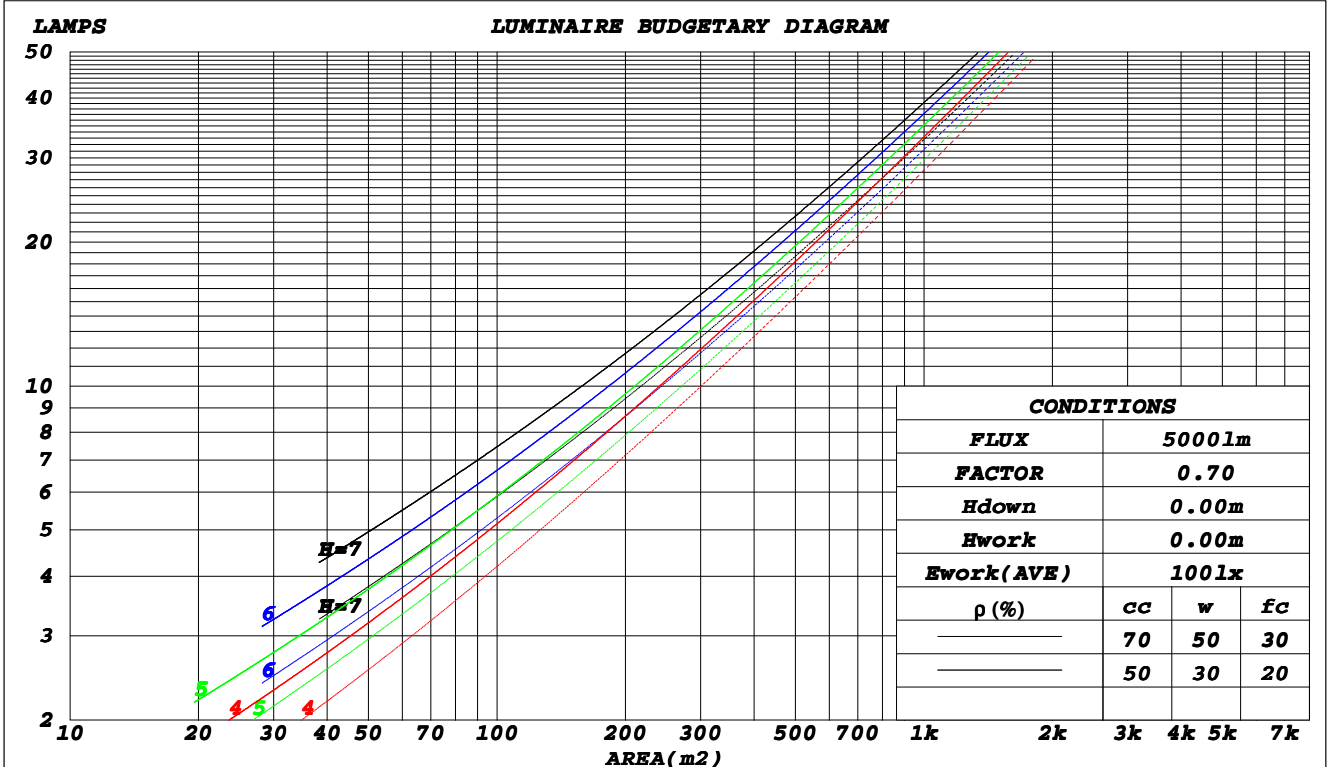

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.70V I:0.0630A P:14.600W PF:0.9700 Freq:50.00Hz		
Lamp Flux:1742.54x1 lm		
Name: NS44-φ220MM-15W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.327	.186	.059	.319	.182	.058	.304	.174	.056	.290	.167	.054	.277	.161	.052	
2.0	.300	.164	.050	.293	.161	.050	.279	.155	.048	.267	.150	.047	.255	.144	.046	
3.0	.274	.146	.044	.268	.143	.043	.256	.139	.042	.245	.134	.041	.235	.130	.040	
4.0	.251	.131	.038	.246	.129	.038	.235	.125	.037	.225	.121	.036	.216	.117	.036	
5.0	.232	.118	.034	.227	.116	.034	.217	.113	.033	.208	.110	.033	.200	.107	.032	
6.0	.214	.107	.031	.210	.106	.030	.201	.103	.030	.193	.100	.030	.186	.098	.029	
7.0	.199	.098	.028	.195	.097	.028	.187	.095	.027	.180	.092	.027	.173	.090	.026	
8.0	.186	.091	.026	.182	.090	.025	.175	.087	.025	.169	.085	.025	.162	.083	.024	
9.0	.174	.084	.023	.171	.083	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.149	.074	.021	.144	.073	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.215	.215	.215	.184	.184	.184	.125	.125	.125	.072	.072	.072	.023	.023	.023	
1.0	.206	.180	.157	.176	.155	.136	.121	.107	.094	.069	.062	.054	.022	.020	.018	
2.0	.198	.156	.122	.170	.135	.105	.116	.093	.073	.067	.054	.043	.021	.018	.014	
3.0	.190	.139	.098	.163	.120	.085	.112	.083	.060	.065	.049	.035	.021	.016	.012	
4.0	.182	.126	.083	.156	.109	.072	.108	.076	.051	.062	.044	.030	.020	.014	.010	
5.0	.175	.116	.072	.150	.100	.063	.103	.070	.044	.060	.041	.026	.019	.013	.009	
6.0	.167	.107	.064	.144	.093	.056	.099	.065	.039	.058	.038	.023	.019	.013	.008	
7.0	.161	.100	.058	.138	.087	.051	.095	.061	.036	.055	.036	.021	.018	.012	.007	
8.0	.154	.095	.054	.133	.082	.047	.092	.058	.033	.053	.034	.020	.017	.011	.007	
9.0	.148	.090	.050	.127	.078	.044	.088	.055	.031	.051	.032	.019	.017	.011	.006	
10.0	.142	.085	.048	.123	.074	.042	.085	.052	.030	.050	.031	.018	.016	.010	.006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.0630A P:14.600W PF:0.9700 Freq:50.00Hz		
Lamp Flux:1742.54x1 lm		
Name: NS44-φ220MM-15W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.1	24.6	23.4	24.8	25.1	23.0	24.5	23.4	24.8	25.1
3H	24.6	26.0	25.0	26.3	26.6	24.6	26.0	24.9	26.3	26.6
4H	25.3	26.6	25.7	26.9	27.3	25.3	26.6	25.6	26.9	27.2
6H	25.9	27.2	26.3	27.5	27.9	25.9	27.1	26.3	27.5	27.8
8H	26.2	27.4	26.6	27.8	28.1	26.2	27.4	26.6	27.7	28.1
12H	26.5	27.7	26.9	28.0	28.4	26.5	27.6	26.9	28.0	28.3
4H 2H	23.7	25.0	24.0	25.3	25.6	23.6	25.0	24.0	25.3	25.6
3H	25.4	26.6	25.8	26.9	27.3	25.4	26.5	25.8	26.9	27.3
4H	26.3	27.3	26.7	27.7	28.1	26.2	27.3	26.7	27.7	28.1
6H	27.0	28.0	27.5	28.4	28.8	27.0	27.9	27.4	28.3	28.8
8H	27.4	28.3	27.9	28.7	29.2	27.4	28.2	27.8	28.7	29.1
12H	27.8	28.6	28.3	29.0	29.5	27.7	28.6	28.2	29.0	29.5
8H 4H	26.6	27.5	27.0	27.9	28.3	26.6	27.4	27.0	27.9	28.3
6H	27.6	28.3	28.1	28.8	29.3	27.5	28.3	28.0	28.7	29.2
8H	28.1	28.7	28.6	29.2	29.7	28.0	28.7	28.5	29.2	29.7
12H	28.6	29.2	29.1	29.7	30.2	28.6	29.1	29.1	29.6	30.2
12H 4H	26.6	27.4	27.1	27.9	28.3	26.6	27.4	27.1	27.8	28.3
6H	27.7	28.3	28.2	28.8	29.3	27.6	28.3	28.2	28.8	29.3
8H	28.3	28.8	28.8	29.3	29.9	28.2	28.8	28.8	29.3	29.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 1743 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 1.9$)
 Area: 0.025 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.0630A P:14.600W PF:0.9700 Freq:50.00Hz Lamp Flux:1742.54x1 lm		
Name: NS44-φ220MM-15W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	45	38	55	44	37	54	44	37	31
0.80	66	54	47	65	54	47	63	53	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	70	63	80	70	63	77	68	62	54
1.50	86	76	69	84	75	68	81	73	67	59
2.00	93	84	77	91	83	76	87	80	75	66
2.50	97	89	82	95	87	81	90	84	79	70
3.00	100	93	87	98	91	86	93	88	83	74
4.00	104	98	93	102	96	92	97	93	89	79
5.00	107	102	97	104	100	95	99	95	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.0630A P:14.600W PF:0.9700 Freq:50.00Hz		
Lamp Flux:1742.54x1 lm		
Name: NS44-φ220MM-15W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

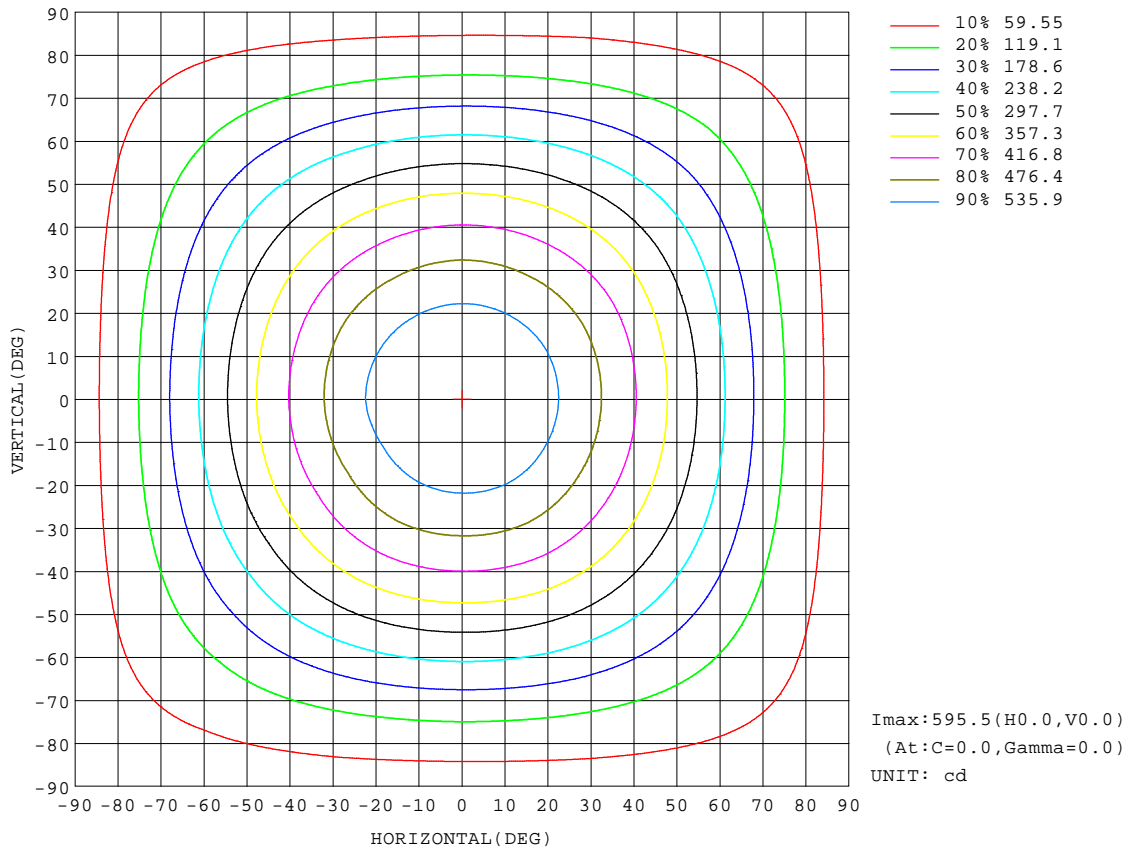


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.70V I:0.0630A P:14.600W PF:0.9700 Freq:50.00Hz		
Lamp Flux:1742.54x1 lm		
Name: NS44-φ220MM-15W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

Flux out:1171 lm

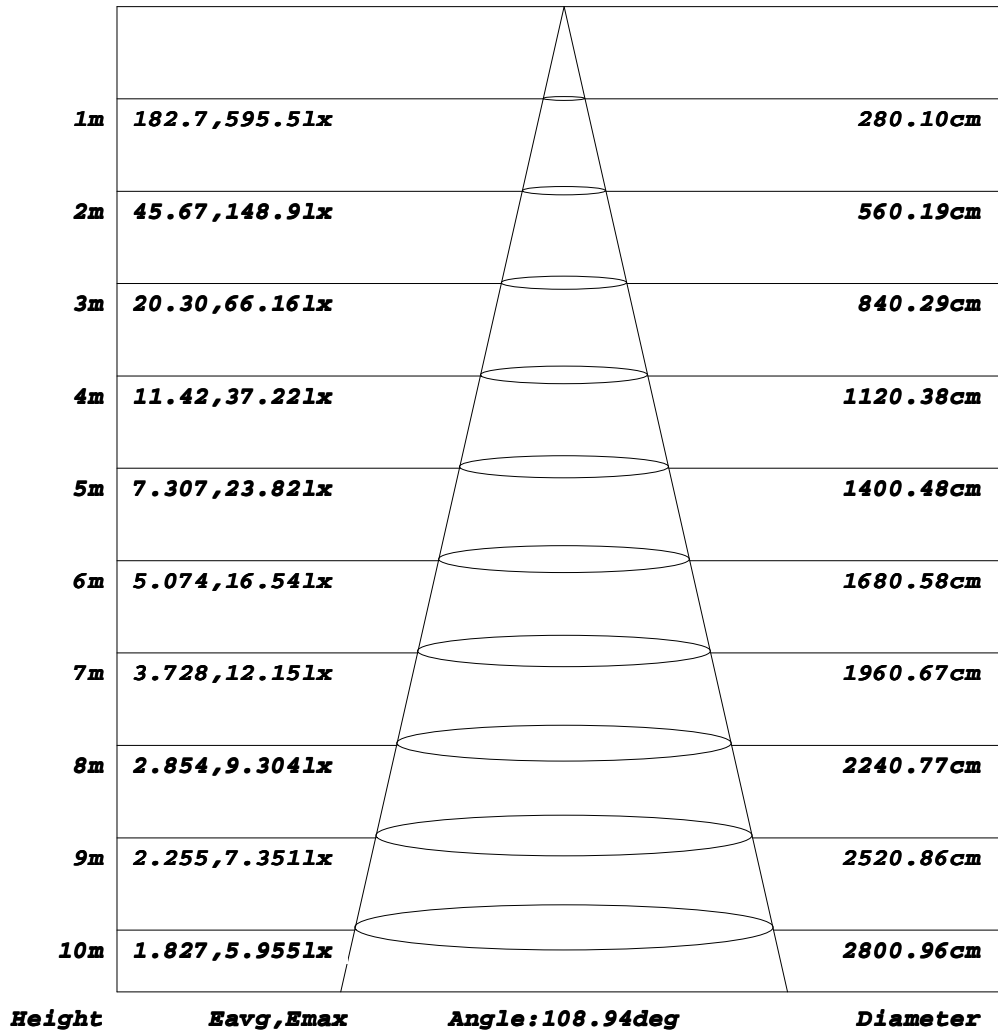


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.70V I:0.0630A P:14.600W PF:0.9700 Freq:50.00Hz		
Lamp Flux:1742.54x1 lm		
Name: NS44-φ220MM-15W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

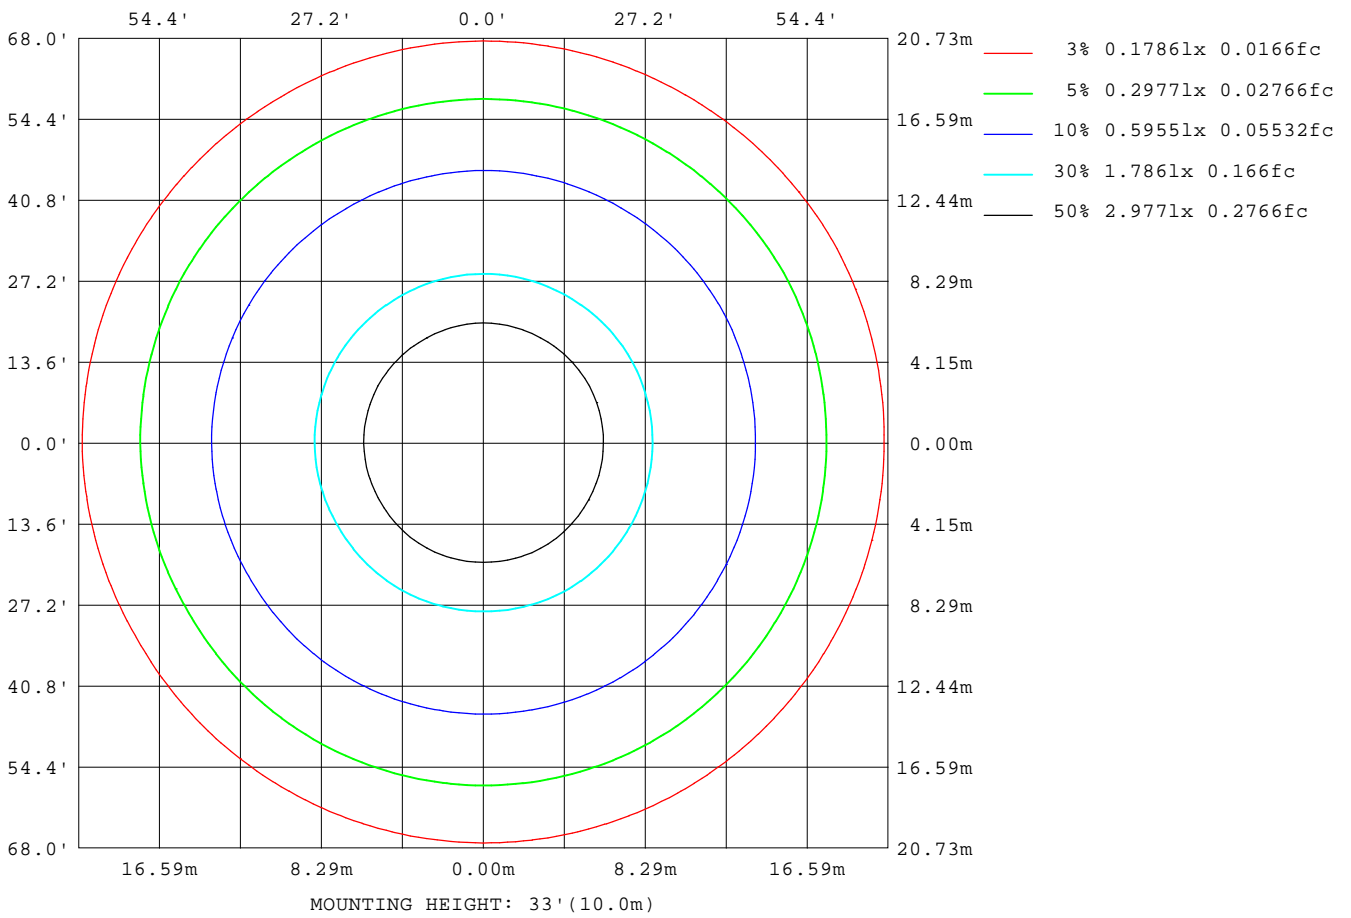

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

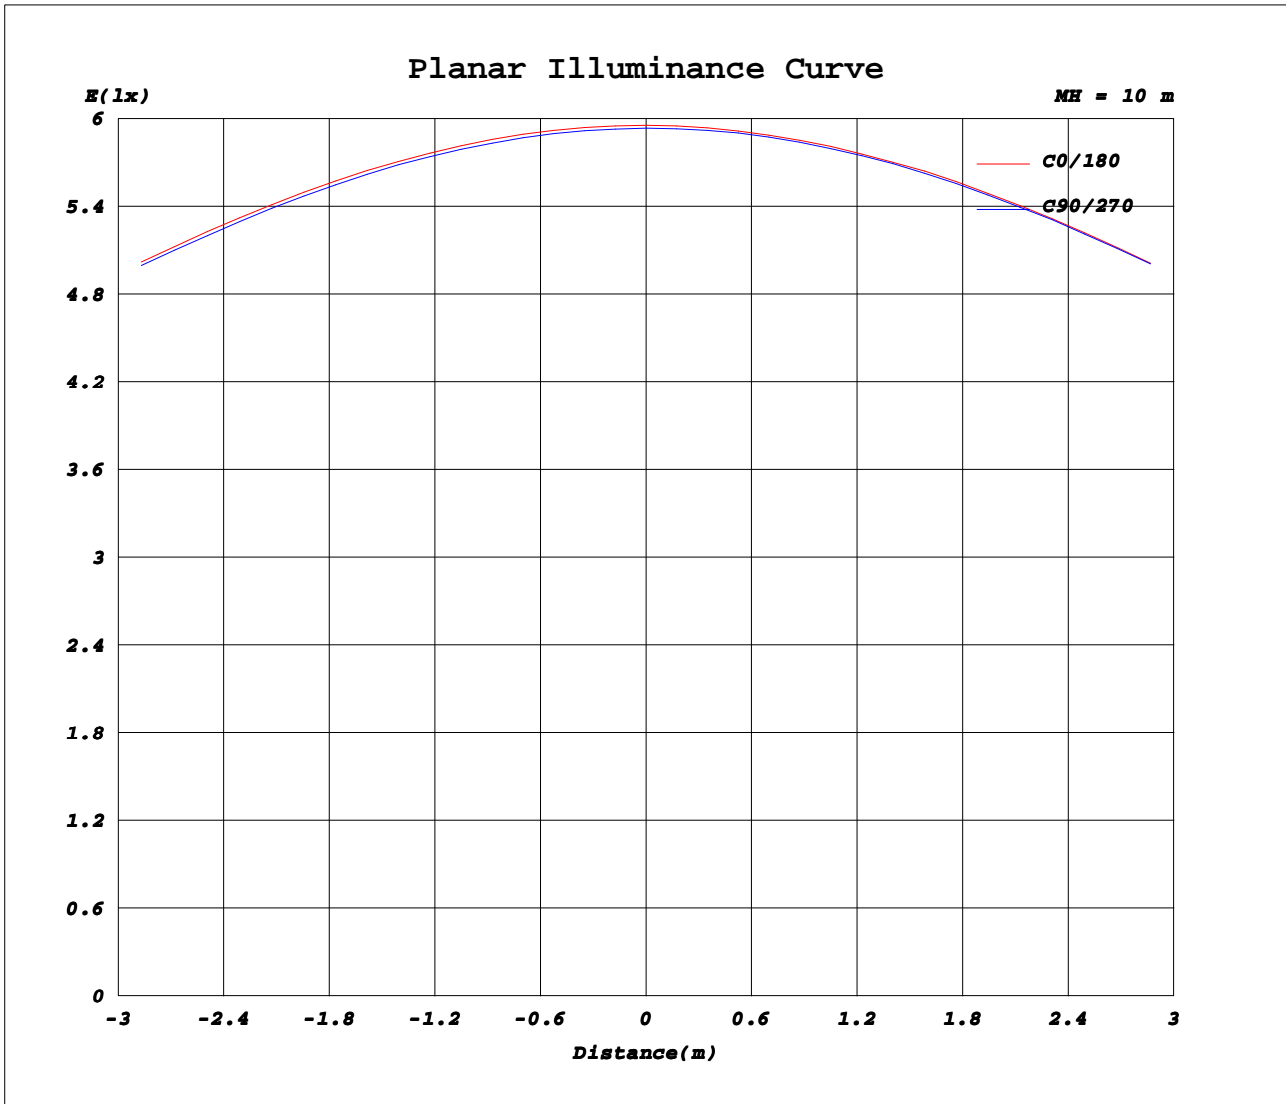

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.0630A P:14.600W PF:0.9700 Freq:50.00Hz Lamp Flux:1742.54x1 lm		
Name: NS44-φ220MM-15W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D220*H50mm	
	SUR.: D180mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	595	595	594	593	593	593	595	595	594	593	593	593							
5	593	592	591	590	589	589	592	591	591	591	591	590							
10	584	582	582	581	580	579	583	582	582	582	582	582							
15	569	568	567	566	565	564	568	568	567	567	568	568							
20	548	547	547	545	544	543	548	547	547	547	548	548							
25	523	520	521	518	518	515	520	521	519	521	521	523							
30	493	490	491	488	488	485	490	491	489	492	491	494							
35	459	456	457	454	453	451	457	458	456	458	458	460							
40	421	419	420	417	416	413	419	420	419	421	421	423							
45	380	379	379	377	375	373	380	380	380	381	382	384							
50	338	336	338	334	334	331	338	338	338	339	340	342							
55	295	293	294	290	290	288	294	295	293	296	296	299							
60	249	248	248	247	245	242	249	250	249	251	252	254							
65	204	203	203	201	200	199	205	205	204	206	207	209							
70	160	159	159	158	157	155	161	162	161	162	163	166							
75	120	120	119	119	117	115	121	121	120	122	123	125							
80	84.5	85.8	84.2	83.3	82.1	81.2	85.3	85.8	84.8	86.4	87.4	89.4							
85	54.6	54.8	56.5	55.8	54.8	50.4	55.7	54.7	56.2	57.2	58.4	55.0							
90	33.1	28.3	33.6	35.4	34.1	26.3	33.9	28.7	34.7	35.6	36.5	31.4							
95	19.8	9.48	12.9	17.6	10.5	14.5	20.5	13.7	10.3	14.3	9.26	14.7							
100	3.78	3.75	6.78	4.92	7.45	5.97	11.9	6.03	7.34	6.63	8.79	4.85							
105	4.45	4.29	5.02	5.18	4.48	4.37	5.43	5.41	5.79	5.62	5.47	5.36							
110	6.26	5.30	5.00	4.87	5.09	5.56	6.48	6.30	6.03	5.89	6.07	6.81							
115	5.69	5.41	5.37	5.41	5.44	5.45	6.52	6.43	6.42	6.40	6.37	6.50							
120	6.01	5.91	5.90	5.94	5.97	5.99	7.05	6.95	6.91	6.89	6.85	6.84							
125	6.52	6.43	6.43	6.49	6.50	6.53	7.56	7.44	7.41	7.37	7.35	7.32							
130	7.03	6.96	6.96	7.03	7.02	7.06	8.02	7.92	7.89	7.87	7.83	7.80							
135	7.52	7.44	7.43	7.52	7.50	7.56	8.47	8.36	8.32	8.32	8.26	8.23							
140	7.96	7.91	7.86	7.97	7.94	8.03	8.87	8.77	8.72	8.73	8.66	8.62							
145	8.37	8.33	8.25	8.36	8.33	8.44	9.20	9.13	9.03	9.05	9.01	8.96							
150	8.74	8.72	8.65	8.72	8.73	8.87	9.50	9.47	9.33	9.33	9.30	9.27							
155	9.12	9.10	9.09	9.15	9.12	9.26	9.77	9.74	9.62	9.62	9.58	9.53							
160	9.47	9.45	9.44	9.53	9.48	9.63	9.99	9.94	9.92	9.88	9.89	9.75							
165	9.78	9.79	9.84	9.88	9.85	9.97	10.2	10.1	10.2	10.2	10.1	9.97							
170	10.00	10.1	10.2	10.2	10.2	10.3	10.3	10.4	10.3	10.3	10.3	10.2							
175	10.4	10.5	10.5	10.4	10.5	10.6	10.5	10.6	10.5	10.4	10.5	10.4							
180	10.5	10.6	10.6	10.5	10.6	10.6	10.6	10.6	10.6	10.5	10.6	10.6							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: