
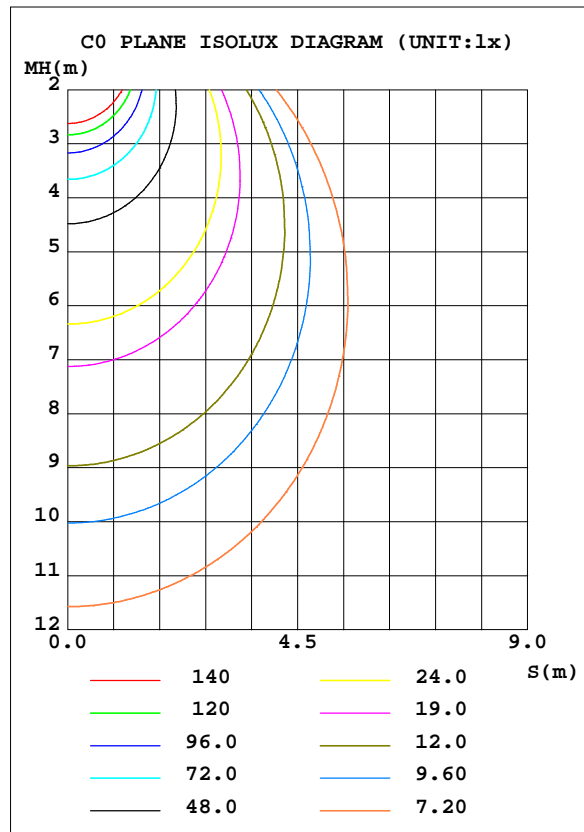


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.80V I:0.0980A P:21.100W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2790.52x1 lm		
Name: NS44-φ275MM-20W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 132.25 lm/W			
MODEL		I _{max} (cd)	964.2	S/MH(C0/180)	1.23
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2790.5	η UP, DN(C0-180)	1.5,48.7
NOMINAL FLUX(lm)	2790.52	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.6,48.2
LAMPS INSIDE	1	η up(%)	3.1	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221.6	η down(%)	96.9	CIBSE SHR MAX	1.35

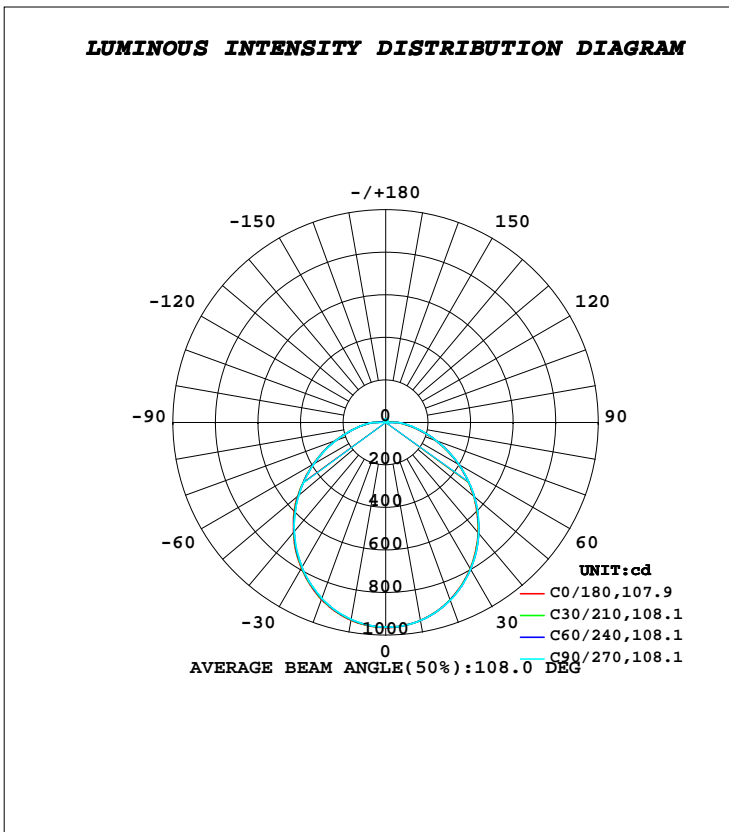

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	944.9	945.0	944.9	944.6	943.8	941.3	939.5	941.1	0- 10	90.98	90.98	3.26,3.26
20	886.7	888.3	888.6	887.3	885.1	881.6	879.4	881.6	10- 20	259.0	350.0	12.5,12.5
30	794.3	797.3	798.1	795.7	792.2	788.5	786.4	788.8	20- 30	388.0	738.0	26.4,26.4
40	676.1	679.6	680.8	678.5	674.9	671.0	668.5	670.7	30- 40	460.6	1199	43,43
50	540.2	544.0	545.7	544.0	541.0	536.8	533.8	535.5	40- 50	470.0	1669	59.8,59.8
60	395.0	398.7	400.1	397.8	394.5	391.7	390.1	391.5	50- 60	417.9	2087	74.8,74.8
70	251.6	254.7	256.0	254.3	251.8	250.0	248.9	249.6	60- 70	319.3	2406	86.2,86.2
80	130.0	133.0	134.7	134.3	133.3	133.6	133.6	132.2	70- 80	200.0	2606	93.4,93.4
90	52.59	53.48	54.36	55.49	56.06	54.49	52.72	52.30	80- 90	98.37	2704	96.9,96.9
100	6.131	4.984	6.034	11.37	15.83	12.51	7.905	6.335	90-100	26.18	2730	97.8,97.8
110	8.718	7.840	7.753	9.044	10.36	10.16	9.580	9.159	100-110	8.824	2739	98.2,98.2
120	9.551	9.295	9.449	10.32	11.19	11.35	11.14	10.51	110-120	9.609	2749	98.5,98.5
130	11.24	11.02	11.18	11.99	12.78	12.88	12.64	12.08	120-130	9.999	2759	98.9,98.9
140	12.76	12.53	12.65	13.41	14.15	14.20	13.95	13.46	130-140	9.829	2769	99.2,99.2
150	14.04	13.86	13.96	14.58	15.18	15.19	14.95	14.57	140-150	8.771	2777	99.5,99.5
160	15.33	15.23	15.30	15.70	16.08	16.04	15.85	15.62	150-160	6.965	2784	99.8,99.8
170	16.28	16.33	16.42	16.59	16.73	16.74	16.67	16.51	160-170	4.562	2789	99.9,99.9
180	17.04	16.97	16.95	17.01	17.06	17.00	16.93	16.96	170-180	1.597	2791	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.80V I:0.0980A P:21.100W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2790.52x1 lm		
Name: NS44-φ275MM-20W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

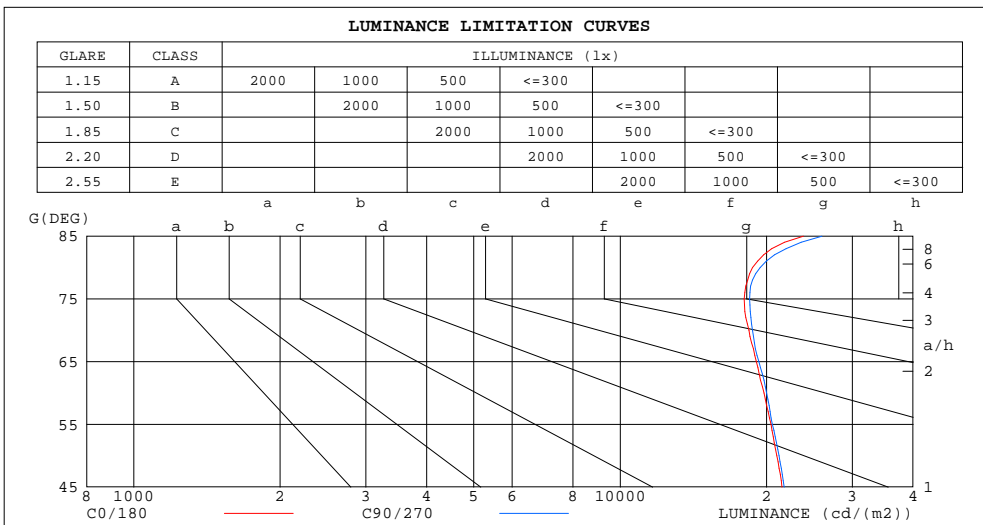

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	23793	25974
80	18720	19394
75	17988	18464
70	18387	18711
65	19062	19286
60	19750	20005
55	20417	20566
50	21009	21222
45	21508	21745


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.80V I:0.0980A P:21.100W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2790.52x1 lm		
Name: NS44-φ275MM-20W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.02	.98	.94	.90	.96	.92	.95	.91	.88	.90	.88	.85	.86	.84	.82	.80
2.0	.89	.82	.76	.87	.80	.75	.83	.77	.73	.79	.75	.71	.76	.72	.69	.66
3.0	.78	.70	.63	.76	.69	.62	.73	.66	.61	.70	.64	.59	.67	.62	.58	.56
4.0	.69	.60	.54	.68	.59	.53	.65	.58	.52	.62	.56	.51	.60	.54	.50	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.49	.44	.54	.48	.43	.41
6.0	.56	.47	.40	.55	.46	.40	.52	.45	.39	.50	.44	.39	.49	.43	.38	.36
7.0	.51	.42	.36	.50	.41	.35	.48	.40	.35	.46	.39	.34	.44	.38	.34	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.36	.31	.42	.36	.31	.41	.35	.30	.28
9.0	.42	.34	.29	.42	.34	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

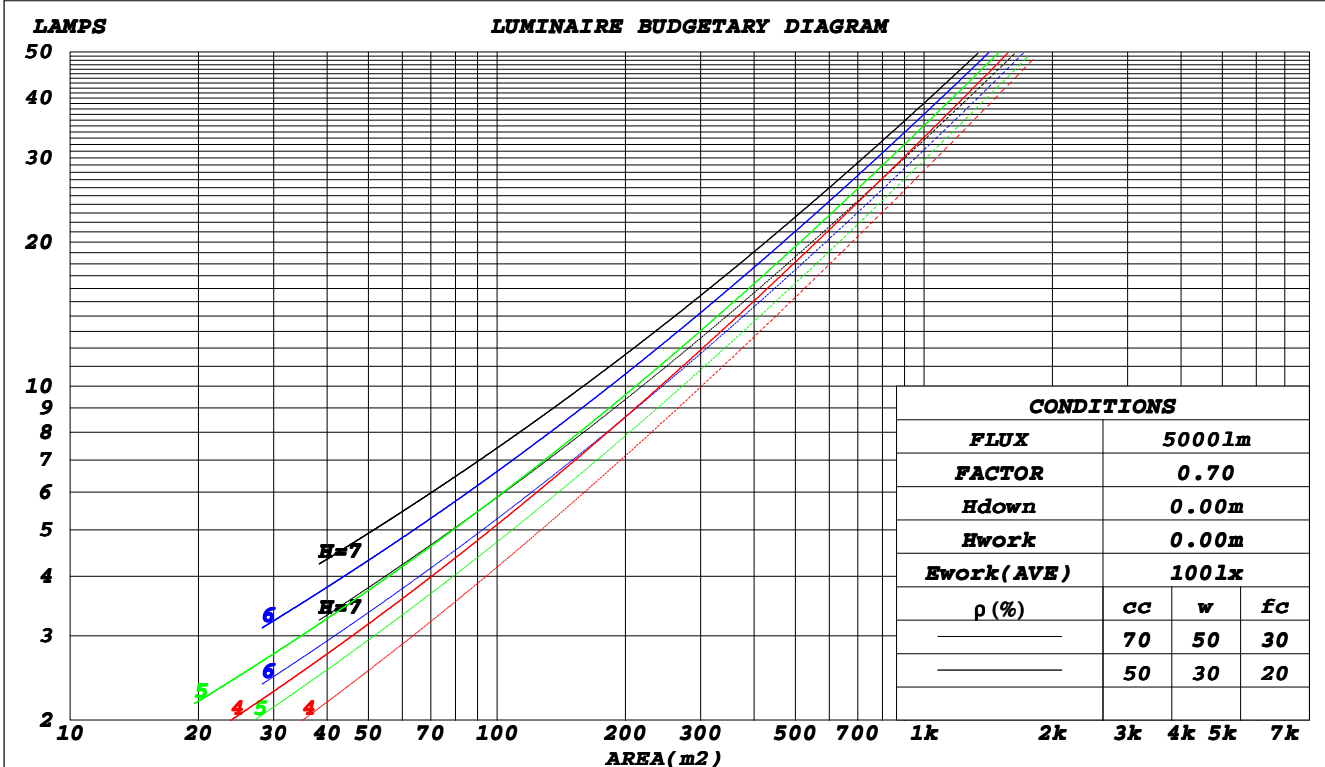

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.80V I:0.0980A P:21.100W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2790.52x1 lm		
Name: NS44-φ275MM-20W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.326	.185	.059	.317	.181	.058	.302	.173	.055	.288	.166	.053	.276	.160	.052	
2.0	.298	.164	.050	.291	.160	.049	.278	.155	.048	.266	.149	.047	.254	.144	.045	
3.0	.273	.145	.044	.267	.143	.043	.255	.138	.042	.244	.134	.041	.234	.129	.040	
4.0	.251	.130	.038	.245	.128	.038	.234	.124	.037	.224	.121	.036	.215	.117	.036	
5.0	.231	.118	.034	.226	.116	.034	.216	.113	.033	.208	.110	.033	.199	.106	.032	
6.0	.214	.107	.031	.209	.106	.030	.201	.103	.030	.193	.100	.029	.185	.098	.029	
7.0	.199	.098	.028	.195	.097	.028	.187	.094	.027	.180	.092	.027	.173	.090	.026	
8.0	.185	.091	.025	.182	.089	.025	.175	.087	.025	.168	.085	.025	.162	.083	.024	
9.0	.173	.084	.023	.170	.083	.023	.164	.081	.023	.158	.079	.023	.153	.077	.022	
10.0	.163	.078	.022	.160	.077	.022	.154	.076	.021	.149	.074	.021	.144	.072	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.214	.214	.214	.183	.183	.183	.125	.125	.125	.072	.072	.072	.023	.023	.023	
1.0	.205	.180	.157	.176	.154	.135	.120	.106	.093	.069	.061	.054	.022	.020	.018	
2.0	.197	.156	.121	.169	.134	.105	.116	.093	.073	.067	.054	.043	.021	.017	.014	
3.0	.189	.138	.098	.162	.119	.085	.111	.083	.060	.064	.048	.035	.021	.016	.011	
4.0	.181	.125	.082	.156	.108	.071	.107	.075	.050	.062	.044	.030	.020	.014	.010	
5.0	.174	.115	.071	.149	.099	.062	.103	.069	.044	.060	.041	.026	.019	.013	.009	
6.0	.167	.107	.063	.143	.092	.055	.099	.065	.039	.057	.038	.023	.018	.012	.008	
7.0	.160	.100	.058	.137	.086	.050	.095	.061	.036	.055	.036	.021	.018	.012	.007	
8.0	.153	.094	.053	.132	.081	.046	.091	.057	.033	.053	.034	.020	.017	.011	.006	
9.0	.147	.089	.050	.127	.077	.043	.088	.054	.031	.051	.032	.018	.017	.011	.006	
10.0	.141	.085	.047	.122	.074	.041	.085	.052	.029	.049	.031	.017	.016	.010	.006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.80V I:0.0980A P:21.100W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2790.52x1 lm		
Name: NS44-φ275MM-20W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.1	24.6	23.4	24.8	25.1	23.1	24.6	23.4	24.9	25.1
3H	24.6	26.0	24.9	26.3	26.6	24.7	26.0	25.0	26.3	26.6
4H	25.3	26.6	25.6	26.9	27.2	25.3	26.6	25.7	26.9	27.3
6H	25.9	27.1	26.2	27.4	27.8	25.9	27.2	26.3	27.5	27.8
8H	26.1	27.3	26.5	27.6	28.0	26.2	27.4	26.6	27.8	28.1
12H	26.4	27.5	26.8	27.9	28.2	26.5	27.7	26.9	28.0	28.4
4H 2H	23.7	25.0	24.0	25.3	25.6	23.7	25.0	24.1	25.3	25.6
3H	25.4	26.5	25.8	26.9	27.3	25.4	26.6	25.8	26.9	27.3
4H	26.2	27.3	26.6	27.6	28.0	26.3	27.3	26.7	27.7	28.1
6H	26.9	27.9	27.4	28.3	28.7	27.0	28.0	27.5	28.4	28.8
8H	27.3	28.2	27.8	28.6	29.0	27.4	28.3	27.9	28.7	29.1
12H	27.6	28.4	28.1	28.9	29.4	27.8	28.6	28.3	29.0	29.5
8H 4H	26.5	27.4	27.0	27.8	28.3	26.6	27.4	27.0	27.9	28.3
6H	27.5	28.2	28.0	28.7	29.2	27.5	28.3	28.0	28.7	29.2
8H	27.9	28.6	28.5	29.1	29.6	28.0	28.7	28.6	29.2	29.7
12H	28.4	29.0	29.0	29.5	30.1	28.6	29.2	29.1	29.7	30.2
12H 4H	26.6	27.4	27.0	27.8	28.3	26.6	27.4	27.1	27.9	28.3
6H	27.6	28.2	28.1	28.7	29.2	27.7	28.3	28.2	28.8	29.3
8H	28.1	28.7	28.7	29.2	29.7	28.2	28.8	28.8	29.3	29.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 2791 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.6)
 Area: 0.04 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.80V I:0.0980A P:21.100W PF:0.9700 Freq:50.00Hz Lamp Flux:2790.52x1 lm		
Name: NS44-φ275MM-20W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	54	44	38	31
0.80	66	55	47	65	54	47	63	53	47	39
1.00	75	63	56	73	63	56	71	64	55	47
1.25	82	71	63	80	70	63	77	68	62	54
1.50	86	76	69	85	75	68	81	73	67	59
2.00	93	84	78	91	83	77	87	80	75	66
2.50	97	89	83	95	87	82	91	84	79	70
3.00	101	93	87	98	91	86	94	88	84	74
4.00	105	98	93	102	96	92	97	93	89	79
5.00	107	102	97	104	100	96	99	96	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.80V I:0.0980A P:21.100W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2790.52x1 lm		
Name: NS44-φ275MM-20W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

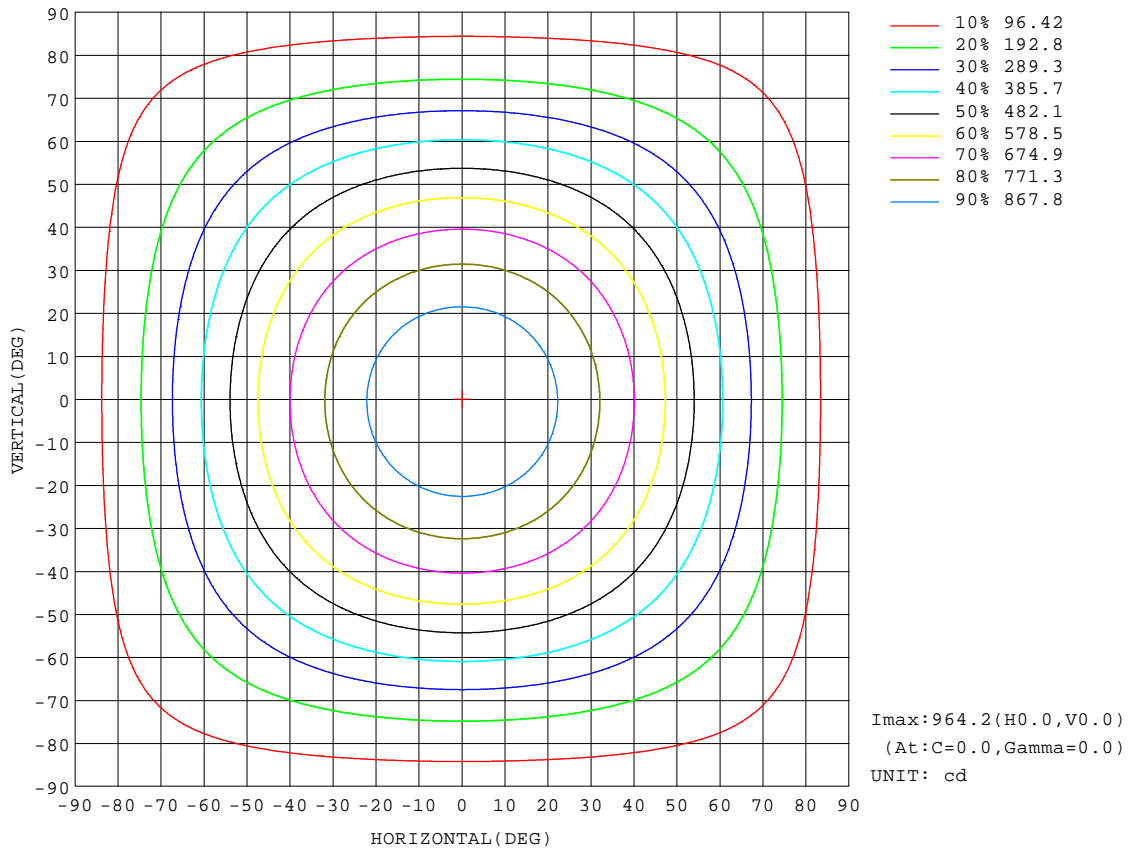


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.80V I:0.0980A P:21.100W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2790.52x1 lm		
Name: NS44-φ275MM-20W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

Flux out:1845 lm

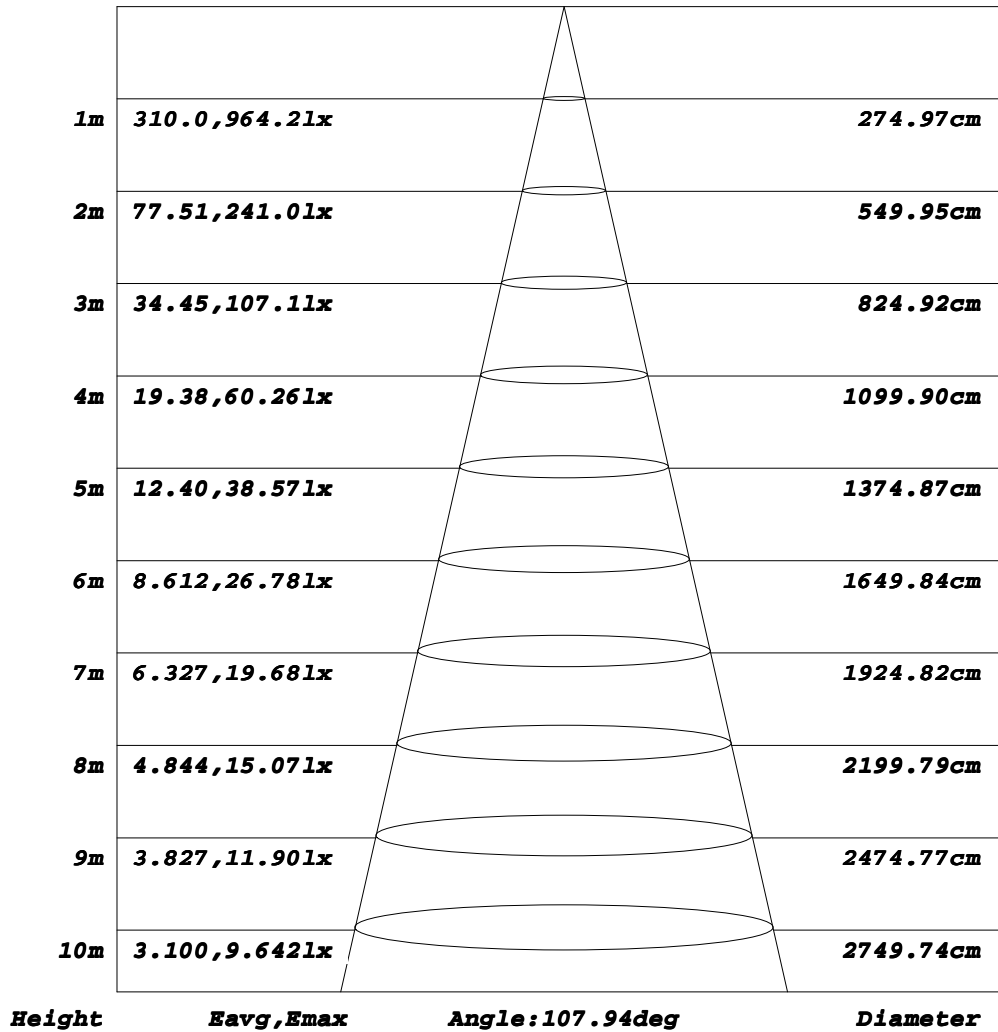


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.80V I:0.0980A P:21.100W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2790.52x1 lm		
Name: NS44-φ275MM-20W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

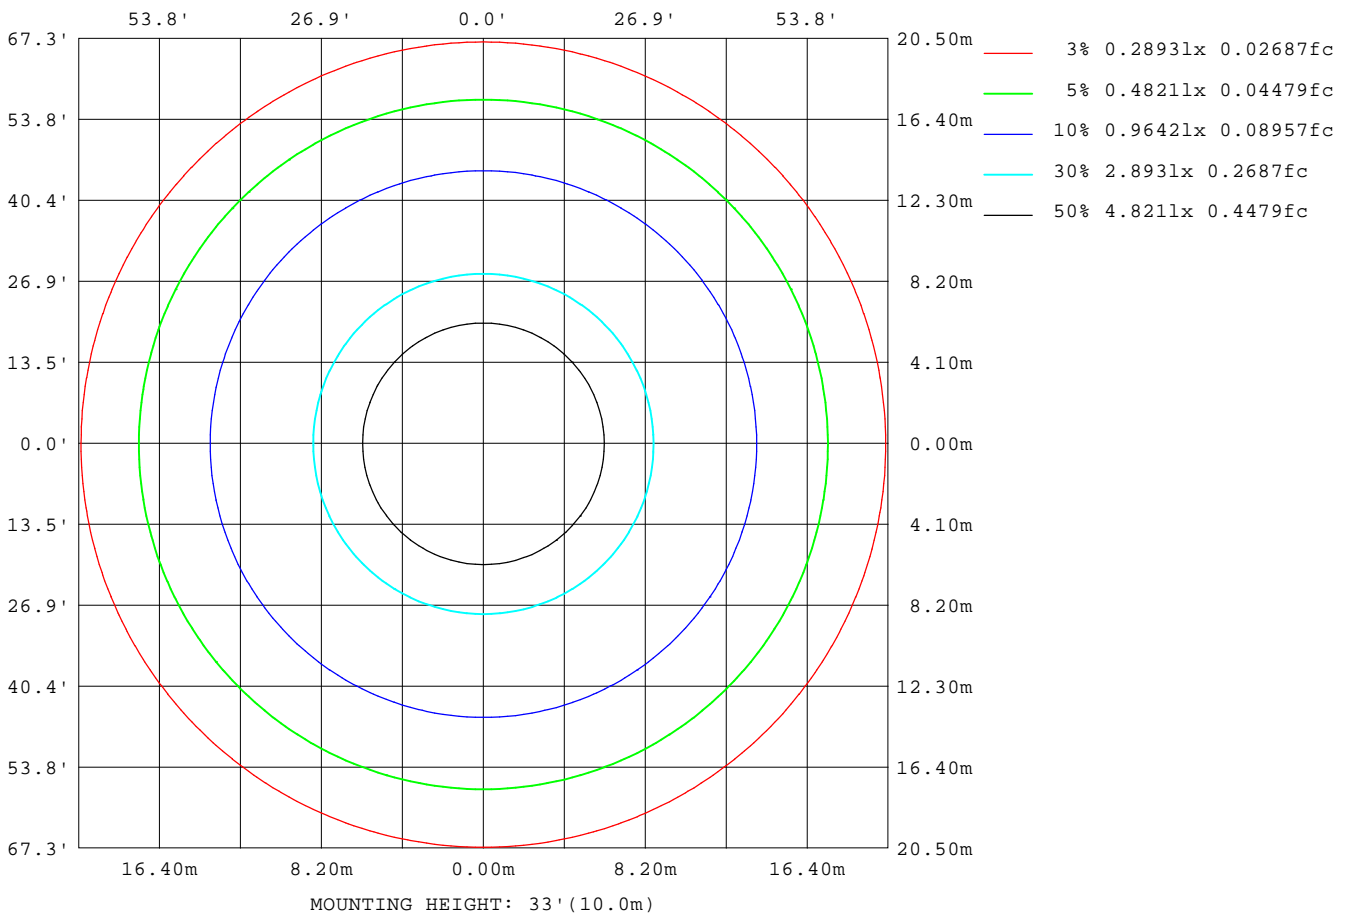

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

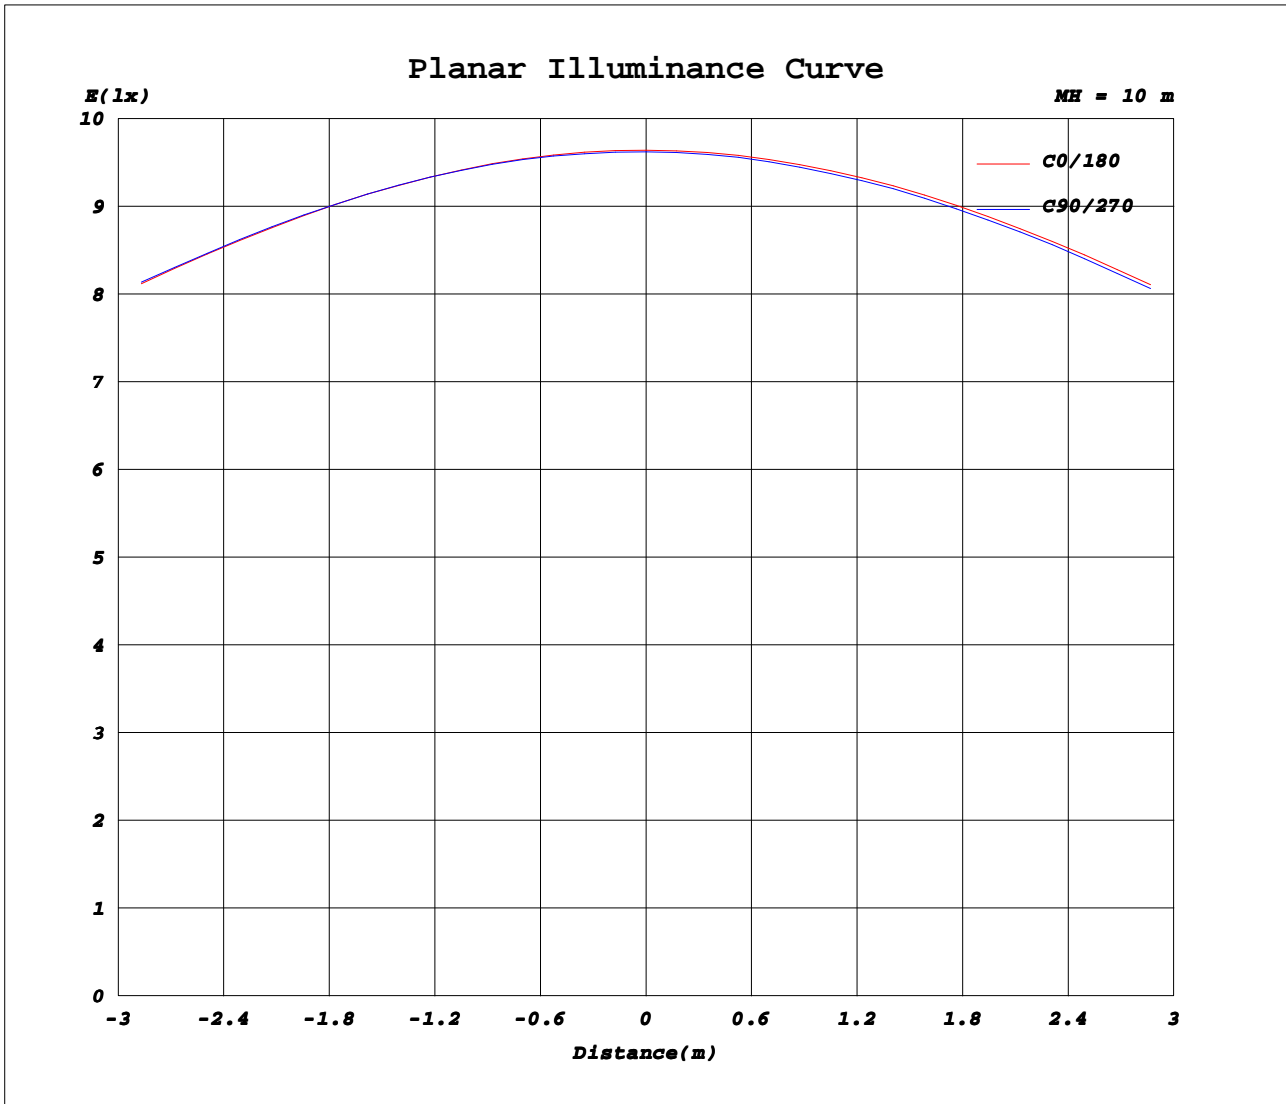

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.80V I:0.0980A P:21.100W PF:0.9700 Freq:50.00Hz		
Lamp Flux:2790.52x1 lm		
Name: NS44-φ275MM-20W(ROUND)	Type: LED	
MFR.: Lumega Group	DIM.: D275*H50mm	
	SUR.: D230mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	964	963	963	962	963	964	964	964	963	962	963	963							
5	960	959	959	959	959	959	959	957	956	956	956	957							
10	945	945	945	945	945	944	944	942	941	940	940	942							
15	920	921	922	922	921	920	919	917	915	914	915	917							
20	887	888	889	889	888	887	885	883	881	879	880	883							
25	844	846	847	847	846	844	842	839	837	836	838	840							
30	794	797	798	798	797	795	792	790	787	786	787	790							
35	738	741	742	743	742	740	737	734	732	730	731	734							
40	676	679	680	681	680	677	675	672	670	669	669	672							
45	608	612	614	615	615	613	611	608	605	603	603	605							
50	540	543	545	546	545	543	541	538	536	534	534	537							
55	468	471	472	472	471	469	467	465	463	463	463	465							
60	395	398	400	400	399	397	394	392	391	390	391	392							
65	322	324	326	326	325	324	322	321	319	319	319	320							
70	252	254	255	256	255	254	252	250	249	249	249	250							
75	186	189	190	191	191	190	188	187	186	185	185	186							
80	130	132	134	135	135	134	133	134	134	134	133	132							
85	82.9	86.8	89.3	90.6	89.4	87.7	86.2	88.0	89.9	91.3	90.0	87.2							
90	52.6	53.2	53.8	54.4	55.2	55.8	56.1	55.1	53.9	52.7	52.3	52.3							
95	22.9	16.3	13.0	13.1	20.1	27.9	33.7	27.9	20.1	13.1	13.0	16.2							
100	6.13	5.00	4.97	6.03	9.56	13.2	15.8	14.0	11.0	7.91	6.63	6.04							
105	7.64	7.05	6.81	6.91	7.63	8.49	9.26	9.34	9.19	8.88	8.56	8.15							
110	8.72	8.00	7.68	7.75	8.57	9.52	10.4	10.3	10.0	9.58	9.30	9.01							
115	8.73	8.46	8.43	8.64	9.34	10.1	10.8	10.9	10.7	10.4	9.98	9.43							
120	9.55	9.31	9.28	9.45	10.0	10.6	11.2	11.4	11.3	11.1	10.8	10.3							
125	10.4	10.2	10.1	10.3	10.9	11.5	12.0	12.1	12.1	11.9	11.5	11.0							
130	11.2	11.0	11.0	11.2	11.7	12.3	12.8	12.9	12.9	12.6	12.3	11.8							
135	12.0	11.8	11.8	12.0	12.5	13.0	13.5	13.6	13.6	13.4	13.0	12.6							
140	12.8	12.5	12.5	12.7	13.1	13.7	14.2	14.2	14.2	13.9	13.7	13.3							
145	13.4	13.2	13.2	13.3	13.8	14.3	14.7	14.8	14.7	14.5	14.2	13.9							
150	14.0	13.9	13.8	14.0	14.4	14.8	15.2	15.2	15.1	15.0	14.7	14.4							
155	14.7	14.5	14.5	14.6	14.9	15.3	15.6	15.7	15.6	15.4	15.2	15.0							
160	15.3	15.2	15.2	15.3	15.6	15.8	16.1	16.1	16.0	15.8	15.7	15.5							
165	15.9	15.9	15.9	16.0	16.1	16.3	16.5	16.5	16.4	16.4	16.2	16.1							
170	16.3	16.3	16.4	16.4	16.5	16.6	16.7	16.8	16.7	16.7	16.6	16.4							
175	16.8	16.8	16.8	16.8	16.8	16.9	16.9	16.9	16.8	16.8	16.8	16.8							
180	17.0	17.0	17.0	16.9	17.0	17.0	17.1	17.0	17.0	16.9	16.9	17.0							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: