
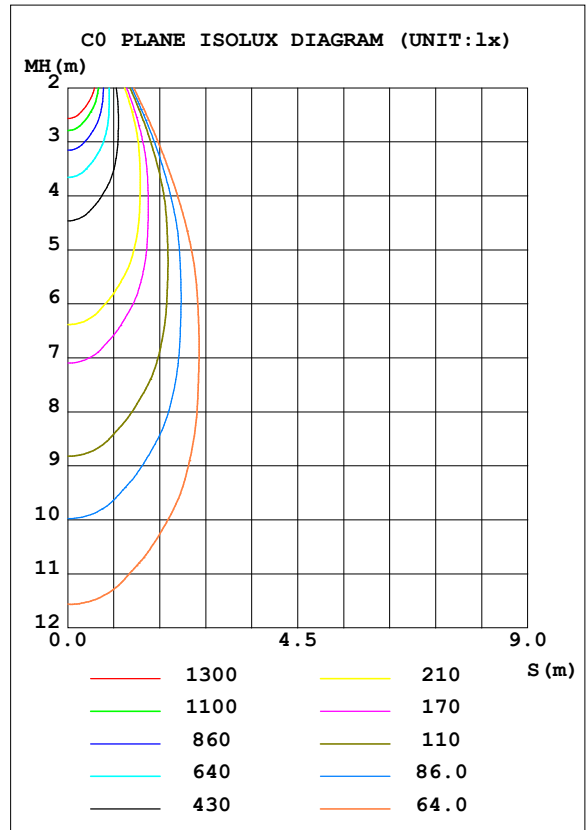


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.40V I:0.1480A P:29.400W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3847.93x1 lm		
Name: NS73-30W	Type: LED	
MFR.: Lumega		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 130.88 lm/W			
MODEL		I _{max} (cd)	8554	S/MH (C0/180)	0.62
NOMINAL POWER (W)	30	LOR (%)	100.0	S/MH (C90/270)	0.63
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	3847.9	η UP, DN (C0-180)	0.3, 49.0
NOMINAL FLUX (lm)	3847.93	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 50.0
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	99.0	CIBSE SHR MAX	0.65

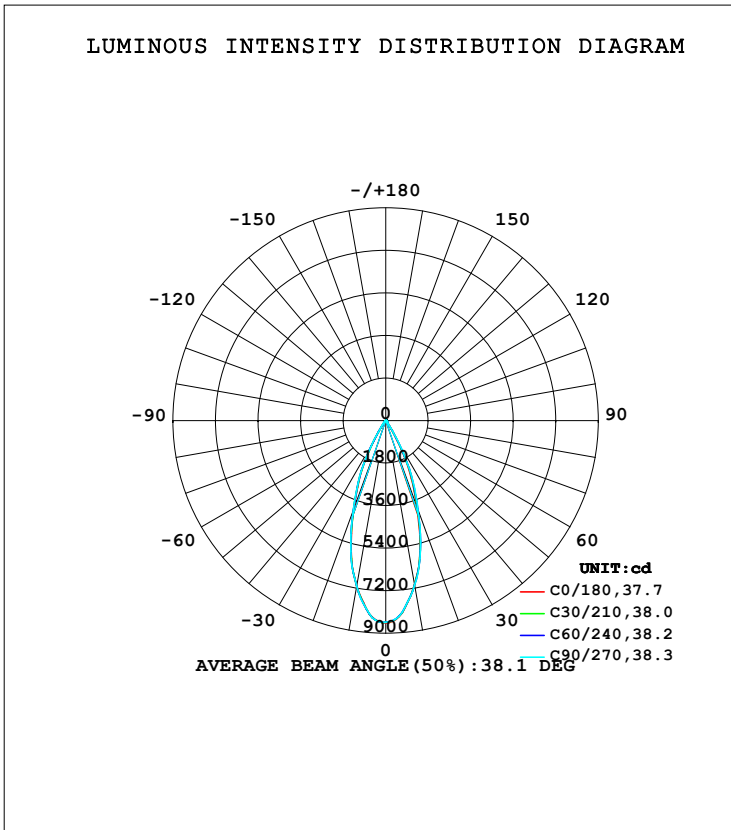

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	7038	7050	7065	7086	7103	7103	7093	7071	0- 10	742.9	742.9	19.3,19.3
20	3841	3936	3989	3974	3950	3990	4015	3954	10- 20	1547	2290	59.5,59.5
30	1026	1121	1181	1182	1177	1235	1267	1183	20- 30	1143	3432	89.2,89.2
40	108.0	133.4	145.5	134.3	123.6	146.4	165.3	147.6	30- 40	259.9	3692	96,96
50	40.95	44.92	47.51	47.64	47.85	52.32	55.17	50.45	40- 50	62.60	3755	97.6,97.6
60	15.59	15.93	16.46	17.28	18.19	19.35	19.84	18.37	50- 60	27.33	3782	98.3,98.3
70	7.422	6.913	7.374	9.514	11.69	12.33	11.99	10.24	60- 70	12.85	3795	98.6,98.6
80	2.089	1.561	2.458	5.879	9.243	9.934	9.092	6.352	70- 80	8.073	3803	98.8,98.8
90	0.7010	0	0.6345	4.467	8.314	9.195	8.372	5.395	80- 90	5.077	3808	99,99
100	1.866	0.8919	1.765	5.859	9.975	10.93	10.07	6.891	90-100	5.805	3814	99.1,99.1
110	3.299	2.304	3.188	7.354	11.53	12.45	11.53	8.326	100-110	7.214	3821	99.3,99.3
120	4.255	3.306	4.157	8.159	12.16	12.97	12.03	8.994	110-120	7.942	3829	99.5,99.5
130	4.369	3.600	4.301	7.579	10.85	11.47	10.67	8.199	120-130	7.264	3836	99.7,99.7
140	3.972	3.513	3.949	5.957	7.955	8.339	7.846	6.327	130-140	5.343	3842	99.8,99.8
150	3.652	3.477	3.649	4.430	5.208	5.368	5.185	4.586	140-150	3.269	3845	99.9,99.9
160	3.392	3.366	3.387	3.493	3.596	3.598	3.559	3.490	150-160	1.834	3847	100,100
170	2.759	2.734	2.744	2.822	2.887	2.831	2.759	2.745	160-170	0.8962	3848	100,100
180	2.527	2.478	2.456	2.478	2.510	2.522	2.529	2.530	170-180	0.2521	3848	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.40V I:0.1480A P:29.400W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3847.93x1 lm		
Name: NS73-30W	Type: LED	
MFR.: Lumega		

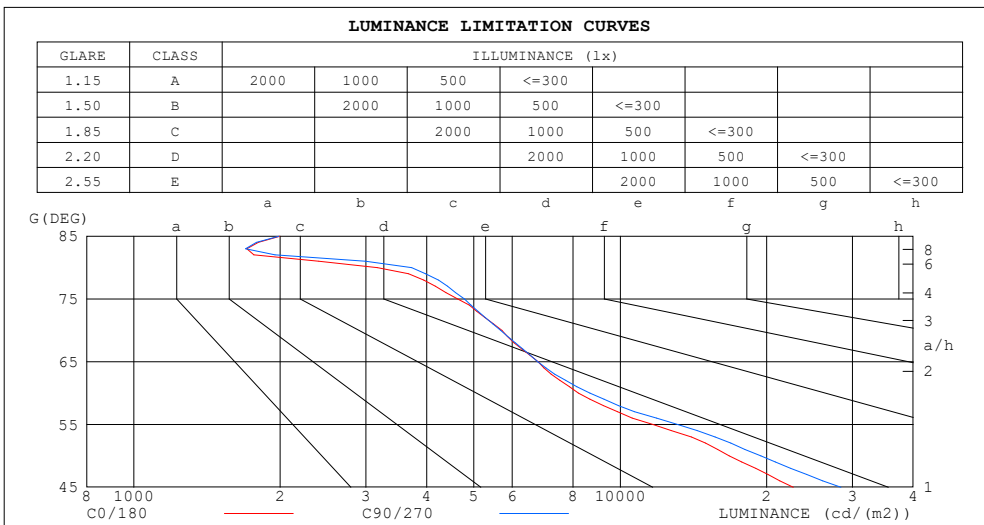

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1997	1987
80	3167	3725
75	4632	4782
70	5710	5674
65	6775	6773
60	8208	8661
55	11682	13120
50	16763	19451
45	22672	28438


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.40V I:0.1480A P:29.400W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3847.93x1 lm		
Name: NS73-30W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.12	1.09	1.07	1.09	1.07	1.06	1.05	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.05	1.02	.99	1.03	1.00	.97	.99	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.95	.92	.98	.94	.91	.95	.92	.89	.93	.90	.88	.91	.88	.86	.85
4.0	.94	.90	.86	.93	.89	.85	.91	.87	.84	.89	.86	.83	.87	.84	.82	.81
5.0	.90	.85	.81	.89	.84	.81	.87	.83	.80	.85	.82	.79	.84	.81	.78	.77
6.0	.86	.81	.77	.85	.80	.77	.83	.79	.76	.82	.78	.75	.81	.77	.75	.74
7.0	.82	.77	.73	.81	.76	.73	.80	.76	.73	.79	.75	.72	.77	.74	.72	.70
8.0	.78	.73	.70	.78	.73	.70	.77	.72	.69	.76	.72	.69	.75	.71	.69	.67
9.0	.75	.70	.67	.74	.70	.67	.74	.69	.66	.73	.69	.66	.72	.68	.66	.65
10.0	.72	.67	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.69	.66	.63	.62

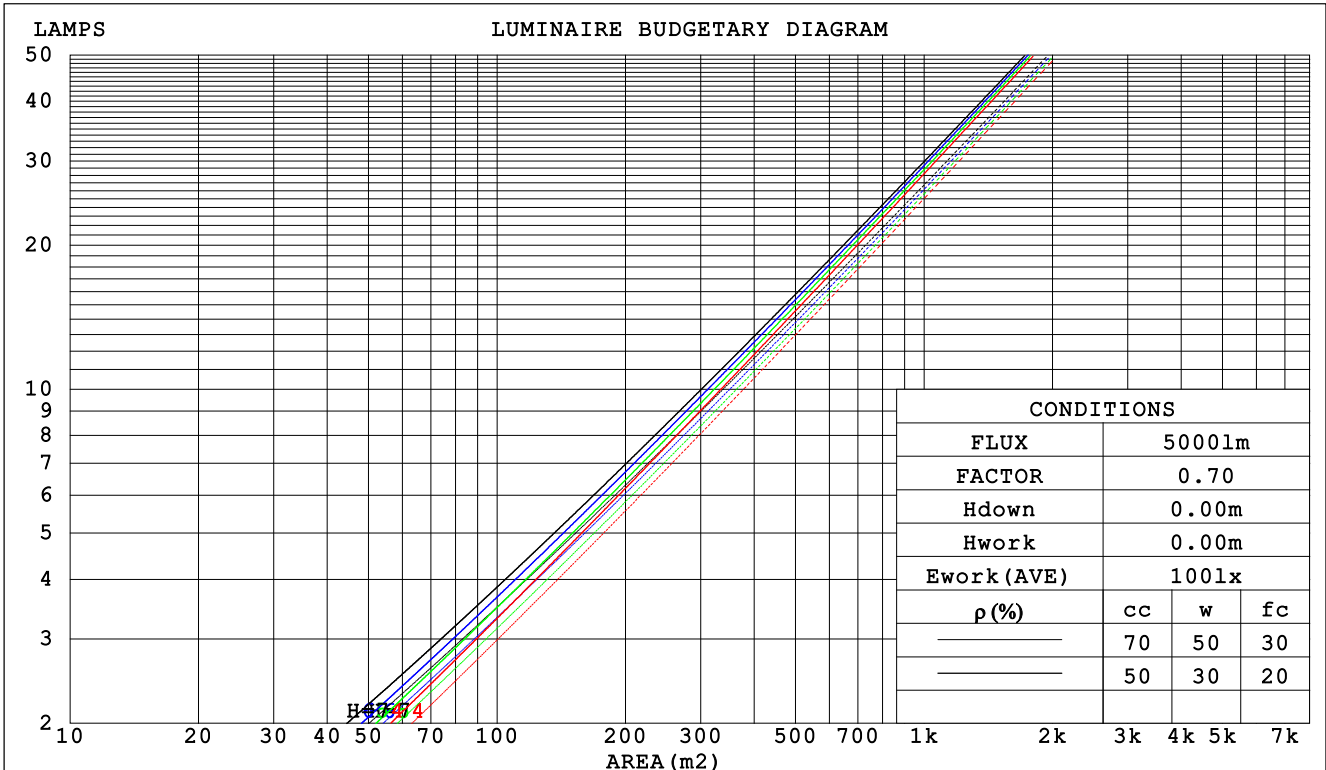

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.40V I:0.1480A P:29.400W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3847.93x1 lm		
Name: NS73-30W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.159	.090	.029	.152	.086	.027	.139	.079	.025	.127	.073	.023	.115	.067	.022	
2.0	.149	.082	.025	.143	.079	.024	.132	.073	.023	.122	.068	.021	.113	.064	.020	
3.0	.140	.074	.022	.135	.072	.022	.126	.068	.021	.117	.064	.020	.109	.060	.019	
4.0	.132	.069	.020	.128	.067	.020	.120	.064	.019	.113	.060	.018	.106	.057	.017	
5.0	.125	.064	.018	.122	.062	.018	.115	.060	.018	.108	.057	.017	.102	.055	.016	
6.0	.119	.060	.017	.116	.059	.017	.110	.056	.016	.104	.054	.016	.099	.052	.015	
7.0	.114	.056	.016	.111	.055	.016	.106	.053	.015	.101	.052	.015	.096	.050	.015	
8.0	.109	.053	.015	.106	.052	.015	.101	.051	.014	.097	.049	.014	.093	.048	.014	
9.0	.104	.050	.014	.102	.050	.014	.098	.048	.014	.094	.047	.013	.090	.046	.013	
10.0	.100	.048	.013	.098	.047	.013	.094	.046	.013	.091	.045	.013	.087	.044	.013	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.198	.198	.198	.170	.170	.170	.116	.116	.116	.066	.066	.066	.021	.021	.021	
1.0	.178	.165	.154	.152	.142	.133	.104	.098	.092	.060	.057	.053	.019	.018	.017	
2.0	.161	.141	.123	.138	.121	.107	.095	.084	.074	.055	.049	.044	.017	.016	.014	
3.0	.147	.121	.101	.126	.105	.087	.087	.073	.061	.050	.043	.036	.016	.014	.012	
4.0	.136	.106	.084	.117	.092	.073	.080	.064	.051	.046	.038	.030	.015	.012	.010	
5.0	.127	.095	.071	.109	.082	.062	.075	.057	.044	.043	.034	.026	.014	.011	.009	
6.0	.118	.085	.061	.102	.074	.053	.070	.051	.038	.041	.030	.022	.013	.010	.007	
7.0	.111	.077	.053	.096	.067	.046	.066	.047	.033	.038	.028	.019	.012	.009	.006	
8.0	.105	.071	.047	.091	.061	.041	.063	.043	.029	.037	.025	.017	.012	.008	.006	
9.0	.100	.065	.042	.086	.057	.036	.060	.040	.026	.035	.023	.015	.011	.008	.005	
10.0	.095	.061	.038	.082	.053	.033	.057	.037	.023	.033	.022	.014	.011	.007	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.40V I:0.1480A P:29.400W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3847.93x1 lm		
Name: NS73-30W	Type: LED	
MFR.: Lumega		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.6	16.4	15.9	16.6	16.8	16.8	17.6	17.0	17.8	17.9
3H	15.6	16.3	15.9	16.5	16.7	16.7	17.5	17.0	17.7	17.9
4H	15.6	16.3	15.9	16.5	16.7	16.7	17.4	17.0	17.6	17.9
6H	15.5	16.2	15.8	16.4	16.7	16.6	17.3	16.9	17.5	17.8
8H	15.5	16.1	15.8	16.4	16.6	16.6	17.2	16.9	17.5	17.8
12H	15.4	16.0	15.8	16.3	16.6	16.6	17.2	16.9	17.4	17.7
4H 2H	15.5	16.2	15.8	16.4	16.6	16.6	17.3	16.9	17.5	17.8
3H	15.5	16.1	15.8	16.4	16.7	16.6	17.2	16.9	17.5	17.8
4H	15.5	16.0	15.8	16.3	16.7	16.5	17.1	16.9	17.4	17.7
6H	15.4	15.9	15.8	16.3	16.6	16.5	17.0	16.9	17.3	17.7
8H	15.4	15.8	15.8	16.2	16.6	16.4	16.9	16.8	17.3	17.6
12H	15.3	15.7	15.7	16.1	16.5	16.4	16.8	16.8	17.2	17.6
8H 4H	15.4	15.8	15.8	16.2	16.6	16.4	16.9	16.8	17.2	17.6
6H	15.3	15.7	15.8	16.1	16.5	16.4	16.7	16.8	17.1	17.6
8H	15.3	15.6	15.7	16.0	16.5	16.3	16.6	16.8	17.1	17.5
12H	15.2	15.5	15.7	15.9	16.4	16.3	16.5	16.7	17.0	17.5
12H 4H	15.3	15.7	15.7	16.1	16.5	16.4	16.8	16.8	17.2	17.6
6H	15.3	15.6	15.7	16.0	16.5	16.3	16.6	16.8	17.1	17.5
8H	15.2	15.5	15.7	15.9	16.4	16.3	16.5	16.7	17.0	17.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.0 / - 3.4					+ 2.8 / - 4.1				
1.5H	+ 3.2 / - 2.6					+ 4.3 / - 3.2				
2.0H	+ 2.8 / - 2.5					+ 3.4 / - 2.9				

CIE Pub.117, 3848 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.7)
 Area: 0.0038 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.40V I:0.1480A P:29.400W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3847.93x1 lm		
Name: NS73-30W	Type: LED	
MFR.: Lumega		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	79	89	83	79	88	82	79	76
0.80	96	91	87	95	90	87	94	90	87	83
1.00	100	95	91	99	94	91	98	94	91	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	105	103	106	103	101	95
3.00	112	109	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	108	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.40V I:0.1480A P:29.400W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3847.93x1 lm		
Name: NS73-30W	Type: LED	
MFR.: Lumega		

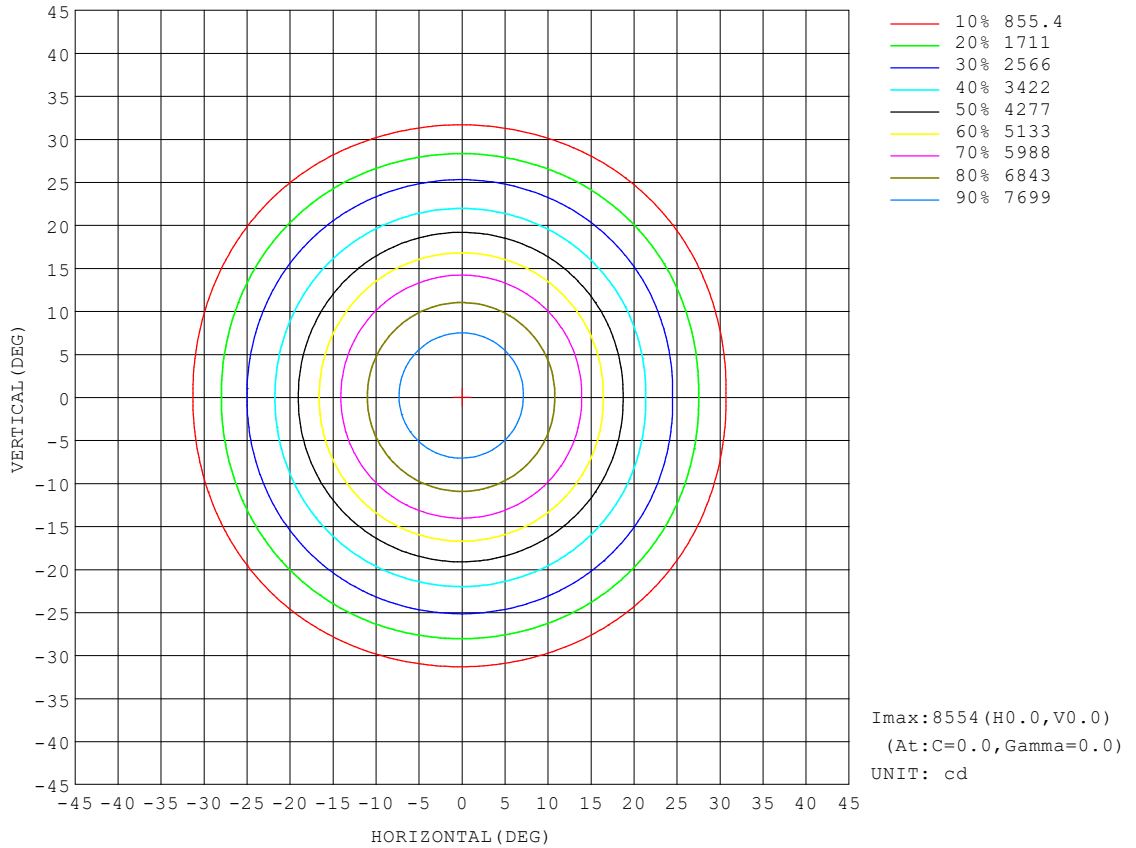


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.40V I:0.1480A P:29.400W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3847.93x1 lm		
Name: NS73-30W	Type: LED	
MFR.: Lumega		

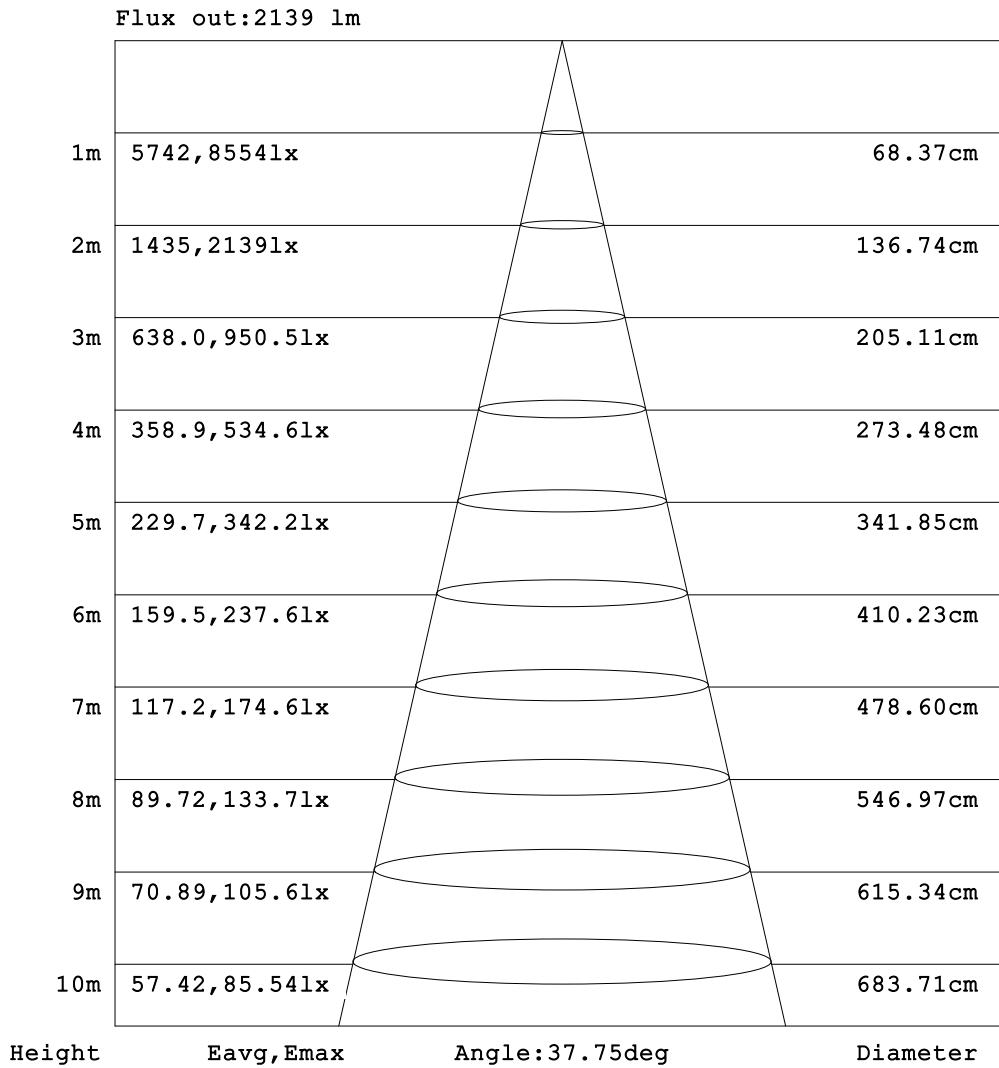


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.40V I:0.1480A P:29.400W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3847.93x1 lm		
Name: NS73-30W	Type: LED	
MFR.: Lumega		

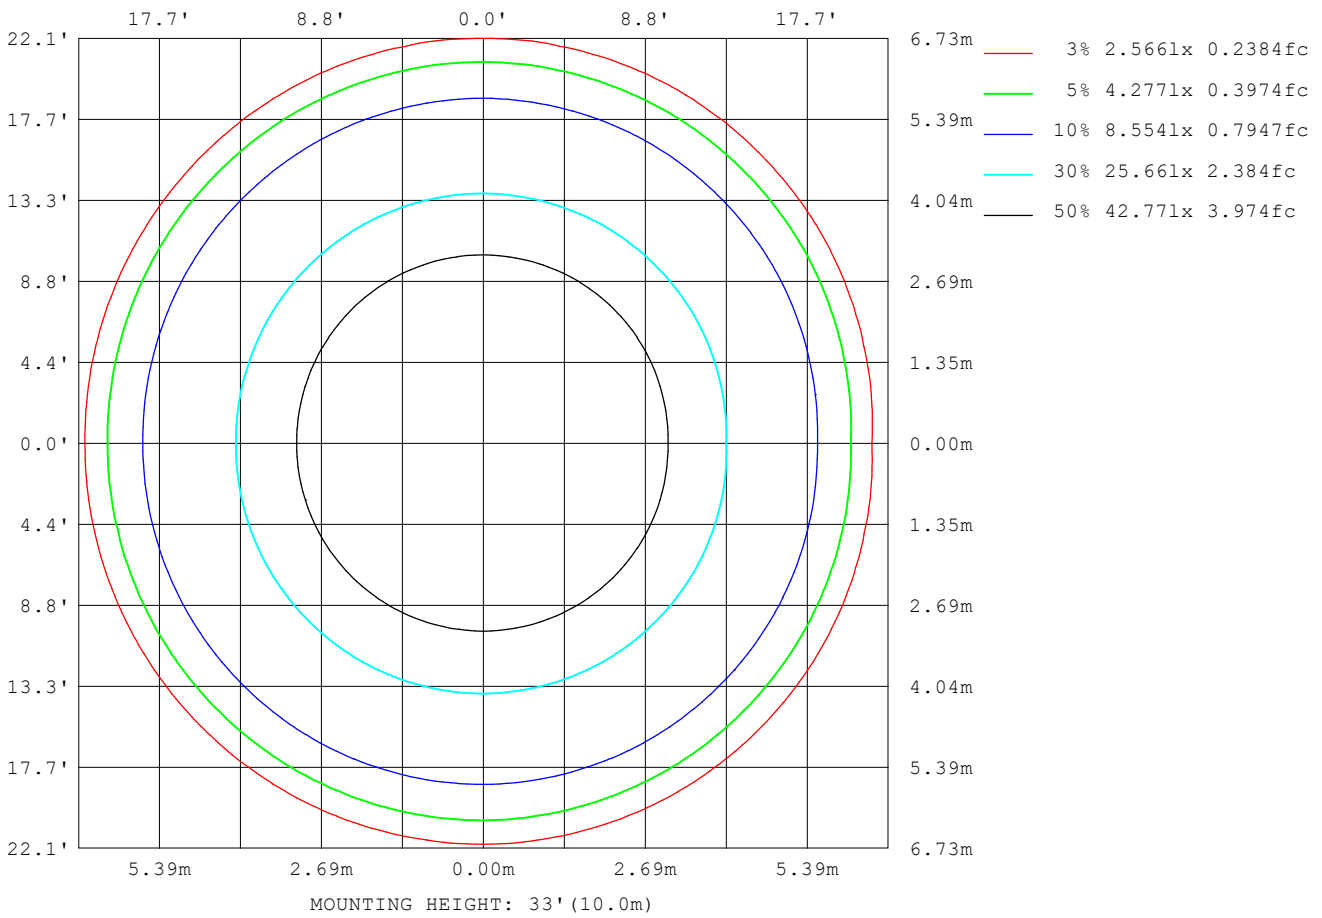

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

Planar Illuminance Curve

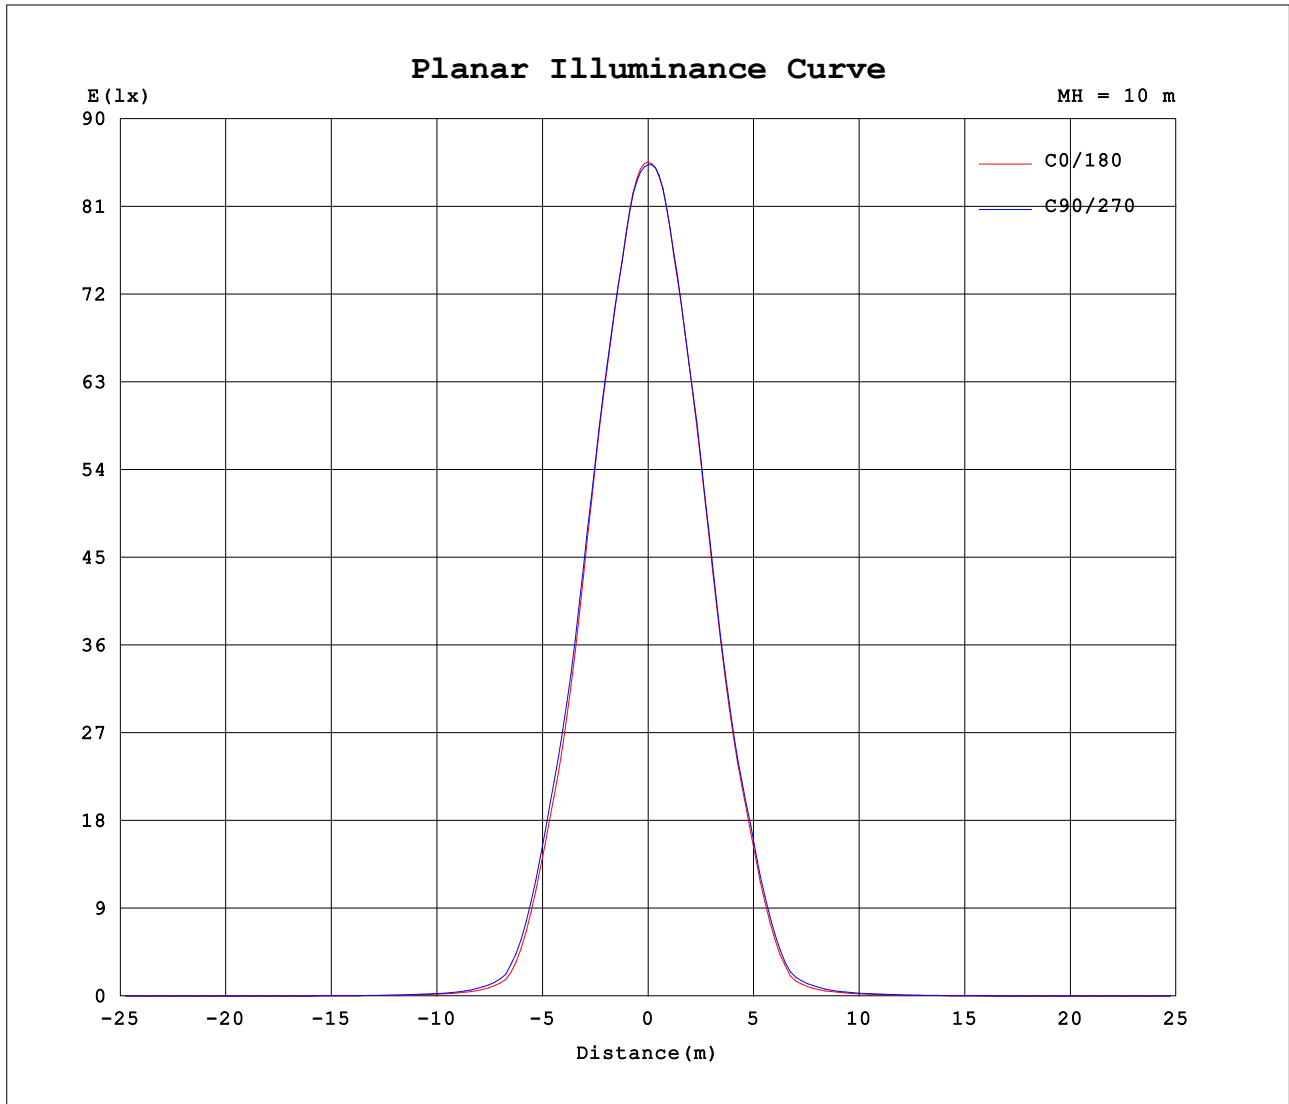

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.40V I:0.1480A P:29.400W PF:0.9730 Freq:50.00Hz		
Lamp Flux:3847.93x1 lm		
Name: NS73-30W	Type: LED	
MFR.: Lumega		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	8554	8539	8531	8528	8536	8546	8554	8546	8536	8528	8531	8539							
5	8153	8139	8134	8136	8154	8174	8193	8198	8197	8191	8182	8170							
10	7038	7046	7055	7065	7079	7093	7103	7105	7102	7093	7080	7062							
15	5627	5660	5684	5699	5700	5696	5693	5707	5720	5724	5706	5674							
20	3841	3911	3961	3989	3983	3966	3950	3977	4003	4015	3983	3925							
25	2433	2520	2582	2617	2610	2590	2569	2598	2625	2636	2598	2531							
30	1026	1095	1147	1181	1185	1180	1177	1218	1253	1267	1224	1143							
35	248	288	315	328	316	299	286	312	340	358	342	305							
40	108	127	140	146	139	130	124	138	154	165	157	138							
45	60.9	68.5	73.6	76.4	74.5	71.9	70.5	78.0	85.6	90.5	86.2	76.3							
50	40.9	43.8	46.0	47.5	47.7	47.6	47.8	50.9	53.7	55.2	52.8	48.1							
55	25.5	26.7	27.7	28.6	29.2	29.7	30.2	31.6	32.6	32.9	31.5	29.1							
60	15.6	15.8	16.1	16.5	17.0	17.6	18.2	19.0	19.7	19.8	19.1	17.7							
65	10.9	10.5	10.5	10.9	11.8	12.9	13.9	14.6	14.9	14.7	14.0	12.7							
70	7.42	6.92	6.91	7.37	8.74	10.3	11.7	12.3	12.4	12.0	11.0	9.48							
75	4.56	4.00	4.05	4.70	6.49	8.47	10.3	10.9	10.9	10.3	9.05	7.13							
80	2.09	1.50	1.62	2.46	4.67	7.09	9.24	9.96	9.91	9.09	7.52	5.19							
85	0.66	0.00	0.00	0.66	2.98	5.57	7.90	8.71	8.71	7.90	6.29	3.88							
90	0.70	0.00	0.00	0.63	3.09	5.84	8.31	9.19	9.21	8.37	6.67	4.12							
95	1.22	0.30	0.26	1.13	3.67	6.52	9.09	10.00	10.0	9.18	7.42	4.77							
100	1.87	0.91	0.87	1.76	4.39	7.33	9.97	10.9	11.0	10.1	8.26	5.52							
105	2.60	1.63	1.59	2.49	5.14	8.11	10.8	11.7	11.8	10.9	9.03	6.28							
110	3.30	2.32	2.29	3.19	5.86	8.85	11.5	12.5	12.4	11.5	9.70	6.95							
115	3.87	2.91	2.87	3.77	6.42	9.38	12.0	12.9	12.9	12.0	10.2	7.46							
120	4.26	3.32	3.29	4.16	6.73	9.59	12.2	13.0	12.9	12.0	10.3	7.70							
125	4.41	3.54	3.52	4.32	6.72	9.39	11.8	12.5	12.5	11.6	9.98	7.59							
130	4.37	3.61	3.59	4.30	6.41	8.75	10.8	11.5	11.4	10.7	9.25	7.15							
135	4.18	3.57	3.56	4.15	5.89	7.82	9.54	10.1	10.0	9.36	8.19	6.46							
140	3.97	3.52	3.51	3.95	5.24	6.68	7.96	8.36	8.32	7.85	6.97	5.68							
145	3.79	3.50	3.49	3.78	4.63	5.58	6.43	6.70	6.68	6.38	5.80	4.94							
150	3.65	3.48	3.48	3.65	4.15	4.71	5.21	5.37	5.36	5.18	4.84	4.33							
155	3.56	3.50	3.50	3.58	3.78	4.02	4.22	4.30	4.30	4.22	4.08	3.86							
160	3.39	3.37	3.37	3.39	3.46	3.53	3.60	3.61	3.59	3.56	3.52	3.46							
165	3.08	3.06	3.06	3.07	3.12	3.17	3.21	3.19	3.16	3.13	3.11	3.09							
170	2.76	2.74	2.73	2.74	2.80	2.85	2.89	2.85	2.81	2.76	2.74	2.74							
175	2.55	2.50	2.47	2.48	2.54	2.60	2.66	2.65	2.61	2.57	2.56	2.55							
180	2.53	2.49	2.47	2.46	2.47	2.49	2.51	2.52	2.53	2.53	2.53	2.53							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: