
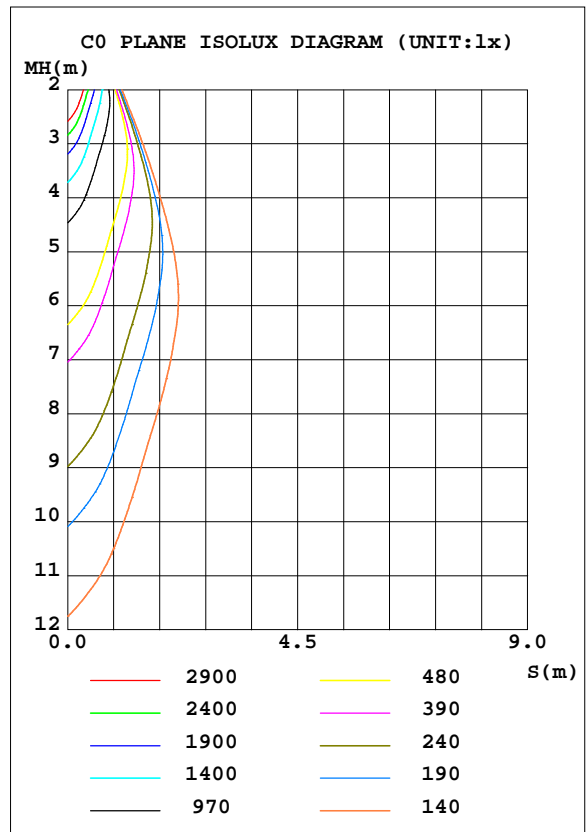


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.60V I:0.4090A P:88.300W PF:0.9780 Freq:50.00Hz		
Lamp Flux:7127.88x1 lm		
Name: NS94-88W	Type: LED	
MFR.: Lumega Group	DIM.: 210*210*135mm	
	SUR.: 185*185mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 80.72 lm/W			
MODEL		I _{max} (cd)	20379	S/MH(C0/180)	0.40
NOMINAL POWER(W)	88	LOR(%)	100.0	S/MH(C90/270)	0.55
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	7127.9	η UP, DN(C0-180)	1.4,51.6
NOMINAL FLUX(lm)	7127.88	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.7,45.4
LAMPS INSIDE	1	η up(%)	3.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	221.6	η down(%)	97.0	CIBSE SHR MAX	0.55

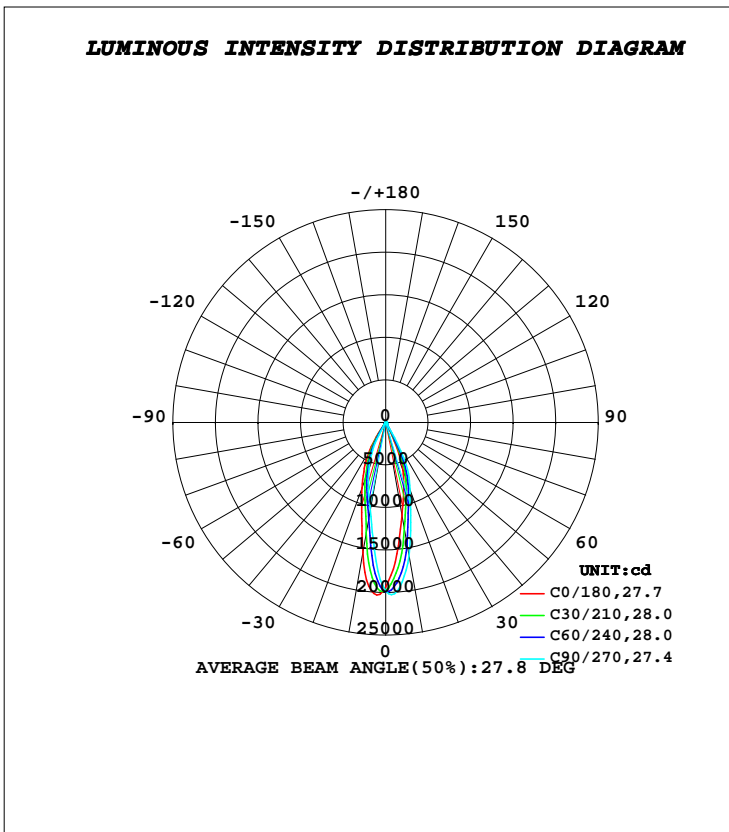

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1105	1359	1590	1585	1556	1238	1050	1046	0- 10	1525	1525	21.4,21.4
20	597.5	735.9	835.4	848.6	821.9	668.1	581.4	562.1	10- 20	2669	4194	58.8,58.8
30	45.47	85.18	212.2	345.4	381.6	256.0	118.4	62.84	20- 30	2006	6200	87,87
40	16.58	20.06	22.65	27.30	30.34	25.84	19.88	17.97	30- 40	405.1	6605	92.7,92.7
50	11.66	12.87	12.83	11.86	12.80	10.67	9.825	10.28	40- 50	122.2	6728	94.4,94.4
60	7.628	9.304	11.33	9.977	9.137	8.488	8.784	7.889	50- 60	93.70	6821	95.7,95.7
70	1.825	2.217	3.598	4.313	5.883	4.419	3.587	2.694	60- 70	61.14	6883	96.6,96.6
80	0.4248	0.5190	0.6998	0.8577	1.818	1.530	1.389	1.315	70- 80	20.94	6903	96.9,96.9
90	0.3227	0.2649	0.2909	0.3177	1.218	1.230	1.206	1.243	80- 90	9.287	6913	97,97
100	0.6421	0.5309	0.4432	0.4090	1.320	1.417	1.542	1.598	90-100	9.187	6922	97.1,97.1
110	1.320	1.093	0.8947	0.8087	1.732	1.859	2.004	2.078	100-110	12.75	6935	97.3,97.3
120	2.391	2.067	1.765	1.617	2.374	2.602	2.862	2.966	110-120	18.44	6953	97.5,97.5
130	3.947	3.446	2.997	2.797	3.407	3.721	4.057	4.209	120-130	25.96	6979	97.9,97.9
140	6.020	5.407	4.839	4.563	4.912	5.403	5.906	6.088	130-140	34.01	7013	98.4,98.4
150	8.137	7.545	7.018	6.745	7.053	7.553	7.925	8.050	140-150	40.24	7053	99,99
160	9.590	9.290	8.957	8.678	8.887	9.124	9.279	9.289	150-160	38.54	7092	99.5,99.5
170	10.07	10.04	9.809	9.525	9.674	9.543	9.299	9.298	160-170	26.72	7119	99.9,99.9
180	10.15	10.05	9.794	9.654	10.18	10.05	9.772	9.658	170-180	9.284	7128	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-06-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.60V I:0.4090A P:88.300W PF:0.9780 Freq:50.00Hz		
Lamp Flux:7127.88x1 lm		
Name: NS94-88W	Type: LED	
MFR.: Lumega Group	DIM.: 210*210*135mm	
	SUR.: 185*185mm	

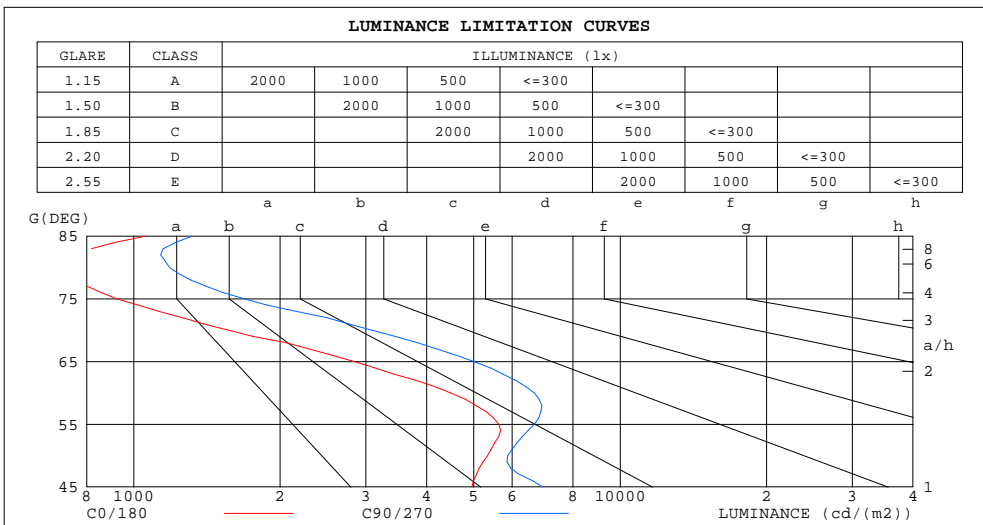


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.60V I:0.4090A P:88.300W PF:0.9780 Freq:50.00Hz		
Lamp Flux:7127.88x1 lm		
Name: NS94-88W	Type: LED	
MFR.: Lumega Group	DIM.: 210*210*135mm	
	SUR.: 185*185mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.11	1.09	1.07	1.08	1.06	1.05	1.04	1.02	1.01	.99	.98	.97	.96	.95	.94	.92
2.0	1.04	1.01	.98	1.02	.99	.96	.99	.96	.94	.95	.93	.91	.92	.91	.89	.87
3.0	.99	.94	.91	.97	.93	.90	.94	.91	.88	.91	.89	.86	.89	.87	.85	.83
4.0	.93	.89	.85	.92	.88	.84	.90	.86	.83	.87	.84	.82	.85	.83	.81	.79
5.0	.89	.84	.80	.88	.83	.80	.86	.82	.79	.84	.81	.78	.82	.79	.77	.76
6.0	.85	.80	.76	.84	.79	.76	.82	.78	.75	.81	.77	.74	.79	.76	.74	.72
7.0	.81	.76	.72	.80	.75	.72	.79	.75	.72	.77	.74	.71	.76	.73	.70	.69
8.0	.78	.73	.69	.77	.72	.69	.76	.71	.68	.75	.71	.68	.73	.70	.68	.66
9.0	.74	.70	.66	.74	.69	.66	.73	.69	.66	.72	.68	.65	.71	.67	.65	.64
10.0	.72	.67	.63	.71	.66	.63	.70	.66	.63	.69	.65	.63	.68	.65	.62	.61

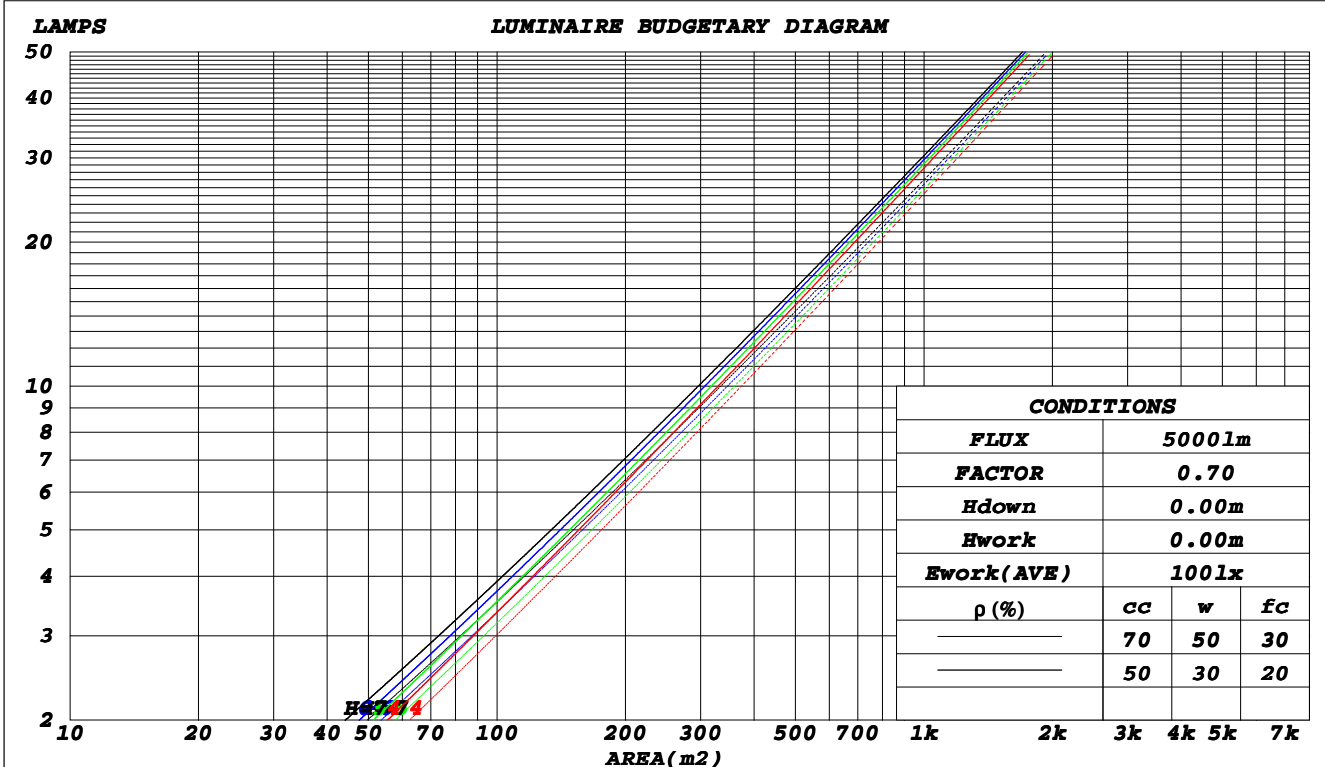

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-06-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.60V I:0.4090A P:88.300W PF:0.9780 Freq:50.00Hz		
Lamp Flux:7127.88x1 lm		
Name: NS94-88W	Type: LED	
MFR.: Lumega Group	DIM.: 210*210*135mm	
	SUR.: 185*185mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.162	.092	.029	.154	.088	.028	.140	.080	.026	.127	.073	.023	.115	.066	.021	
2.0	.151	.083	.025	.145	.080	.025	.133	.074	.023	.122	.068	.021	.112	.063	.020	
3.0	.142	.076	.023	.137	.073	.022	.126	.069	.021	.117	.064	.020	.108	.060	.019	
4.0	.134	.070	.020	.129	.068	.020	.120	.064	.019	.112	.060	.018	.104	.057	.017	
5.0	.127	.065	.019	.123	.063	.018	.115	.060	.018	.108	.057	.017	.101	.054	.016	
6.0	.120	.060	.017	.117	.059	.017	.110	.056	.016	.103	.054	.016	.097	.051	.015	
7.0	.114	.057	.016	.111	.055	.016	.105	.053	.015	.099	.051	.015	.094	.049	.014	
8.0	.109	.053	.015	.106	.052	.015	.101	.050	.014	.096	.048	.014	.091	.047	.014	
9.0	.104	.050	.014	.102	.050	.014	.097	.048	.014	.092	.046	.013	.088	.045	.013	
10.0	.100	.048	.013	.098	.047	.013	.093	.046	.013	.089	.044	.013	.085	.043	.012	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.213	.213	.213	.182	.182	.182	.125	.125	.125	.072	.072	.072	.023	.023	.023	
1.0	.193	.181	.169	.165	.155	.146	.113	.107	.101	.065	.062	.059	.021	.020	.019	
2.0	.177	.156	.138	.151	.134	.120	.104	.093	.083	.060	.054	.049	.019	.017	.016	
3.0	.163	.137	.116	.140	.118	.100	.096	.082	.070	.056	.048	.042	.018	.016	.014	
4.0	.152	.122	.099	.130	.105	.086	.090	.073	.061	.052	.043	.036	.017	.014	.012	
5.0	.142	.110	.086	.122	.095	.075	.084	.067	.053	.049	.039	.031	.016	.013	.010	
6.0	.134	.101	.076	.115	.087	.066	.080	.061	.047	.046	.036	.028	.015	.012	.009	
7.0	.127	.093	.069	.109	.080	.060	.076	.056	.042	.044	.033	.025	.014	.011	.008	
8.0	.121	.086	.062	.104	.075	.054	.072	.053	.039	.042	.031	.023	.014	.010	.008	
9.0	.116	.081	.057	.100	.070	.050	.069	.049	.035	.040	.029	.021	.013	.010	.007	
10.0	.111	.076	.053	.096	.066	.046	.066	.047	.033	.039	.028	.020	.013	.009	.007	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-06-10

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.60V I:0.4090A P:88.300W PF:0.9780 Freq:50.00Hz		
Lamp Flux:7127.88x1 lm		
Name: NS94-88W	Type: LED	
MFR.: Lumega Group	DIM.: 210*210*135mm	
	SUR.: 185*185mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.2	11.0	10.4	11.2	11.4	11.8	12.6	12.0	12.8	13.0
3H	10.4	11.1	10.7	11.4	11.6	12.2	13.0	12.5	13.2	13.4
4H	10.4	11.1	10.7	11.3	11.6	12.3	12.9	12.6	13.2	13.5
6H	10.3	11.0	10.7	11.3	11.6	12.2	12.9	12.5	13.1	13.4
8H	10.3	10.9	10.6	11.2	11.5	12.2	12.8	12.5	13.1	13.4
12H	10.3	10.9	10.6	11.2	11.5	12.2	12.7	12.5	13.1	13.4
4H 2H	10.6	11.3	10.9	11.5	11.8	11.9	12.6	12.3	12.9	13.2
3H	10.8	11.4	11.2	11.7	12.0	12.4	13.0	12.8	13.3	13.6
4H	10.8	11.3	11.2	11.7	12.0	12.4	13.0	12.8	13.3	13.7
6H	10.7	11.2	11.2	11.6	12.0	12.4	12.9	12.8	13.3	13.7
8H	10.7	11.1	11.1	11.5	12.0	12.4	12.8	12.8	13.2	13.6
12H	10.7	11.1	11.1	11.5	12.0	12.3	12.7	12.8	13.2	13.6
8H 4H	10.7	11.1	11.1	11.5	12.0	12.3	12.7	12.7	13.1	13.6
6H	10.7	11.0	11.1	11.5	11.9	12.3	12.6	12.8	13.1	13.6
8H	10.6	11.0	11.1	11.4	11.9	12.3	12.6	12.8	13.1	13.6
12H	10.6	10.9	11.1	11.4	11.9	12.2	12.5	12.8	13.0	13.6
12H 4H	10.6	11.1	11.1	11.5	11.9	12.2	12.7	12.7	13.1	13.5
6H	10.6	10.9	11.1	11.4	11.9	12.2	12.5	12.7	13.0	13.5
8H	10.6	10.9	11.1	11.4	11.9	12.2	12.5	12.7	13.0	13.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.4 / - 0.6					+ 0.4 / - 0.6				
1.5H	+ 1.2 / - 1.1					+ 1.0 / - 1.2				
2.0H	+ 0.9 / - 1.7					+ 0.9 / - 1.6				

CIE Pub.117, 7128 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 6.8)
 Area: 0.034 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.60V I:0.4090A P:88.300W PF:0.9780 Freq:50.00Hz Lamp Flux:7127.88x1 lm		
Name: NS94-88W	Type: LED	
MFR.: Lumega Group	DIM.: 210*210*135mm	
	SUR.: 185*185mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	81	77	86	81	77	85	80	77	73
0.80	94	88	85	93	88	85	92	87	84	80
1.00	98	93	89	97	92	89	96	92	88	84
1.25	102	97	94	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	101	97	95	90
2.00	108	103	100	106	102	99	103	100	97	91
2.50	109	105	102	107	104	101	104	101	99	92
3.00	111	107	105	109	106	103	105	103	101	94
4.00	113	110	108	111	108	106	107	105	103	95
5.00	114	112	110	112	110	108	107	106	105	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.60V I:0.4090A P:88.300W PF:0.9780 Freq:50.00Hz		
Lamp Flux:7127.88x1 lm		
Name: NS94-88W	Type: LED	
MFR.: Lumega Group	DIM.: 210*210*135mm	
	SUR.: 185*185mm	

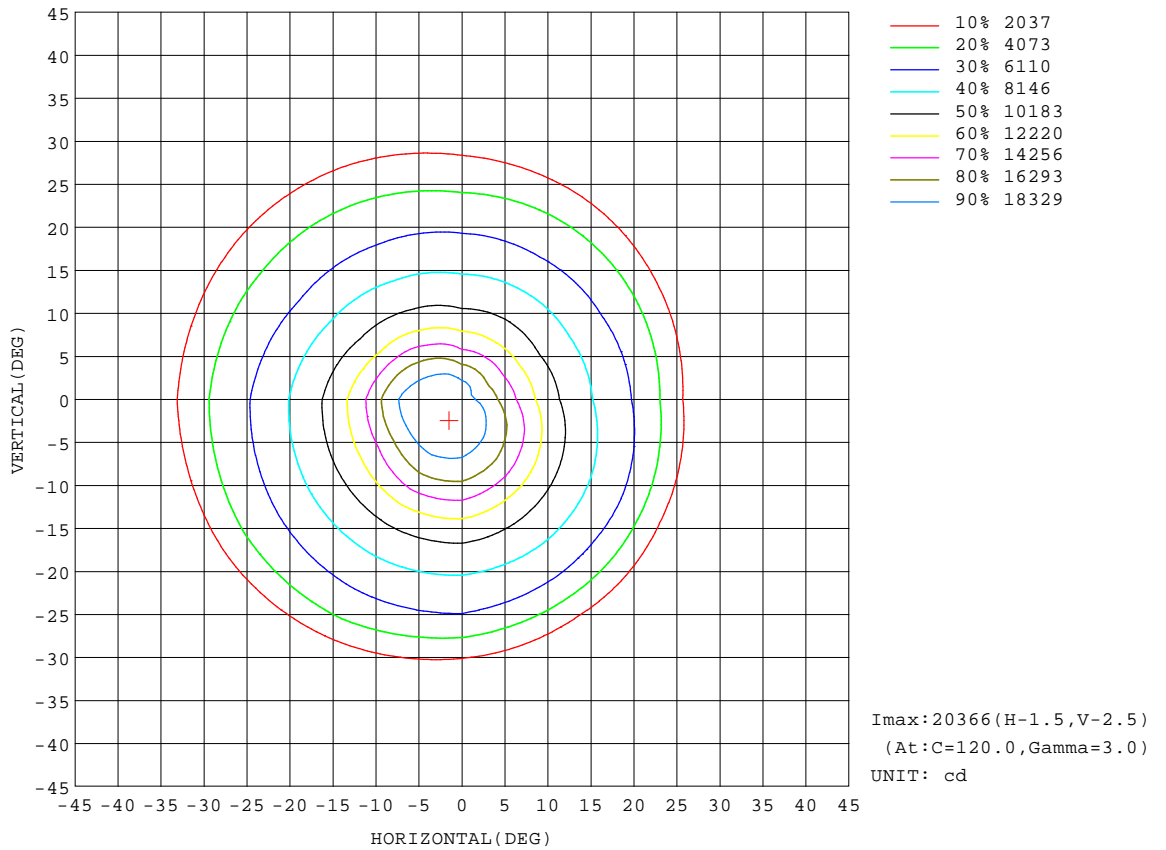


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:220.60V I:0.4090A P:88.300W PF:0.9780 Freq:50.00Hz		
Lamp Flux:7127.88x1 lm		
Name: NS94-88W	Type: LED	
MFR.: Lumega Group	DIM.: 210*210*135mm	
	SUR.: 185*185mm	

Flux out:2572 lm

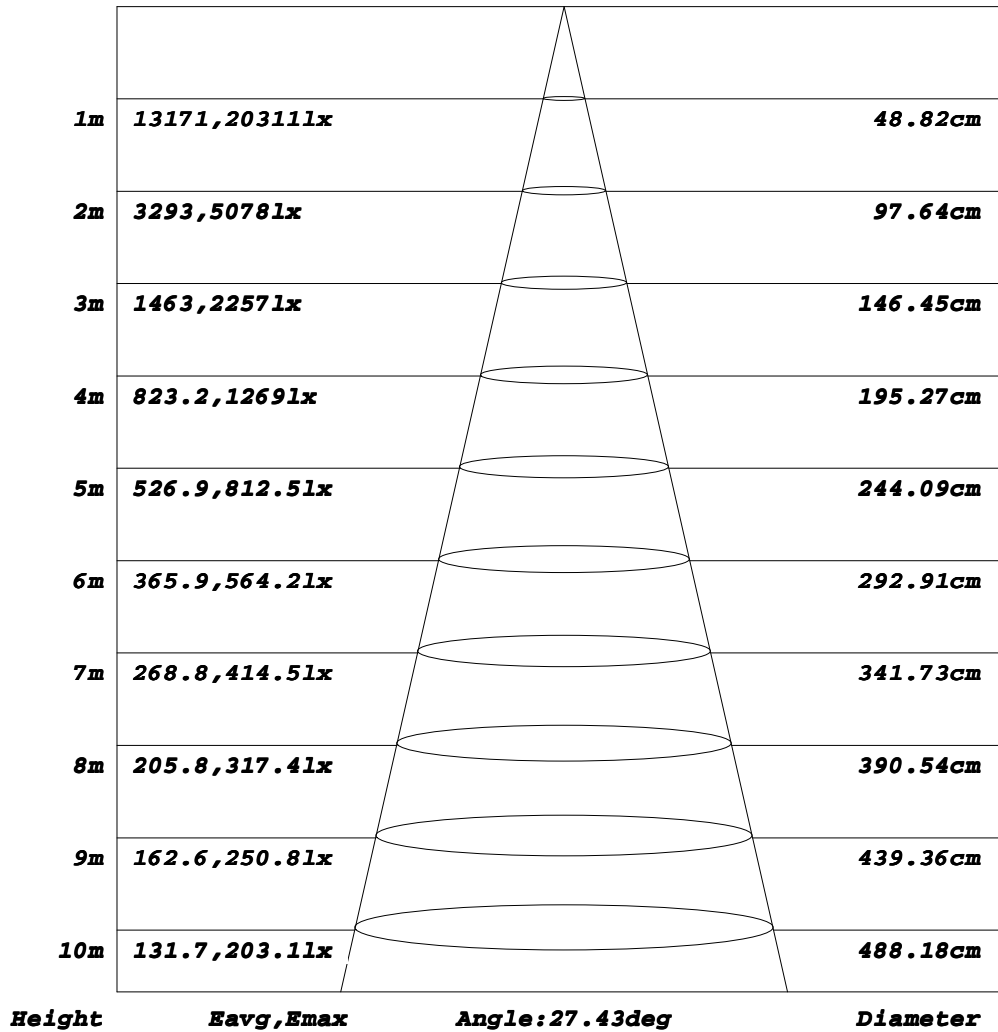


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:220.60V I:0.4090A P:88.300W PF:0.9780 Freq:50.00Hz		
Lamp Flux:7127.88x1 lm		
Name: NS94-88W	Type: LED	
MFR.: Lumega Group	DIM.: 210*210*135mm	
	SUR.: 185*185mm	

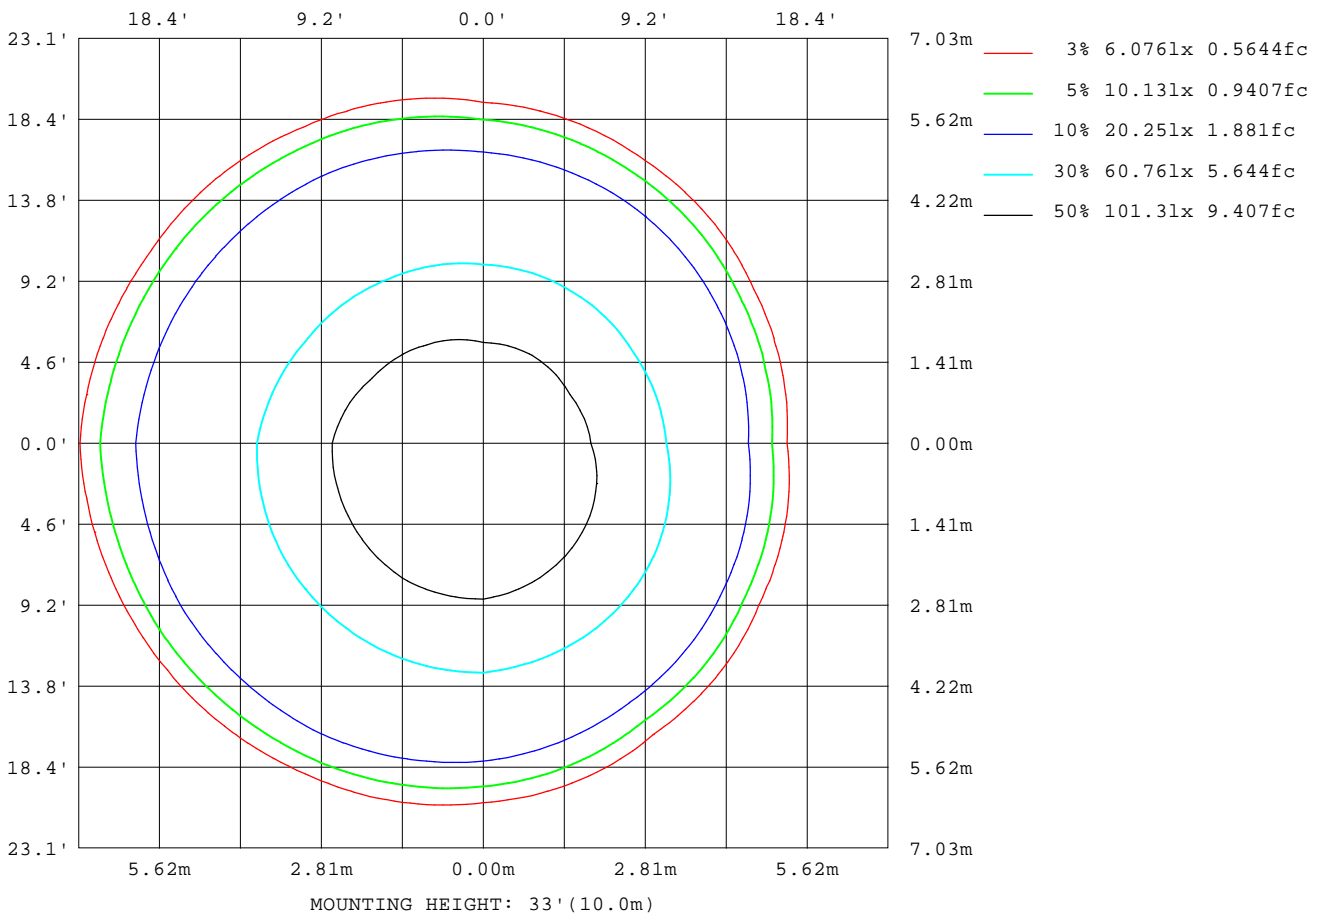

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

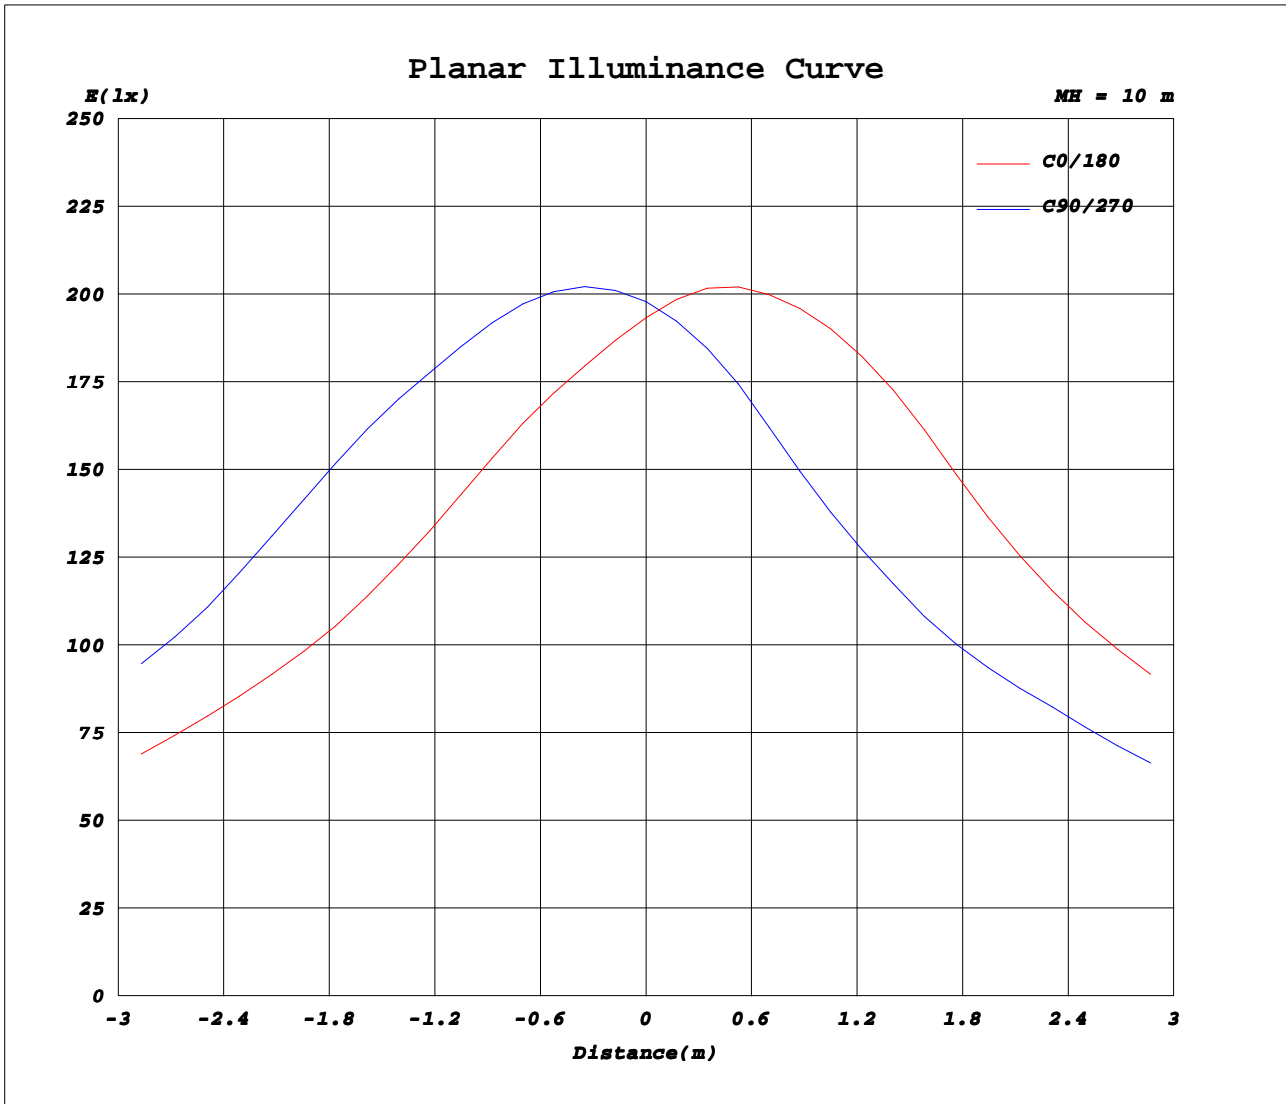

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.60V I:0.4090A P:88.300W PF:0.9780 Freq:50.00Hz		
Lamp Flux:7127.88x1 lm		
Name: NS94-88W	Type: LED	
MFR.: Lumega Group	DIM.: 210*210*135mm	
	SUR.: 185*185mm	

Table--1

UNIT: x10cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1933	1976	1990	1978	1970	1917	1933	1976	1990	1978	1970	1917							
5	1550	1710	1837	1940	1988	1973	1982	1831	1684	1513	1488	1476							
10	1105	1267	1451	1590	1620	1549	1556	1321	1155	1050	1050	1041							
15	824	935	1034	1135	1147	1118	1098	946	854	792	786	785							
20	597	697	775	835	856	841	822	707	630	581	561	563							
25	248	360	492	607	620	612	596	497	434	368	336	287							
30	45.5	64.8	106	212	316	374	382	299	213	118	73.5	52.2							
35	23.8	28.8	34.3	43.1	54.9	77.6	110	63.8	43.6	30.7	27.6	25.7							
40	16.6	18.9	21.3	22.6	26.1	28.5	30.3	27.7	24.0	19.9	18.6	17.4							
45	11.9	13.8	15.4	16.7	17.1	18.0	20.1	18.4	16.4	12.9	11.9	11.9							
50	11.7	12.5	13.3	12.8	12.1	11.6	12.8	11.1	10.3	9.82	9.91	10.7							
55	11.0	12.1	13.1	13.0	11.1	9.62	9.80	9.26	9.45	9.40	9.47	10.0							
60	7.63	8.61	10.00	11.3	10.6	9.34	9.14	8.39	8.59	8.78	8.04	7.74							
65	4.09	4.41	5.19	7.21	7.26	8.10	8.47	7.13	6.47	6.25	5.04	4.57							
70	1.83	2.00	2.43	3.60	3.97	4.65	5.88	4.76	4.08	3.59	2.84	2.55							
75	0.81	0.92	1.11	1.49	1.81	2.24	3.38	2.69	2.33	1.99	1.72	1.58							
80	0.42	0.48	0.56	0.70	0.78	0.94	1.82	1.59	1.47	1.39	1.34	1.29							
85	0.31	0.32	0.35	0.39	0.42	0.47	1.32	1.28	1.27	1.27	1.26	1.24							
90	0.32	0.28	0.25	0.29	0.31	0.32	1.22	1.23	1.23	1.21	1.23	1.25							
95	0.46	0.40	0.36	0.31	0.29	0.28	1.18	1.22	1.27	1.34	1.39	1.42							
100	0.64	0.56	0.50	0.44	0.42	0.40	1.32	1.38	1.45	1.54	1.59	1.61							
105	0.93	0.81	0.71	0.62	0.58	0.56	1.53	1.60	1.67	1.75	1.79	1.81							
110	1.32	1.17	1.02	0.89	0.83	0.79	1.73	1.82	1.90	2.00	2.06	2.09							
115	1.81	1.63	1.44	1.28	1.18	1.14	1.98	2.10	2.24	2.38	2.46	2.50							
120	2.39	2.17	1.96	1.76	1.65	1.59	2.37	2.53	2.67	2.86	2.94	2.99							
125	3.08	2.80	2.56	2.33	2.20	2.11	2.85	3.04	3.21	3.41	3.49	3.56							
130	3.95	3.59	3.30	3.00	2.85	2.74	3.41	3.62	3.82	4.06	4.17	4.24							
135	4.93	4.53	4.18	3.84	3.65	3.53	4.07	4.34	4.57	4.89	5.00	5.11							
140	6.02	5.60	5.21	4.84	4.63	4.50	4.91	5.24	5.56	5.91	6.04	6.13							
145	7.11	6.68	6.30	5.92	5.70	5.57	5.95	6.31	6.66	6.98	7.06	7.19							
150	8.14	7.73	7.36	7.02	6.81	6.68	7.05	7.40	7.70	7.92	7.97	8.13							
155	9.02	8.69	8.36	8.06	7.83	7.74	8.03	8.32	8.53	8.73	8.72	8.92							
160	9.59	9.40	9.18	8.96	8.72	8.63	8.89	9.06	9.19	9.28	9.18	9.40							
165	9.89	9.82	9.70	9.53	9.30	9.22	9.44	9.49	9.45	9.38	9.24	9.46							
170	10.1	10.1	10.00	9.81	9.56	9.49	9.67	9.63	9.46	9.30	9.23	9.37							
175	10.2	10.2	10.1	9.92	9.72	9.68	9.86	9.79	9.60	9.38	9.33	9.39							
180	10.2	10.1	9.96	9.79	9.67	9.64	10.2	10.1	9.99	9.77	9.69	9.62							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-06-10

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: