
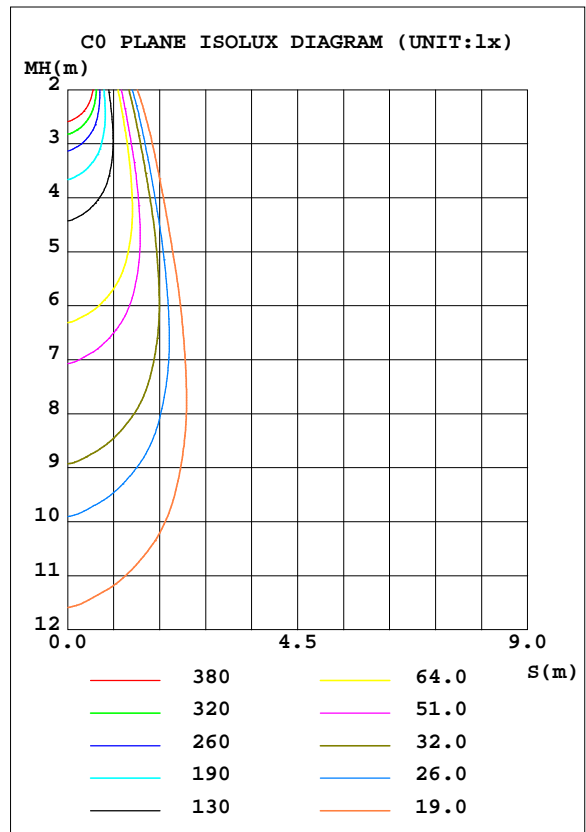


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.80V I:0.0520A P:11.000W PF:0.9480 Freq:50.00Hz		
Lamp Flux:958.339x1 lm		
Name: NS95-φ115mm-10W	Type: LED	
MFR.: Lumega Group	DIM.: D115*H150mm	
	SUR.: D60mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 87.12 lm/W			
MODEL		I _{max} (cd)	2554	S/MH(C0/180)	0.53
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.56
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	958.34	η UP, DN(C0-180)	1.2, 52.6
NOMINAL FLUX(lm)	958.339	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.6, 44.7
LAMPS INSIDE	1	η up(%)	2.7	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down(%)	97.3	CIBSE SHR MAX	0.50

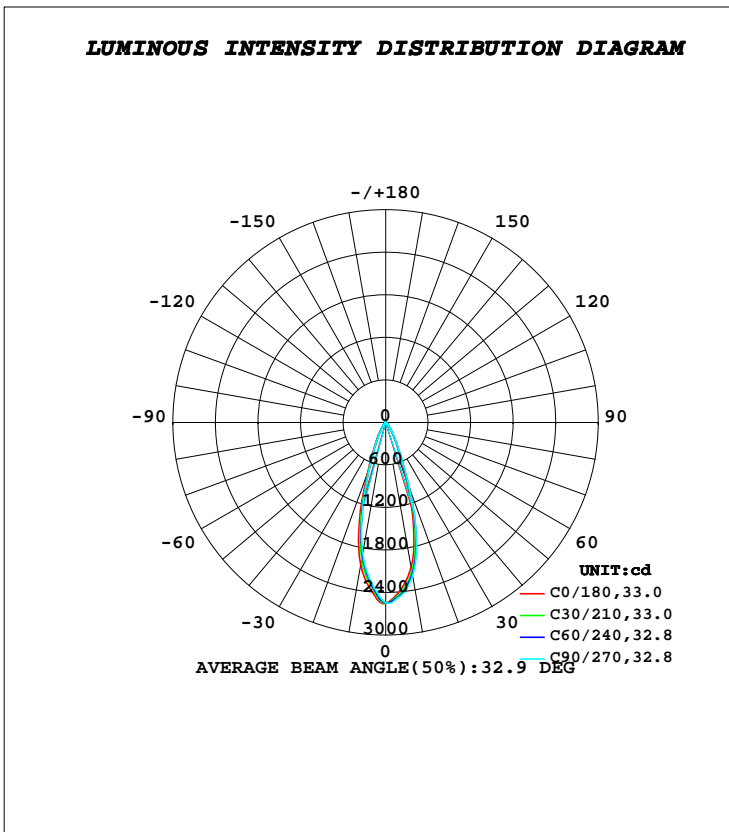

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2073	2148	2191	2153	2039	1924	1877	1928	0- 10	215.9	215.9	22.5,22.5
20	851.5	945.0	964.6	882.7	747.7	674.7	652.9	701.1	10- 20	392.6	608.6	63.5,63.5
30	225.9	246.5	248.9	231.4	209.6	189.1	187.1	197.7	20- 30	193.4	802.0	83.7,83.7
40	66.60	72.06	73.51	69.21	62.30	56.83	56.99	60.44	30- 40	77.62	879.6	91.8,91.8
50	18.81	19.62	21.86	20.86	19.41	17.18	17.64	17.87	40- 50	29.31	908.9	94.8,94.8
60	8.522	8.609	8.756	8.675	9.398	9.277	9.582	8.899	50- 60	10.82	919.8	96,96
70	5.037	5.438	5.744	5.760	6.479	6.324	6.223	5.765	60- 70	7.250	927.0	96.7,96.7
80	1.270	1.469	1.495	1.592	2.519	2.376	2.256	2.296	70- 80	4.038	931.0	97.2,97.2
90	0.2099	0.1968	0.1985	0.2017	1.561	1.582	1.594	1.568	80- 90	1.139	932.2	97.3,97.3
100	0.5103	0.4669	0.4529	0.4734	1.855	1.885	1.903	1.880	90-100	1.109	933.3	97.4,97.4
110	1.189	1.106	1.070	1.105	2.499	2.576	2.616	2.567	100-110	1.553	934.8	97.5,97.5
120	2.236	2.096	2.040	2.070	3.569	3.664	3.702	3.633	110-120	2.300	937.1	97.8,97.8
130	3.982	3.769	3.660	3.722	5.158	5.266	5.290	5.173	120-130	3.235	940.4	98.1,98.1
140	6.444	6.170	6.044	6.134	7.340	7.509	7.545	7.362	130-140	4.305	944.7	98.6,98.6
150	9.265	8.968	8.992	9.041	10.00	10.15	10.20	9.868	140-150	5.105	949.8	99.1,99.1
160	10.49	10.39	10.67	10.58	11.21	11.23	11.35	10.72	150-160	4.802	954.6	99.6,99.6
170	9.120	9.328	9.385	9.562	9.625	9.525	9.155	8.965	160-170	2.915	957.5	99.9,99.9
180	8.256	8.302	8.003	8.038	8.269	8.296	7.984	8.027	170-180	0.8353	958.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.80V I:0.0520A P:11.000W PF:0.9480 Freq:50.00Hz		
Lamp Flux:958.339x1 lm		
Name: NS95-φ115mm-10W	Type: LED	
MFR.: Lumega Group	DIM.: D115*H150mm	
	SUR.: D60mm	

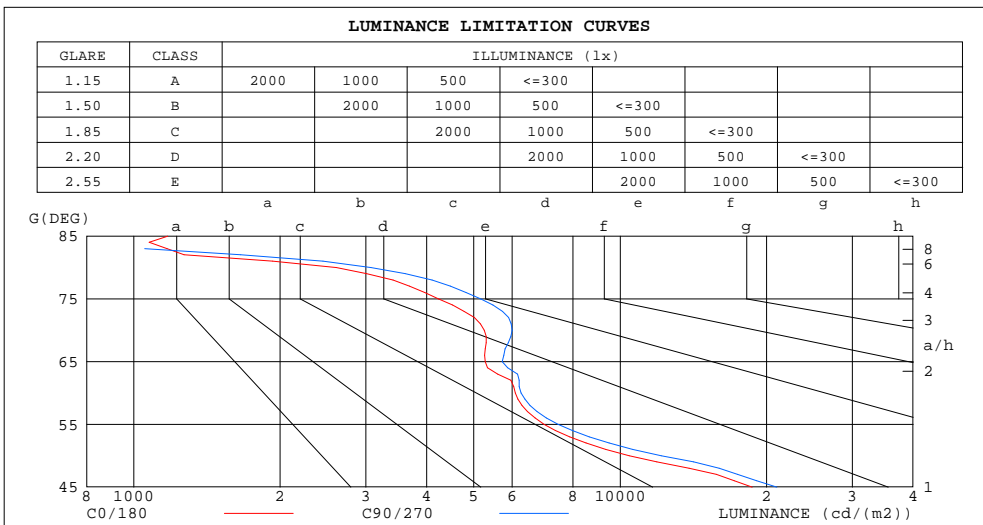

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1174	618
80	2611	3075
75	4233	5169
70	5260	5998
65	5280	5725
60	6087	6254
55	6976	7463
50	10448	12148
45	18678	20989


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.80V I:0.0520A P:11.000W PF:0.9480 Freq:50.00Hz Lamp Flux:958.339x1 lm		
Name: NS95-φ115mm-10W	Type: LED	
MFR.: Lumega Group	DIM.: D115*H150mm	
	SUR.: D60mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.04	1.02	1.01	.00	.99	.98	.96	.95	.94	.92
2.0	1.04	1.01	.98	1.03	.99	.97	.99	.96	.94	.96	.94	.92	.93	.91	.89	.88
3.0	.99	.94	.91	.97	.93	.90	.94	.91	.88	.92	.89	.87	.89	.87	.85	.83
4.0	.94	.89	.85	.92	.88	.85	.90	.86	.83	.88	.85	.82	.86	.83	.81	.80
5.0	.89	.84	.81	.88	.84	.80	.86	.82	.79	.84	.81	.78	.82	.80	.77	.76
6.0	.85	.80	.76	.84	.80	.76	.83	.78	.75	.81	.77	.75	.79	.76	.74	.73
7.0	.81	.76	.73	.81	.76	.73	.79	.75	.72	.78	.74	.71	.77	.73	.71	.70
8.0	.78	.73	.70	.77	.73	.69	.76	.72	.69	.75	.71	.69	.74	.71	.68	.67
9.0	.75	.70	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.71	.68	.66	.64
10.0	.72	.67	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.69	.66	.63	.62

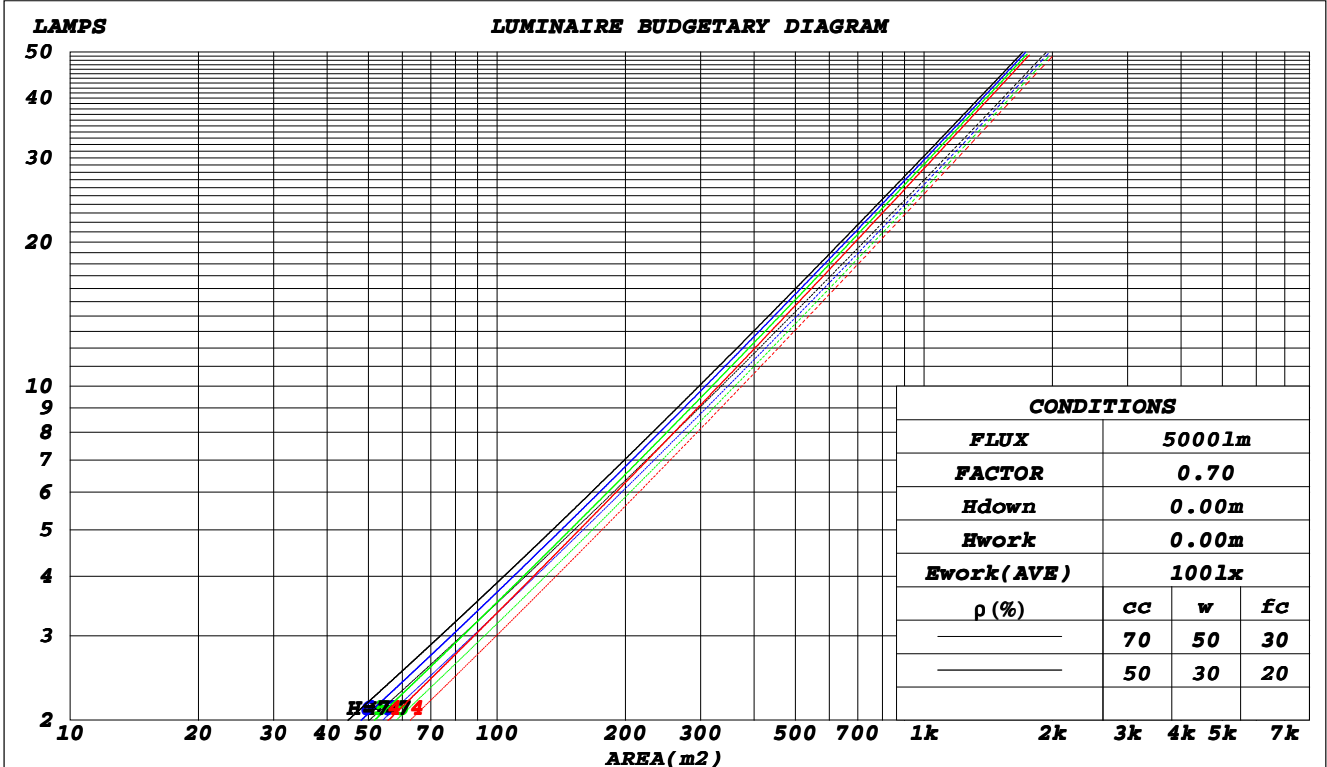

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:221.80V I:0.0520A P:11.000W PF:0.9480 Freq:50.00Hz		
Lamp Flux:958.339x1 lm		
Name: NS95-φ115mm-10W	Type: LED	
MFR.: Lumega Group	DIM.: D115*H150mm	
	SUR.: D60mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.161	.092	.029	.154	.088	.028	.139	.080	.026	.127	.073	.023	.115	.066	.021	
2.0	.151	.083	.025	.145	.080	.025	.133	.074	.023	.122	.068	.021	.112	.063	.020	
3.0	.142	.075	.023	.136	.073	.022	.126	.068	.021	.117	.064	.020	.108	.060	.019	
4.0	.133	.069	.020	.129	.067	.020	.120	.064	.019	.112	.060	.018	.104	.057	.017	
5.0	.126	.064	.019	.122	.063	.018	.114	.059	.018	.107	.057	.017	.100	.054	.016	
6.0	.119	.060	.017	.116	.058	.017	.109	.056	.016	.103	.053	.016	.097	.051	.015	
7.0	.113	.056	.016	.110	.055	.016	.104	.053	.015	.099	.051	.015	.094	.049	.014	
8.0	.108	.053	.015	.105	.052	.015	.100	.050	.014	.095	.048	.014	.090	.046	.014	
9.0	.103	.050	.014	.101	.049	.014	.096	.047	.013	.091	.046	.013	.087	.044	.013	
10.0	.099	.047	.013	.097	.047	.013	.092	.045	.013	.088	.044	.012	.084	.042	.012	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.211	.211	.211	.181	.181	.181	.123	.123	.123	.071	.071	.071	.023	.023	.023	
1.0	.191	.178	.167	.163	.153	.144	.112	.105	.099	.064	.061	.058	.021	.020	.019	
2.0	.175	.154	.136	.150	.132	.118	.102	.092	.082	.059	.053	.048	.019	.017	.016	
3.0	.161	.135	.114	.138	.116	.099	.095	.081	.069	.055	.047	.041	.018	.015	.013	
4.0	.150	.120	.097	.128	.103	.084	.088	.072	.059	.051	.042	.035	.016	.014	.012	
5.0	.140	.108	.084	.120	.093	.073	.083	.065	.052	.048	.038	.031	.015	.012	.010	
6.0	.132	.098	.074	.113	.085	.065	.078	.060	.046	.045	.035	.027	.015	.011	.009	
7.0	.125	.090	.066	.107	.078	.058	.074	.055	.041	.043	.032	.024	.014	.011	.008	
8.0	.119	.084	.060	.102	.073	.052	.071	.051	.037	.041	.030	.022	.013	.010	.007	
9.0	.113	.079	.055	.097	.068	.048	.068	.048	.034	.039	.028	.020	.013	.009	.007	
10.0	.108	.074	.051	.093	.064	.045	.065	.045	.032	.038	.027	.019	.012	.009	.006	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.80V I:0.0520A P:11.000W PF:0.9480 Freq:50.00Hz		
Lamp Flux:958.339x1 lm		
Name: NS95-φ115mm-10W	Type: LED	
MFR.: Lumega Group	DIM.: D115*H150mm	
	SUR.: D60mm	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.6	16.4	15.9	16.6	16.8	16.1	16.8	16.3	17.0	17.2
3H	15.8	16.5	16.1	16.7	17.0	16.2	16.9	16.5	17.2	17.4
4H	15.9	16.5	16.2	16.8	17.1	16.3	17.0	16.6	17.3	17.5
6H	15.8	16.5	16.2	16.8	17.1	16.3	17.0	16.7	17.3	17.5
8H	15.8	16.4	16.1	16.7	17.0	16.3	16.9	16.6	17.2	17.5
12H	15.8	16.3	16.1	16.7	17.0	16.2	16.8	16.6	17.1	17.5
4H 2H	15.6	16.2	15.9	16.5	16.8	16.0	16.6	16.3	16.9	17.2
3H	15.8	16.4	16.2	16.7	17.0	16.2	16.8	16.6	17.2	17.5
4H	15.9	16.5	16.3	16.8	17.2	16.4	16.9	16.8	17.3	17.6
6H	16.0	16.4	16.4	16.8	17.2	16.4	16.9	16.9	17.3	17.7
8H	15.9	16.4	16.4	16.8	17.2	16.4	16.8	16.8	17.2	17.7
12H	15.9	16.3	16.3	16.7	17.1	16.3	16.8	16.8	17.2	17.6
8H 4H	15.9	16.3	16.3	16.7	17.2	16.4	16.8	16.8	17.2	17.6
6H	16.0	16.3	16.4	16.8	17.2	16.4	16.8	16.9	17.2	17.7
8H	15.9	16.2	16.4	16.7	17.2	16.4	16.7	16.9	17.2	17.7
12H	15.9	16.1	16.4	16.6	17.2	16.3	16.6	16.8	17.1	17.6
12H 4H	15.9	16.3	16.3	16.7	17.1	16.3	16.7	16.8	17.1	17.6
6H	15.9	16.2	16.4	16.7	17.2	16.4	16.7	16.9	17.2	17.7
8H	15.9	16.2	16.4	16.6	17.2	16.3	16.6	16.8	17.1	17.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.8 / - 2.9					+ 2.0 / - 2.8				
1.5H	+ 3.3 / - 2.9					+ 3.5 / - 2.8				
2.0H	+ 3.2 / - 1.6					+ 3.4 / - 1.6				

CIE Pub.117, 958.3 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.1)
 Area: 0.0028 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.80V I:0.0520A P:11.000W PF:0.9480 Freq:50.00Hz Lamp Flux:958.339x1 lm		
Name: NS95-φ115mm-10W	Type: LED	
MFR.: Lumega Group	DIM.: D115*H150mm	
	SUR.: D60mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	79	76	72
0.80	94	88	84	93	88	84	92	87	83	80
1.00	98	92	89	97	92	88	95	92	88	84
1.25	102	97	93	101	96	93	99	95	92	87
1.50	105	100	97	103	99	96	101	97	95	90
2.00	108	103	100	106	102	99	103	100	97	91
2.50	109	105	102	107	104	101	104	101	99	92
3.00	111	107	105	109	106	103	105	103	101	94
4.00	113	110	108	111	108	106	107	105	103	95
5.00	114	112	110	112	110	108	107	106	105	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.80V I:0.0520A P:11.000W PF:0.9480 Freq:50.00Hz		
Lamp Flux:958.339x1 lm		
Name: NS95-φ115mm-10W	Type: LED	
MFR.: Lumega Group	DIM.: D115*H150mm	
	SUR.: D60mm	

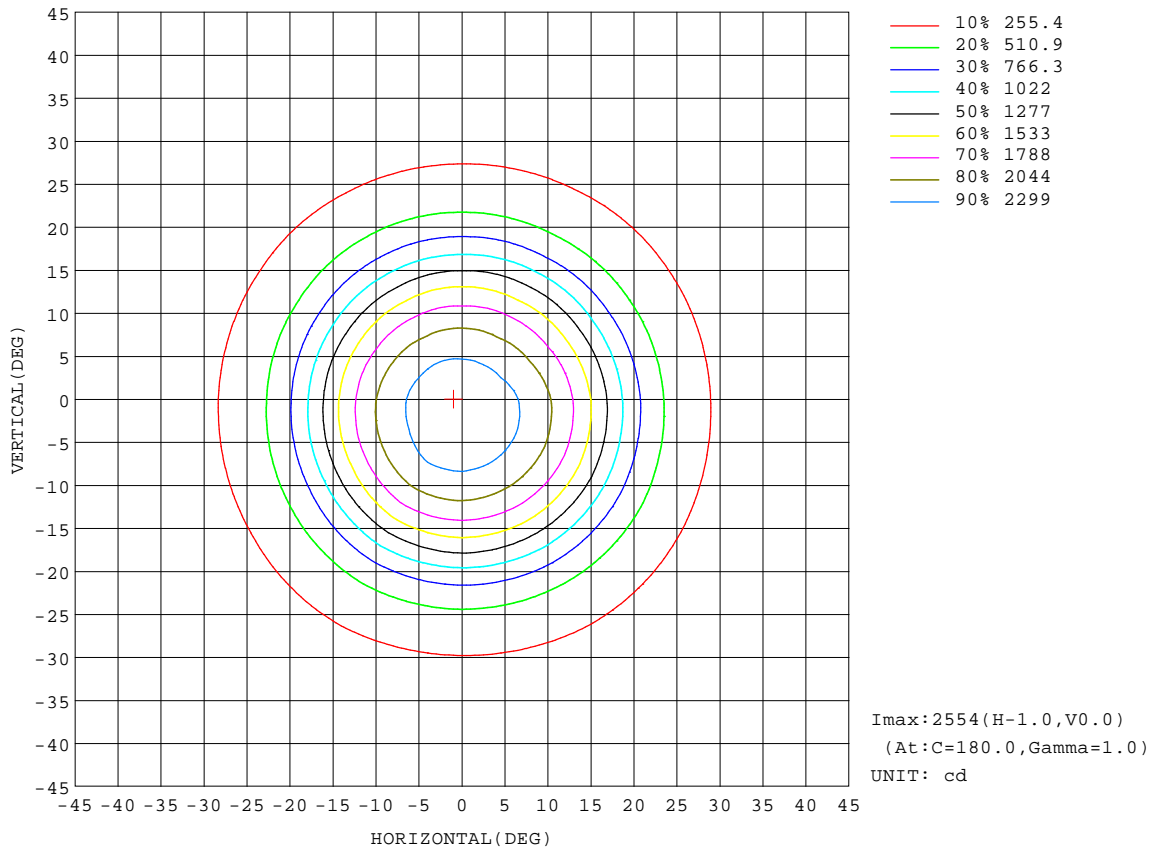


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

AAI Figure

Test:U:221.80V I:0.0520A P:11.000W PF:0.9480 Freq:50.00Hz		
Lamp Flux:958.339x1 lm		
Name: NS95-φ115mm-10W	Type: LED	
MFR.: Lumega Group	DIM.: D115*H150mm	
	SUR.: D60mm	

Flux out:505.3 lm

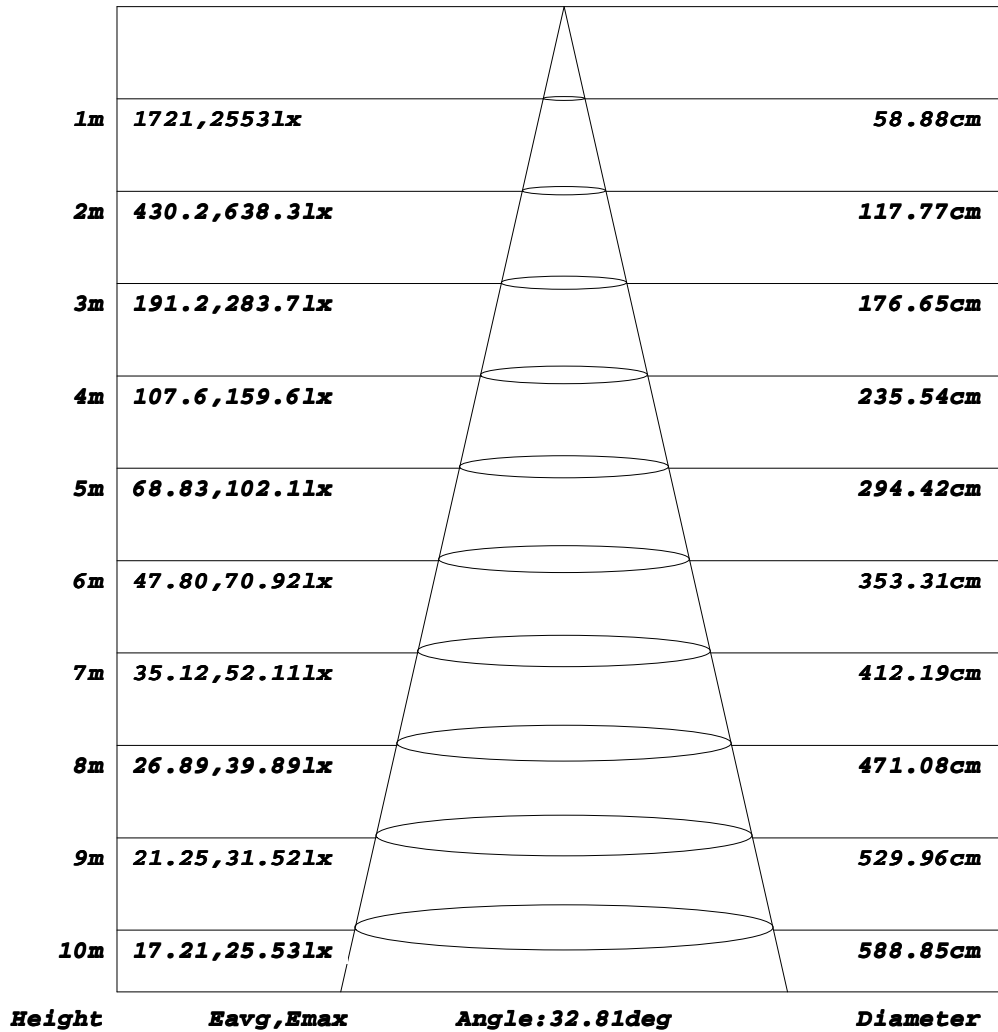


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

ISOLUX DIAGRAM


Test:U:221.80V I:0.0520A P:11.000W PF:0.9480 Freq:50.00Hz		
Lamp Flux:958.339x1 lm		
Name: NS95-φ115mm-10W	Type: LED	
MFR.: Lumega Group	DIM.: D115*H150mm	
	SUR.: D60mm	

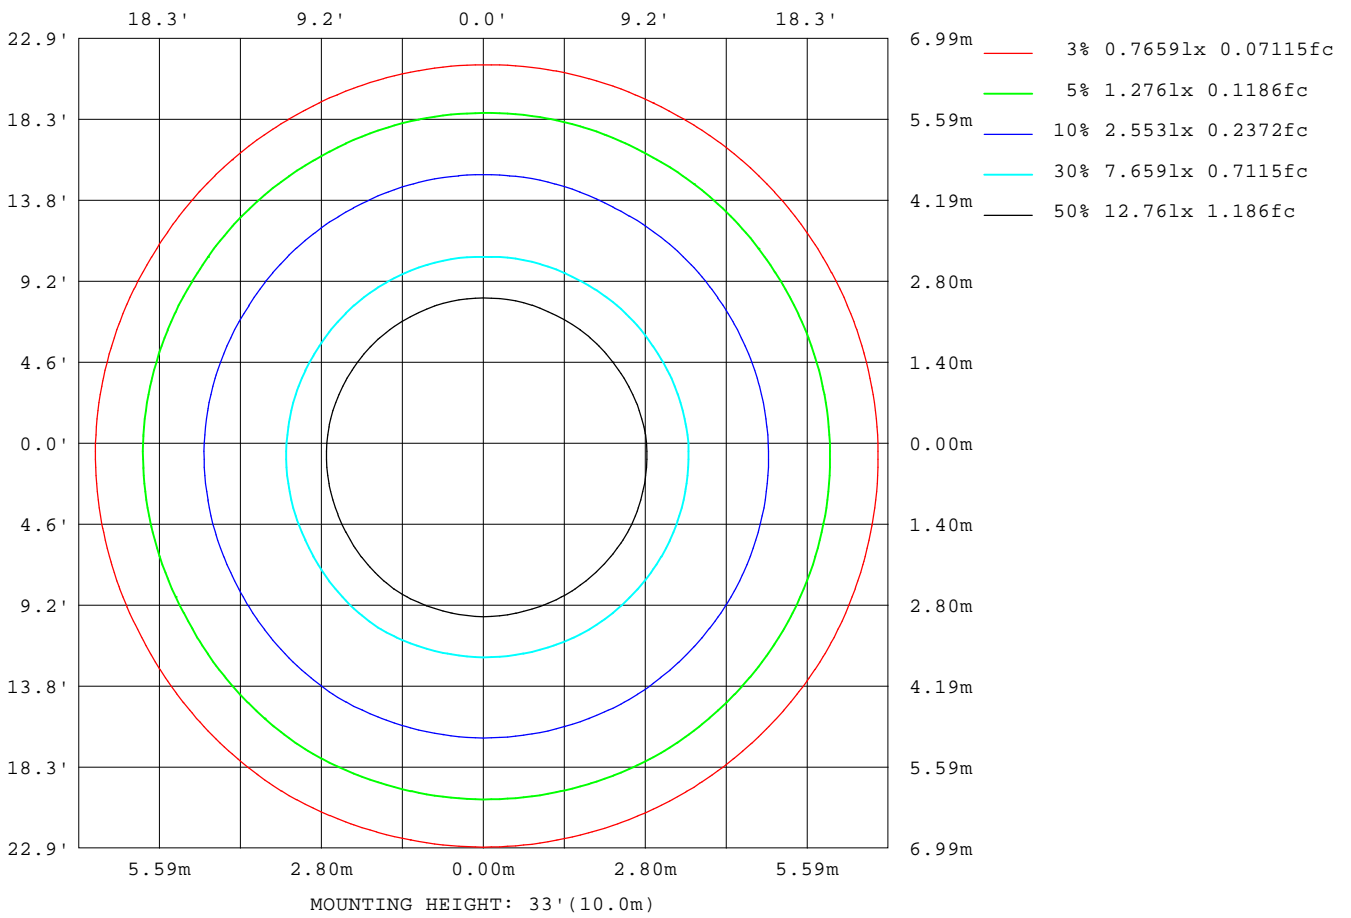

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

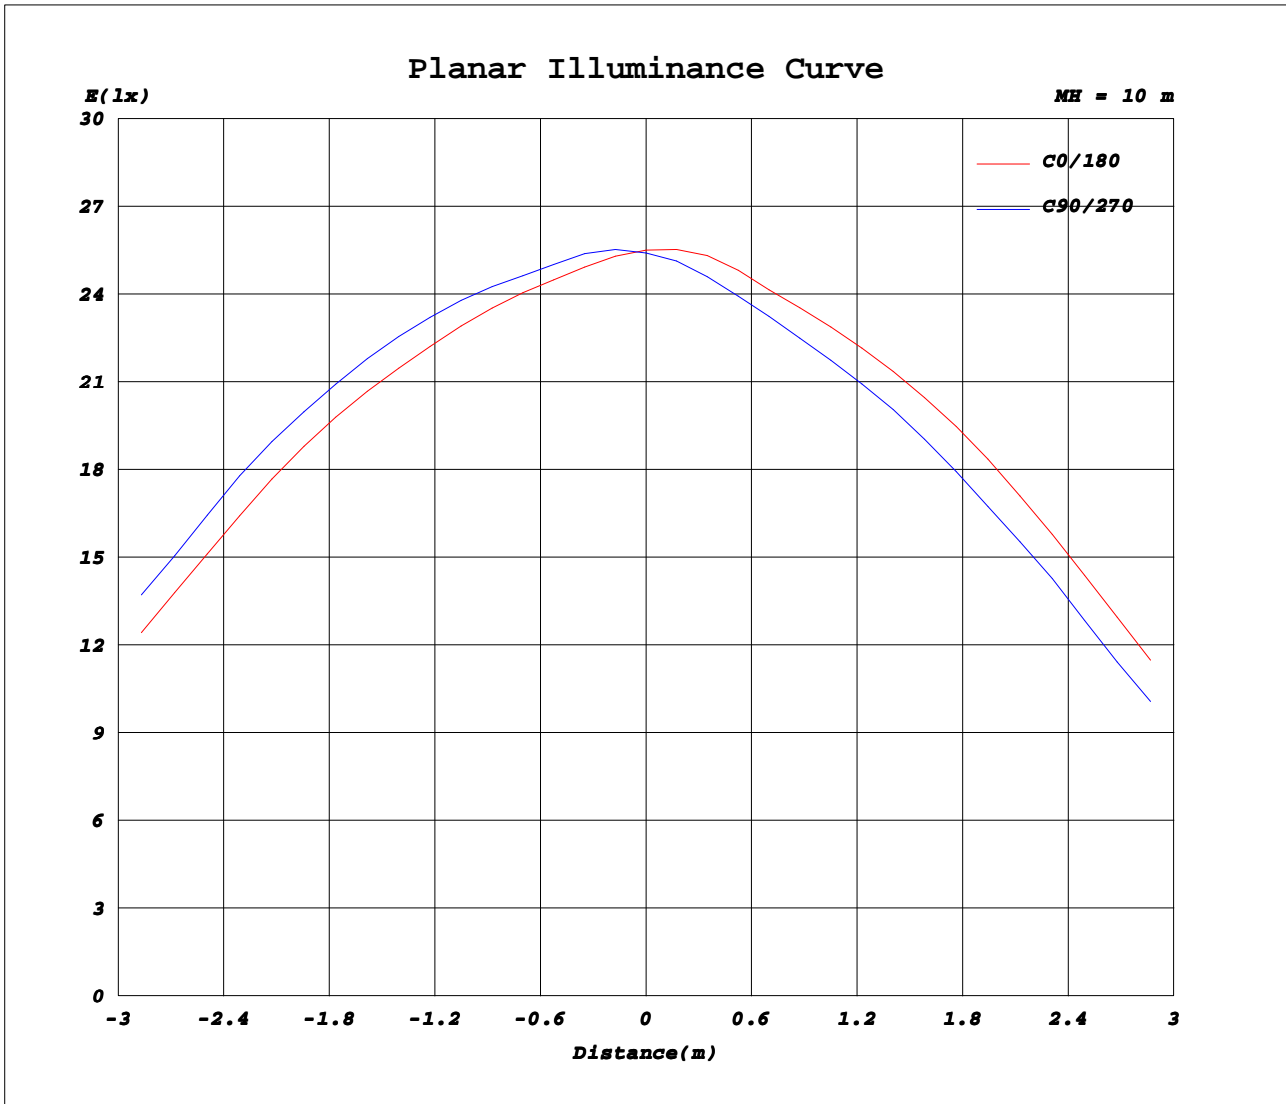

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.80V I:0.0520A P:11.000W PF:0.9480 Freq:50.00Hz		
Lamp Flux:958.339x1 lm		
Name: NS95-φ115mm-10W	Type: LED	
MFR.: Lumega Group	DIM.: D115*H150mm	
	SUR.: D60mm	

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	2550	2550	2544	2541	2534	2525	2550	2550	2544	2541	2534	2525							
5	2380	2418	2437	2454	2446	2403	2380	2329	2300	2276	2280	2306							
10	2073	2130	2167	2191	2194	2112	2039	1949	1898	1877	1901	1955							
15	1531	1611	1660	1670	1654	1524	1437	1337	1278	1267	1301	1388							
20	851	922	968	965	944	821	748	690	659	653	665	737							
25	414	447	467	466	458	409	381	349	336	335	339	368							
30	226	241	252	249	243	220	210	192	186	187	191	204							
35	123	132	136	137	134	122	115	107	104	104	106	114							
40	66.6	71.2	72.9	73.5	72.4	66.0	62.3	57.3	56.3	57.0	58.4	62.4							
45	37.0	39.1	40.1	41.6	39.9	37.5	35.9	32.4	32.6	33.1	34.0	35.5							
50	18.8	18.9	20.3	21.9	21.6	20.1	19.4	17.2	17.2	17.6	17.6	18.1							
55	11.2	10.9	11.6	12.0	11.8	11.6	11.7	10.6	10.8	11.2	11.0	11.2							
60	8.52	8.36	8.86	8.76	8.56	8.79	9.40	9.05	9.50	9.58	9.04	8.76							
65	6.25	6.35	6.83	6.77	6.77	7.17	7.90	7.80	8.14	7.92	7.21	6.80							
70	5.04	5.22	5.66	5.74	5.65	5.87	6.48	6.28	6.37	6.22	5.84	5.69							
75	3.07	3.27	3.57	3.75	3.66	3.67	4.37	4.14	4.11	4.00	3.83	3.84							
80	1.27	1.49	1.44	1.50	1.55	1.63	2.52	2.42	2.33	2.26	2.23	2.36							
85	0.29	0.26	0.16	0.15	0.16	0.30	1.56	1.52	1.45	1.45	1.44	1.50							
90	0.21	0.20	0.19	0.20	0.19	0.21	1.56	1.58	1.59	1.59	1.59	1.55							
95	0.32	0.30	0.29	0.29	0.29	0.31	1.70	1.71	1.72	1.73	1.73	1.69							
100	0.51	0.47	0.46	0.45	0.46	0.49	1.86	1.88	1.89	1.90	1.90	1.86							
105	0.80	0.75	0.73	0.71	0.72	0.76	2.11	2.15	2.17	2.18	2.18	2.12							
110	1.19	1.12	1.09	1.07	1.08	1.13	2.50	2.56	2.59	2.62	2.61	2.53							
115	1.65	1.55	1.53	1.50	1.51	1.55	3.00	3.05	3.10	3.11	3.11	3.02							
120	2.24	2.11	2.08	2.04	2.04	2.10	3.57	3.64	3.68	3.70	3.68	3.58							
125	3.00	2.87	2.80	2.76	2.75	2.84	4.26	4.36	4.40	4.42	4.38	4.26							
130	3.98	3.82	3.72	3.66	3.66	3.79	5.16	5.23	5.30	5.29	5.27	5.08							
135	5.13	4.94	4.81	4.76	4.74	4.91	6.15	6.28	6.32	6.34	6.28	6.10							
140	6.44	6.24	6.10	6.04	6.03	6.24	7.34	7.47	7.55	7.55	7.48	7.24							
145	7.88	7.65	7.53	7.51	7.48	7.71	8.66	8.79	8.88	8.88	8.77	8.50							
150	9.26	9.00	8.93	8.99	8.94	9.14	10.0	10.1	10.2	10.2	10.0	9.71							
155	10.2	9.98	10.0	10.2	10.1	10.2	11.0	11.0	11.2	11.2	10.8	10.5							
160	10.5	10.3	10.4	10.7	10.6	10.6	11.2	11.1	11.3	11.3	10.9	10.6							
165	9.97	9.99	10.1	10.2	10.3	10.3	10.6	10.5	10.6	10.5	10.2	9.89							
170	9.12	9.25	9.40	9.39	9.54	9.58	9.63	9.69	9.36	9.15	8.96	8.97							
175	8.41	8.49	8.56	8.40	8.55	8.65	8.65	8.71	8.44	8.11	8.20	8.00							
180	8.26	8.36	8.24	8.00	8.10	7.98	8.27	8.36	8.23	7.98	8.10	7.95							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: