
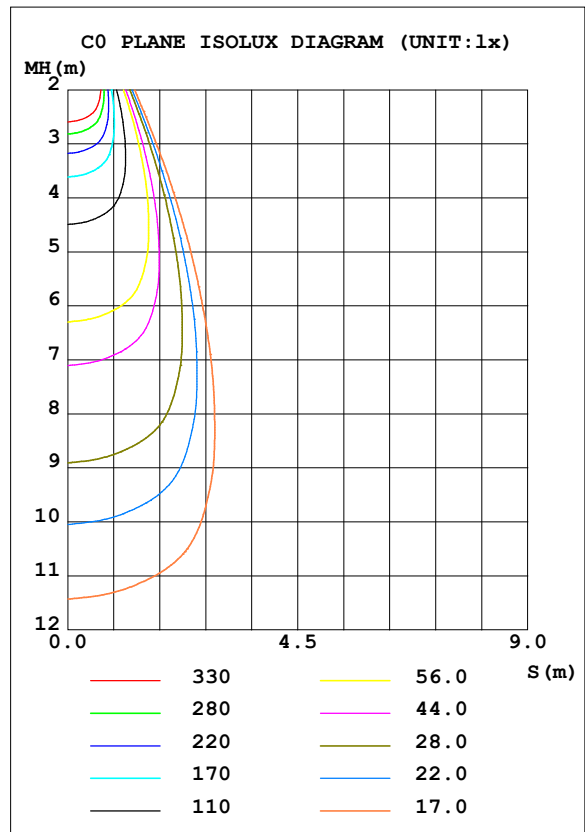


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.50V I:0.0970A P:20.800W PF:0.9660 Freq:50.00Hz		
Lamp Flux:1206.17x1 lm		
Name: NS99-18W	Type: LED	
MFR.: Lumega		

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	2226	S/MH (C0/180)	0.71
NOMINAL POWER (W)	18	LOR (%)	100.0	S/MH (C90/270)	0.66
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1206.2	η UP, DN (C0-180)	0.2, 48.3
NOMINAL FLUX (lm)	1206.17	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 50.8
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	220	η down (%)	99.0	CIBSE SHR MAX	0.65

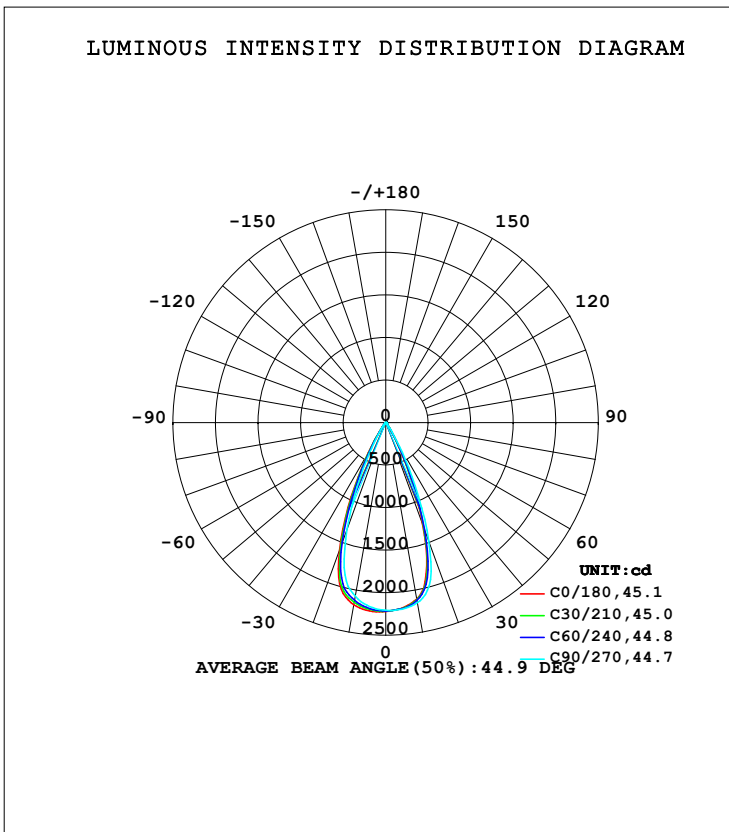

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2105	2117	2148	2138	2172	2132	2072	2084	0- 10	207.0	207.0	17.2,17.2
20	1274	1317	1476	1459	1588	1525	1332	1372	10- 20	518.7	725.7	60.2,60.2
30	236.4	259.4	326.9	326.3	414.3	378.6	279.8	287.6	20- 30	360.9	1087	90.1,90.1
40	35.56	38.65	44.28	45.14	56.23	50.34	41.14	43.25	30- 40	77.98	1165	96.6,96.6
50	7.787	8.586	8.452	9.003	11.87	10.70	9.584	9.128	40- 50	16.73	1181	97.9,97.9
60	3.885	4.074	3.279	3.674	5.406	5.069	4.955	4.601	50- 60	5.467	1187	98.4,98.4
70	2.246	2.201	1.563	1.847	3.748	3.627	3.739	3.510	60- 70	3.399	1190	98.7,98.7
80	1.009	0.9720	0.6816	0.8326	3.065	3.016	3.098	2.972	70- 80	2.478	1193	98.9,98.9
90	0.1652	0.1941	0.2633	0.3100	2.692	2.648	2.590	2.490	80- 90	1.820	1194	99,99
100	0.5816	0.5242	0.4857	0.5050	2.977	2.996	3.077	3.040	90-100	1.664	1196	99.2,99.2
110	0.9466	0.8870	0.8759	0.8993	3.558	3.552	3.595	3.565	100-110	2.139	1198	99.3,99.3
120	1.194	1.142	1.159	1.171	3.597	3.570	3.539	3.527	110-120	2.302	1201	99.5,99.5
130	1.313	1.263	1.311	1.310	3.281	3.227	3.144	3.133	120-130	2.083	1203	99.7,99.7
140	1.197	1.157	1.208	1.212	2.654	2.575	2.429	2.419	130-140	1.610	1204	99.8,99.8
150	1.091	1.049	1.082	1.092	1.722	1.656	1.536	1.515	140-150	1.003	1205	99.9,99.9
160	0.9971	0.9609	1.023	1.017	1.111	1.095	1.063	1.013	150-160	0.5452	1206	100,100
170	0.8176	0.7933	0.8582	0.8433	0.8641	0.8436	0.7996	0.7681	160-170	0.2644	1206	100,100
180	0.7740	0.7559	0.7814	0.7699	0.7855	0.7846	0.7617	0.7465	170-180	0.0748	1206	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.50V I:0.0970A P:20.800W PF:0.9660 Freq:50.00Hz		
Lamp Flux:1206.17x1 lm		
Name: NS99-18W	Type: LED	
MFR.: Lumega		

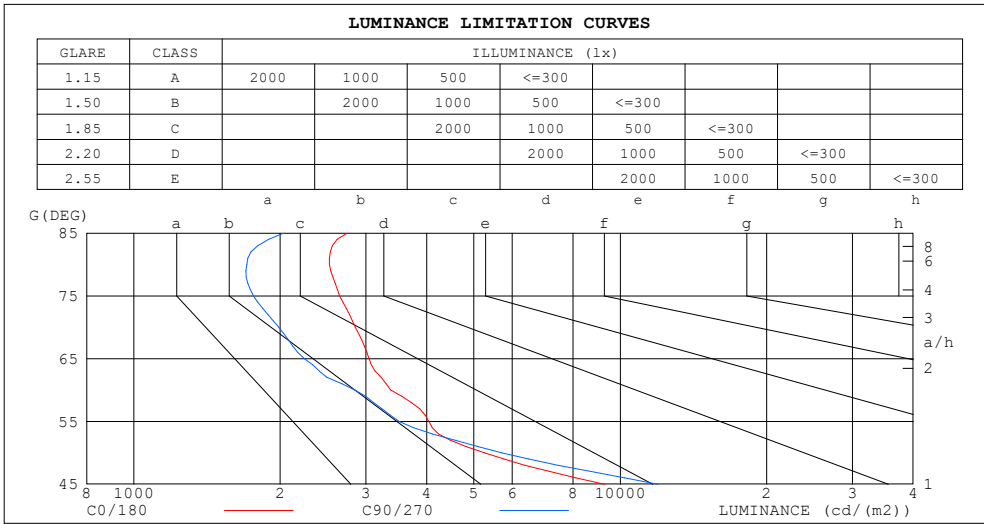

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2745	2031
80	2526	1707
75	2650	1763
70	2855	1986
65	3047	2242
60	3378	2851
55	4044	3512
50	5267	5717
45	9275	11949


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.50V I:0.0970A P:20.800W PF:0.9660 Freq:50.00Hz		
Lamp Flux:1206.17x1 lm		
Name: NS99-18W	Type: LED	
MFR.: Lumega		

ρcc	80%			70%			50%			30%			10%			0
	ρw	50%	30%	10%	ρw	50%	30%	10%	ρw	50%	30%	10%	ρw	50%	30%	10%
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.12	1.09	1.07	1.09	1.07	1.06	1.05	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.05	1.02	.99	1.03	1.00	.97	1.00	.97	.95	.97	.95	.93	.94	.92	.91	.89
3.0	.99	.95	.92	.98	.94	.91	.95	.92	.89	.93	.90	.88	.91	.88	.86	.85
4.0	.94	.90	.86	.93	.89	.85	.91	.87	.84	.89	.86	.83	.87	.84	.82	.81
5.0	.90	.85	.81	.89	.84	.81	.87	.83	.80	.85	.82	.79	.84	.81	.78	.77
6.0	.86	.80	.77	.85	.80	.77	.83	.79	.76	.82	.78	.75	.80	.77	.75	.74
7.0	.82	.77	.73	.81	.76	.73	.80	.75	.72	.79	.75	.72	.77	.74	.72	.70
8.0	.78	.73	.70	.78	.73	.69	.76	.72	.69	.75	.72	.69	.74	.71	.68	.67
9.0	.75	.70	.66	.74	.70	.66	.73	.69	.66	.72	.69	.66	.72	.68	.66	.64
10.0	.72	.67	.64	.71	.67	.64	.71	.66	.63	.70	.66	.63	.69	.65	.63	.62

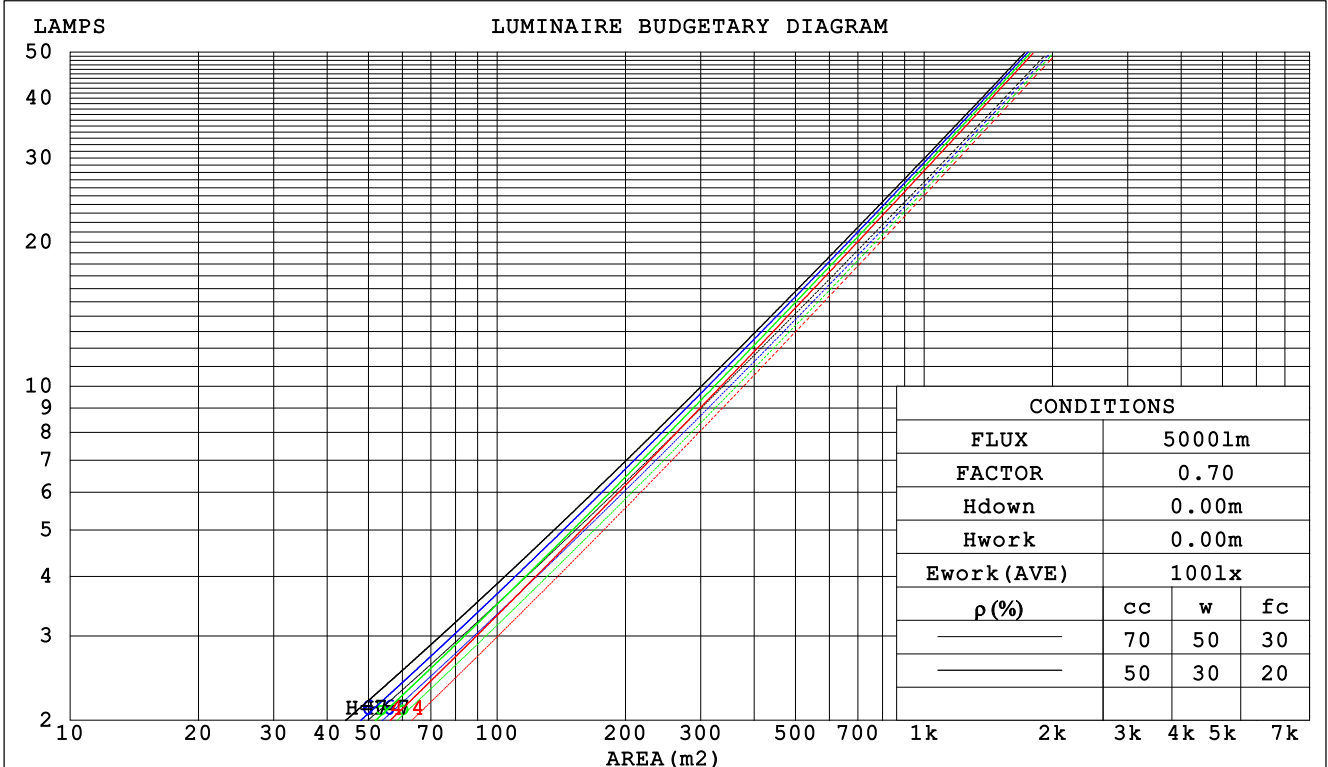

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

WEC AND CCEC

Test:U:220.50V I:0.0970A P:20.800W PF:0.9660 Freq:50.00Hz		
Lamp Flux:1206.17x1 lm		
Name: NS99-18W	Type: LED	
MFR.: Lumega		

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.159	.090	.029	.152	.087	.028	.139	.080	.025	.127	.073	.023	.116	.067	.022	
2.0	.149	.082	.025	.143	.079	.024	.132	.073	.023	.122	.068	.021	.113	.064	.020	
3.0	.140	.074	.022	.135	.072	.022	.126	.068	.021	.117	.064	.020	.109	.061	.019	
4.0	.132	.069	.020	.128	.067	.020	.120	.064	.019	.113	.061	.018	.106	.058	.018	
5.0	.125	.064	.019	.122	.063	.018	.115	.060	.018	.109	.057	.017	.103	.055	.016	
6.0	.119	.060	.017	.116	.059	.017	.110	.056	.016	.105	.054	.016	.099	.052	.016	
7.0	.114	.056	.016	.111	.055	.016	.106	.054	.015	.101	.052	.015	.096	.050	.015	
8.0	.109	.053	.015	.107	.052	.015	.102	.051	.015	.097	.049	.014	.093	.048	.014	
9.0	.105	.051	.014	.102	.050	.014	.098	.049	.014	.094	.047	.014	.090	.046	.013	
10.0	.101	.048	.013	.099	.048	.013	.095	.046	.013	.091	.045	.013	.088	.044	.013	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.177	.165	.154	.152	.142	.132	.104	.097	.092	.060	.056	.053	.019	.018	.017	
2.0	.161	.140	.123	.138	.121	.106	.094	.083	.074	.054	.049	.043	.017	.016	.014	
3.0	.147	.121	.100	.126	.104	.087	.087	.072	.061	.050	.042	.036	.016	.014	.012	
4.0	.136	.106	.083	.116	.092	.072	.080	.064	.051	.046	.037	.030	.015	.012	.010	
5.0	.126	.094	.070	.108	.081	.061	.075	.057	.043	.043	.033	.026	.014	.011	.008	
6.0	.118	.084	.060	.101	.073	.053	.070	.051	.037	.041	.030	.022	.013	.010	.007	
7.0	.111	.077	.052	.095	.066	.046	.066	.047	.032	.038	.027	.019	.012	.009	.006	
8.0	.105	.070	.046	.090	.061	.040	.063	.043	.029	.036	.025	.017	.012	.008	.006	
9.0	.100	.065	.041	.086	.056	.036	.060	.039	.025	.035	.023	.015	.011	.008	.005	
10.0	.095	.060	.037	.082	.052	.032	.057	.037	.023	.033	.022	.014	.011	.007	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.50V I:0.0970A P:20.800W PF:0.9660 Freq:50.00Hz		
Lamp Flux:1206.17x1 lm		
Name: NS99-18W	Type: LED	
MFR.: Lumega		

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.3	13.1	12.5	13.3	13.4	13.4	14.1	13.6	14.3	14.5
3H	12.3	13.0	12.6	13.2	13.5	13.3	14.0	13.5	14.2	14.4
4H	12.3	13.0	12.6	13.2	13.5	13.2	13.9	13.5	14.1	14.4
6H	12.3	13.0	12.6	13.2	13.5	13.2	13.8	13.5	14.1	14.3
8H	12.3	12.9	12.6	13.2	13.5	13.1	13.8	13.5	14.0	14.3
12H	12.3	12.9	12.6	13.2	13.5	13.1	13.7	13.4	14.0	14.3
4H 2H	12.1	12.8	12.4	13.1	13.3	13.2	13.9	13.5	14.1	14.3
3H	12.2	12.8	12.5	13.1	13.4	13.1	13.7	13.4	14.0	14.3
4H	12.3	12.8	12.6	13.1	13.4	13.1	13.6	13.4	13.9	14.3
6H	12.3	12.8	12.7	13.1	13.5	13.1	13.5	13.4	13.9	14.2
8H	12.3	12.8	12.7	13.1	13.5	13.0	13.5	13.4	13.8	14.2
12H	12.3	12.7	12.8	13.1	13.5	13.0	13.4	13.4	13.8	14.2
8H 4H	12.2	12.6	12.6	13.0	13.4	13.0	13.4	13.4	13.8	14.2
6H	12.3	12.7	12.7	13.1	13.5	13.0	13.4	13.4	13.8	14.2
8H	12.3	12.7	12.8	13.1	13.5	13.0	13.3	13.4	13.7	14.2
12H	12.4	12.7	12.9	13.1	13.6	13.0	13.3	13.5	13.7	14.2
12H 4H	12.1	12.6	12.6	12.9	13.3	13.0	13.4	13.4	13.7	14.2
6H	12.2	12.6	12.7	13.0	13.5	12.9	13.3	13.4	13.7	14.2
8H	12.3	12.6	12.8	13.1	13.5	13.0	13.2	13.4	13.7	14.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.2 / - 3.1					+ 3.1 / - 4.5				
1.5H	+ 4.2 / - 2.9					+ 5.2 / - 3.9				
2.0H	+ 2.2 / - 1.1					+ 3.9 / - 1.8				

CIE Pub.117, 1206 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.7)
 Area: 0.0023 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.50V I:0.0970A P:20.800W PF:0.9660 Freq:50.00Hz		
Lamp Flux:1206.17x1 lm		
Name: NS99-18W	Type: LED	
MFR.: Lumega		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	80	89	83	80	88	83	80	76
0.80	96	91	88	96	91	87	95	90	87	84
1.00	100	95	92	100	95	91	98	94	91	87
1.25	104	99	96	103	99	96	101	97	95	91
1.50	107	102	99	105	101	98	103	100	97	93
2.00	109	105	102	107	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	104	103	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	110	109	108	106	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.50V I:0.0970A P:20.800W PF:0.9660 Freq:50.00Hz		
Lamp Flux:1206.17x1 lm		
Name: NS99-18W	Type: LED	
MFR.: Lumega		

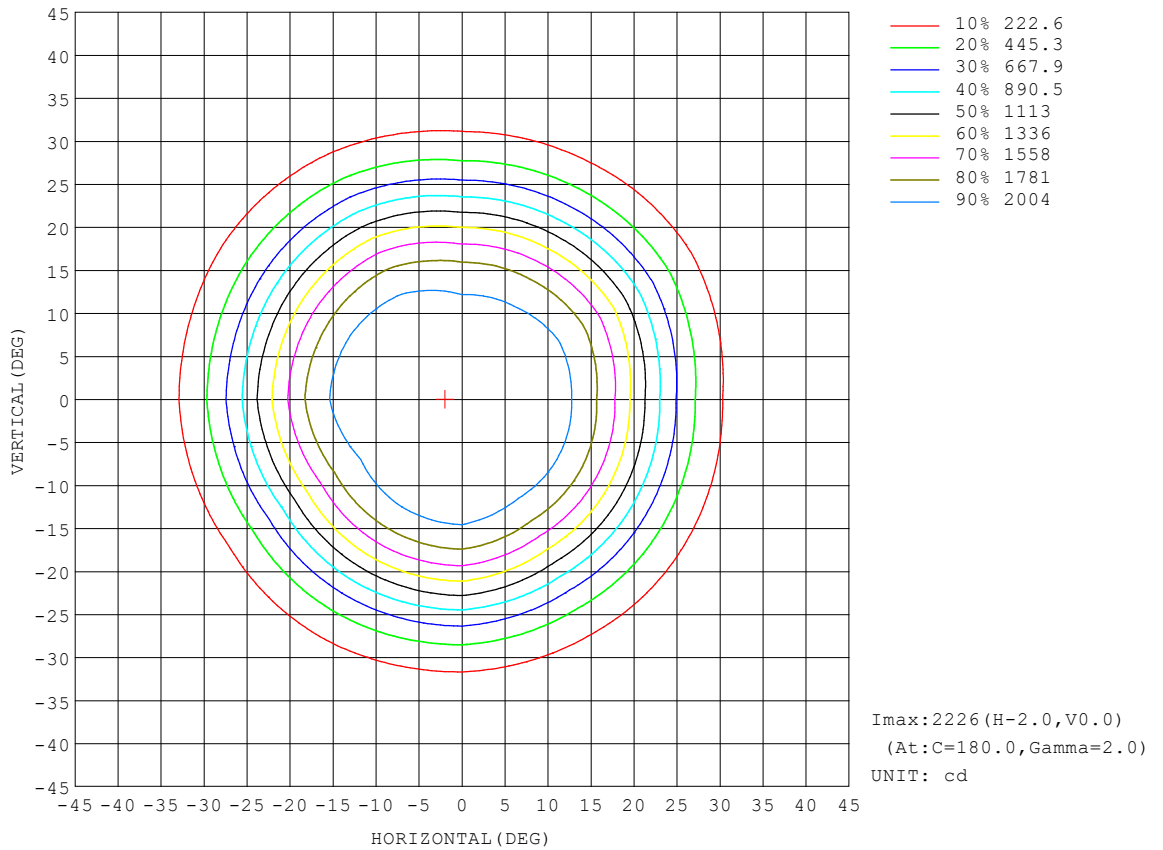


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks:

AAI Figure

Test:U:220.50V I:0.0970A P:20.800W PF:0.9660 Freq:50.00Hz		
Lamp Flux:1206.17x1 lm		
Name: NS99-18W	Type: LED	
MFR.: Lumega		

Flux out:873.3 lm

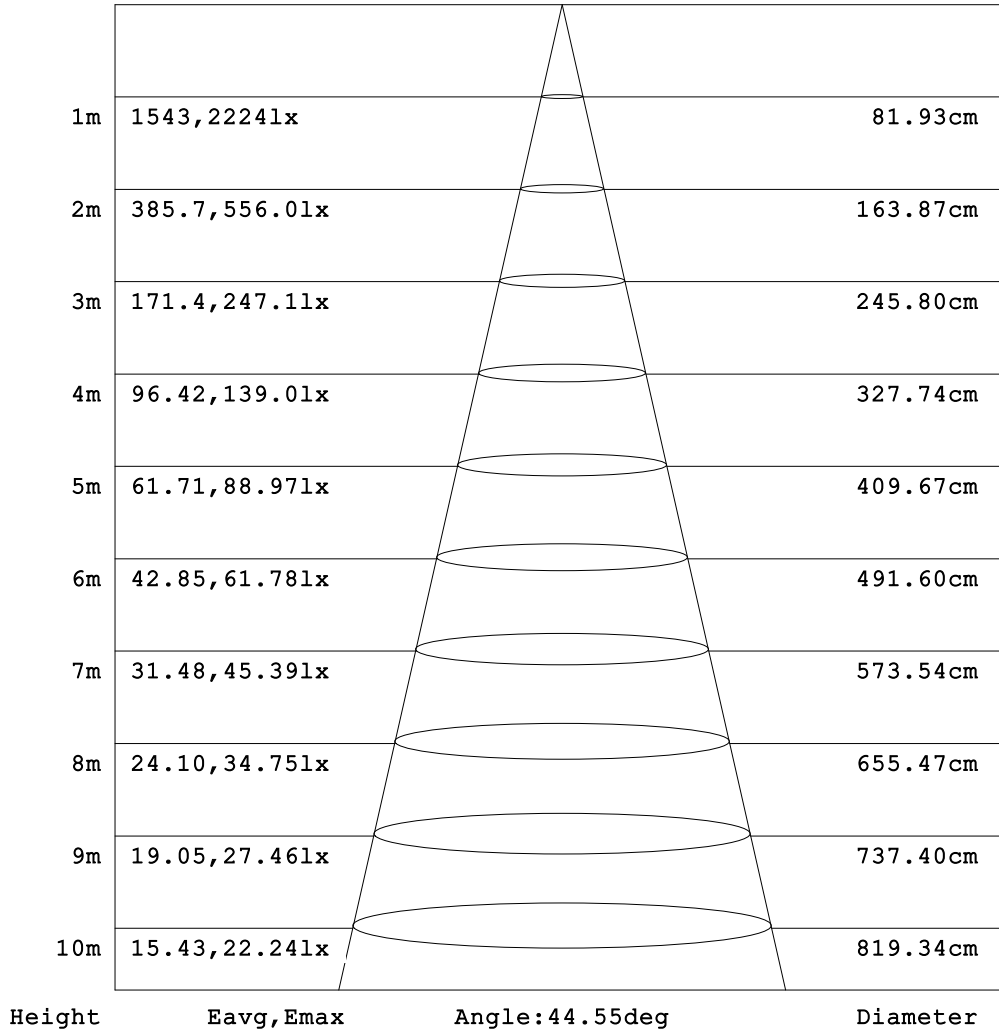


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.50V I:0.0970A P:20.800W PF:0.9660 Freq:50.00Hz Lamp Flux:1206.17x1 lm		
Name: NS99-18W	Type: LED	
MFR.: Lumega		

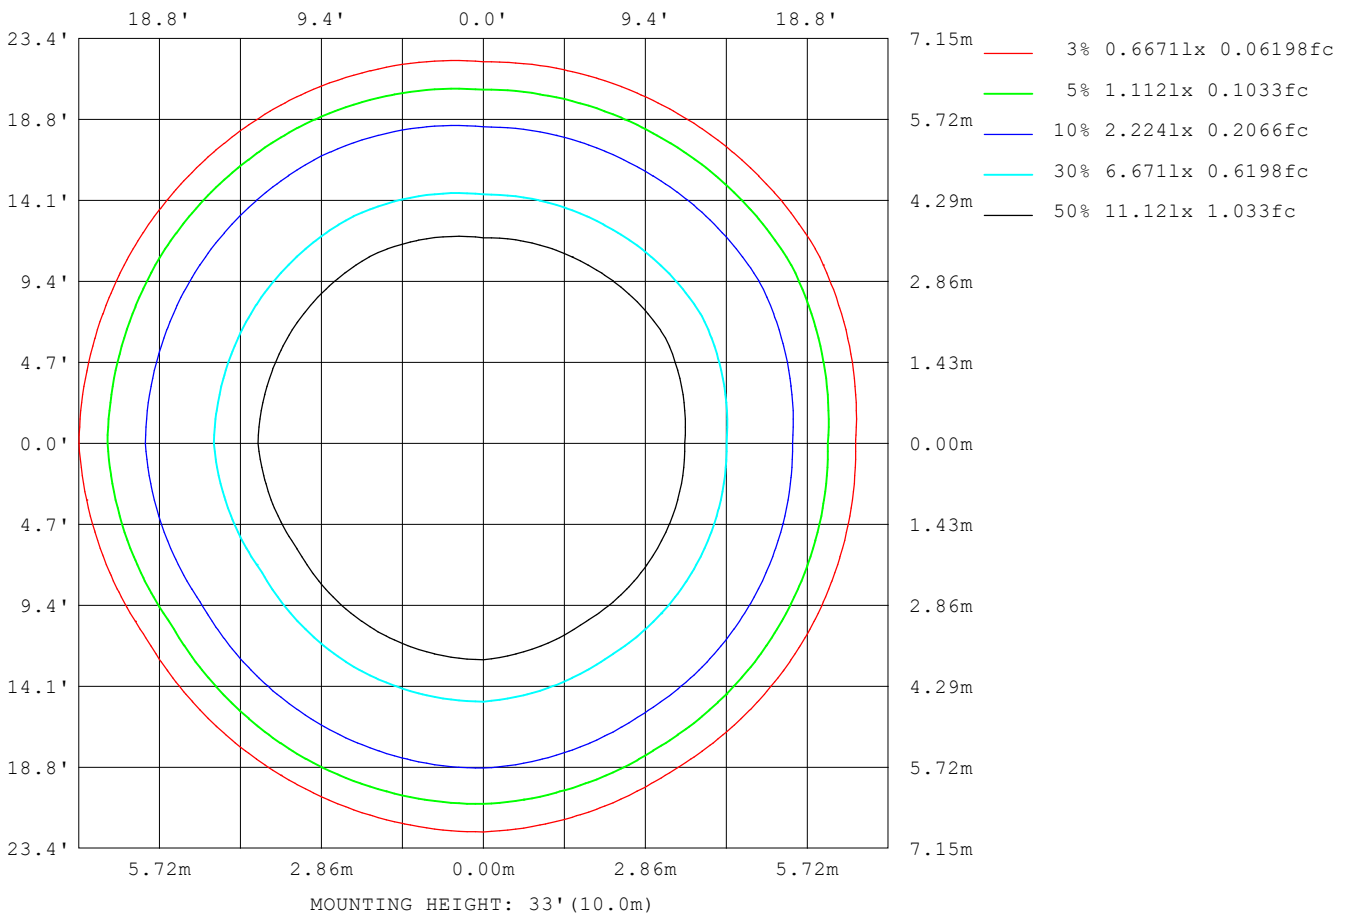

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks:

Planar Illuminance Curve

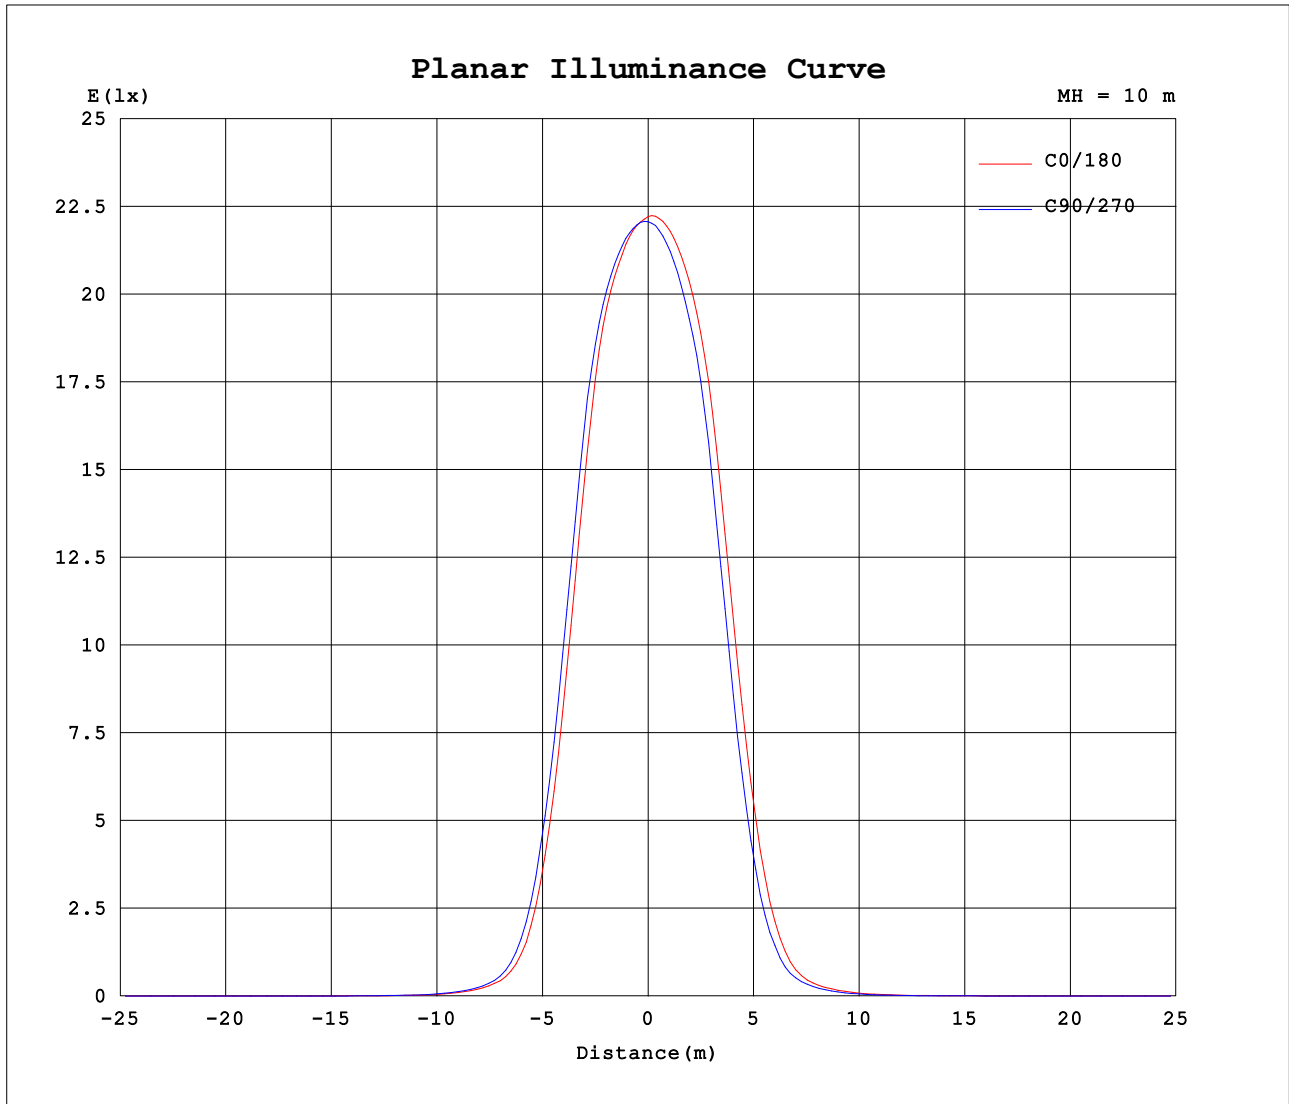

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.50V I:0.0970A P:20.800W PF:0.9660 Freq:50.00Hz		
Lamp Flux:1206.17x1 lm		
Name: NS99-18W	Type: LED	
MFR.: Lumega		

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2221	2218	2215	2206	2203	2199	2221	2218	2215	2206	2203	2199						
5	2189	2193	2196	2200	2198	2193	2220	2203	2193	2170	2168	2167						
10	2105	2114	2120	2148	2148	2129	2172	2144	2121	2072	2078	2089						
15	1843	1871	1889	1982	1968	1933	2026	2000	1958	1853	1865	1899						
20	1274	1301	1333	1476	1475	1443	1588	1552	1499	1332	1345	1399						
25	656	674	702	825	826	806	961	919	862	718	725	762						
30	236	253	266	327	328	325	414	398	359	280	277	298						
35	80.9	85.7	89.9	105	106	107	137	129	115	94.8	95.3	99.1						
40	35.6	37.7	39.6	44.3	45.1	45.2	56.2	51.8	48.9	41.1	42.9	43.6						
45	15.1	16.7	17.4	19.4	19.6	19.8	25.5	23.6	21.5	18.5	19.0	19.1						
50	7.79	8.50	8.68	8.45	8.72	9.28	11.9	11.1	10.3	9.58	9.19	9.07						
55	5.33	5.75	5.51	4.63	4.64	5.42	6.90	6.61	6.20	6.27	5.86	5.73						
60	3.88	4.18	3.97	3.28	3.31	4.04	5.41	5.24	4.90	4.95	4.67	4.53						
65	2.96	3.13	2.81	2.18	2.19	2.82	4.28	4.16	3.97	4.17	3.92	3.82						
70	2.25	2.36	2.04	1.56	1.58	2.11	3.75	3.70	3.55	3.74	3.53	3.49						
75	1.58	1.63	1.41	1.05	1.08	1.47	3.36	3.32	3.22	3.37	3.23	3.20						
80	1.01	1.05	0.90	0.68	0.70	0.97	3.06	3.05	2.99	3.10	2.97	2.97						
85	0.55	0.57	0.51	0.41	0.44	0.57	2.85	2.82	2.78	2.84	2.75	2.76						
90	0.17	0.16	0.23	0.26	0.29	0.33	2.69	2.67	2.62	2.59	2.50	2.48						
95	0.36	0.33	0.28	0.27	0.29	0.28	2.68	2.68	2.70	2.76	2.71	2.75						
100	0.58	0.54	0.51	0.49	0.50	0.51	2.98	2.99	3.00	3.08	3.01	3.07						
105	0.78	0.73	0.71	0.70	0.72	0.72	3.30	3.31	3.32	3.39	3.35	3.37						
110	0.95	0.90	0.88	0.88	0.90	0.90	3.56	3.55	3.55	3.60	3.55	3.58						
115	1.08	1.03	1.02	1.03	1.05	1.04	3.64	3.63	3.62	3.63	3.59	3.62						
120	1.19	1.14	1.14	1.16	1.17	1.17	3.60	3.58	3.56	3.54	3.50	3.55						
125	1.28	1.23	1.23	1.26	1.27	1.26	3.47	3.44	3.42	3.37	3.35	3.40						
130	1.31	1.26	1.27	1.31	1.32	1.30	3.28	3.24	3.21	3.14	3.10	3.16						
135	1.28	1.24	1.24	1.29	1.31	1.28	3.02	2.97	2.94	2.83	2.81	2.85						
140	1.20	1.15	1.16	1.21	1.22	1.20	2.65	2.60	2.55	2.43	2.38	2.45						
145	1.13	1.06	1.09	1.12	1.14	1.12	2.20	2.15	2.09	1.96	1.91	1.98						
150	1.09	1.06	1.04	1.08	1.11	1.08	1.72	1.68	1.63	1.54	1.51	1.52						
155	1.06	1.02	1.02	1.07	1.07	1.05	1.35	1.33	1.30	1.25	1.21	1.20						
160	1.00	0.96	0.96	1.02	1.03	1.01	1.11	1.10	1.09	1.06	1.02	1.01						
165	0.90	0.87	0.88	0.96	0.95	0.93	0.97	0.96	0.96	0.94	0.89	0.87						
170	0.82	0.79	0.80	0.86	0.84	0.84	0.86	0.86	0.83	0.80	0.78	0.76						
175	0.79	0.76	0.74	0.79	0.78	0.79	0.80	0.80	0.78	0.74	0.74	0.69						
180	0.77	0.78	0.73	0.78	0.78	0.76	0.79	0.79	0.78	0.76	0.79	0.70						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: